


Assignment

jc836 U.S. PTO
09/615045



PARKHURST & WENDEL, L.L.P.
1421 Prince Street, Suite 210
Alexandria, Virginia 22314-2805
Telephone: (703) 739-0220

Attorney Docket No.: PADE:047

Date: July 12, 2000

COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the patent application of

Inventor(s): Shinichiro UENO; Suguru FUJITA; Shinkichi IKEDA;
Kenichi MAEDA; Ushio SANGAWA

For: MOBILE BODY DISCRIMINATION APPARATUS FOR RAPIDLY ACQUIRING
RESPECTIVE DATA SETS TRANSMITTED THROUGH MODULATION OF
REFLECTED RADIO WAVES BY TRANSPONDERS WHICH ARE WITHIN A
COMMUNICATION REGION OF AN INTERROGATOR APPARATUS

Enclosed are:

- [x] Sixty-eight (68) sheets of formal drawings, Figures 1-73.
- [x] An Assignment of the invention to MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.
- [x] Certified copies of Japanese applications Nos. 11-197063 filed July 12, 1999; 11-197062 filed July 12, 1999; 11-197060 filed July 12, 1999; 11-272405 filed September 27, 1999.
- [x] A Declaration and Power of Attorney.
- [] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- [] A Preliminary Amendment is enclosed.
- [x] An Information Disclosure Statement.
- [] The Verified English-Language Translation, executed Declaration and Assignment and full filing fees will follow in due course.

0022720" 6436T350

	Number Filed	Number Extra	Rate	Basic Fee \$	690.00
Total					
Claims	70 - 20 =	50	x \$ 18.00=	\$	900.00
Independent					
Claims	1 - 3 =	0	x \$ 78.00=	\$	
Multiple Dependent Claim(s)					
(if applicable)			+ \$ 260.00=	\$	
Total					1,590.00
Reduction by 1/2 for filing Small Entity					
Assignment recordation fee			\$ 40.00=	\$	40.00
TOTAL FILING FEE					\$1,630.00

- [x] Our Check No. 12930 in the amount of the total filing fee is enclosed. However, if the check is missing or insufficient, the Commissioner is authorized to charge any additional fees which may be required, or credit any overpayment, to our Deposit Account No. 16-0331. Two duplicate copies of this sheet are enclosed.
- [x] The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to our Deposit Account No. 16-0331: any patent application processing fees under 37 CFR 1.17; and any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

PARKHURST & WENDEL, L.L.P.



Roger W. Parkhurst
Registration No. 25,177

(rev. 12/99)

07/12/00
JC772 U.S. PTO

JC836 U.S. PTO
09/615045
07/12/00

PARKHURST & WENDEL, L.L.P.
1421 Prince Street, Suite 210
Alexandria, Virginia 22314-2805
Telephone: (703) 739-0220

Attorney Docket No.: PADE:047

Date: July 12, 2000

COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the patent application of

Inventor(s): Shinichiro UENO; Suguru FUJITA; Shinkichi IKEDA;
Kenichi MAEDA; Ushio SANGAWA

For: MOBILE BODY DISCRIMINATION APPARATUS FOR RAPIDLY ACQUIRING
RESPECTIVE DATA SETS TRANSMITTED THROUGH MODULATION OF
REFLECTED RADIO WAVES BY TRANSPONDERS WHICH ARE WITHIN A
COMMUNICATION REGION OF AN INTERROGATOR APPARATUS

Enclosed are:

- [x] Sixty-eight (68) sheets of formal drawings, Figures 1-73.
- [x] An Assignment of the invention to MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.
- [x] Certified copies of Japanese applications Nos. 11-197063 filed July 12, 1999; 11-197062 filed July 12, 1999; 11-197060 filed July 12, 1999; 11-272405 filed September 27, 1999.
- [x] A Declaration and Power of Attorney.
- [] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- [] A Preliminary Amendment is enclosed.
- [x] An Information Disclosure Statement.
- [] The Verified English-Language Translation, executed Declaration and Assignment and full filing fees will follow in due course.

PLEASE ACCEPT THIS AS
AUTHORIZATION TO DEBIT
OR CREDIT FEES TO
DEP. ACCT. 16-0331
PARKHURST & WENDEL

09643043 071200

	Number Filed	Number Extra	Rate	Basic Fee \$	690.00
Total					
Claims	70 - 20 =	50	x \$ 18.00=	\$	900.00
Independent					
Claims	1 - 3 =	0	x \$ 78.00=	\$	
Multiple Dependent Claim(s)					
(if applicable)			+ \$ 260.00=	\$	
Total					1,590.00
Reduction by 1/2 for filing Small Entity					
Assignment recordation fee			\$ 40.00=	\$	40.00
TOTAL FILING FEE					\$1,630.00

- [x] Our Check No. 12930 in the amount of the total filing fee is enclosed. However, if the check is missing or insufficient, the Commissioner is authorized to charge any additional fees which may be required, or credit any overpayment, to our Deposit Account No. 16-0331. Two duplicate copies of this sheet are enclosed.
- [x] The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to our Deposit Account No. 16-0331: any patent application processing fees under 37 CFR 1.17; and any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

PARKHURST & WENDEL, L.L.P.



Roger W. Parkhurst
Registration No. 25,177

(rev. 12/99)

MOBILE BODY DISCRIMINATION APPARATUS FOR RAPIDLY
ACQUIRING RESPECTIVE DATA SETS TRANSMITTED THROUGH
MODULATION OF REFLECTED RADIO WAVES BY TRANSPONDERS
WHICH ARE WITHIN A COMMUNICATION REGION OF AN
INTERROGATOR APPARATUS

Field of the Invention

The invention relates to a mobile body discrimination apparatus in which an interrogator apparatus acquires data by non-contact communication from respective transponders, and in particular whereby such data are transmitted by modulated reflected radio waves

Types of mobile body discrimination apparatus are known in the prior art, whereby continuous-wave (abbreviated in the following to CW) radio waves, at frequencies which are typically in the microwave or UHF (ultra-high frequency) range, are produced from an interrogator apparatus and are reflected by an antenna of a transponder back to the interrogator apparatus, with the reflection characteristics of the transponder antenna being modulated in accordance with information such as transponder identification information, so that

the reflected radio waves convey that information to the interrogator apparatus. An example of such a system is described in Japanese patent HEI 1-182782. Other systems are known in the prior art whereby the DC supply power for operating the circuits of such a transponder is obtained by rectifying the radio waves received from the interrogator apparatus. Such an apparatus is for example described in Japanese patent SHO 63-5287.

Other types of systems are known whereby the interrogator apparatus is equipped with a directional antenna, which functions both to acquire data from transponders and to determine the size of a communication region (i.e., a region which transponders may enter and within which communication between a transponder and the interrogator apparatus is possible) in accordance with the level of transmission power of the interrogator apparatus. Such a system is described for example in Japanese patent HEI 6-71224. With another prior art system, spread-spectrum radio waves are transmitted by the interrogator apparatus to perform communication with transponders, as described in Japanese patent HEI 5-297131.

In the following, the prior art method described in Japanese patent HEI 1-182782 will be described,

referring to the drawings. Fig. 70 shows the configuration of a transponder 80 of that patent, forming part of a non-contact type of discrimination apparatus utilizing radio waves. In Fig. 70, 81 is an antenna, 82 is an oscillator, 83 is an address counter, 84 is a PROM (programmable read-only memory), and 85 is a FET (field effect transistor). The operation of this prior art mobile body discrimination apparatus will be briefly described in the following. Unmodulated radio waves, generated from an interrogator apparatus which is not shown in the drawing, are radiated to reach the transponder 80. Electrical power is continuously supplied to the internal circuits of the transponder 80, by means such as a battery, etc. The oscillator 82 generates a clock signal which is counted by the address counter 83, to thereby generate successive addresses of the PROM 84. When a predetermined address is output from the address counter 83, the PROM 84 generates a code that has been predetermined as specific to the transponder 80. This can for example be an ID (identification) code, which is one of respective ID codes that have been predetermined for various transponders. The FET 85 performs ON/OFF switching in accordance with the ID code, to produce corresponding variations in the impedance of the

antenna 81. In that way the transponder 80, by altering the impedance of the antenna 81 in accordance with the ON/OFF switching operations of the FET 85, produces corresponding alterations in the reflection

5 characteristics of the antenna 81, whereby radio waves that are modulated in accordance with the information that is stored in the PROM 84 are reflected back to the interrogator apparatus. The interrogator apparatus can then demodulate the resultant received radio signal, to
10 obtain the information from the transponder 80.

With such a type of transponder, since it is not necessary to provide any form of amplifier in the signal path within the transponder, the power consumption of the circuits of the transponder can be
15 made small. Hence, by rectifying the radio waves which are emitted from the interrogator apparatus, it becomes possible to obtain power for operating the electronic circuits of the transponder, so that the transponder can be implemented such as not to require a battery or
20 other power source. Various forms of such small-scale transponders have been proposed in the prior art, however the range within which communication between such a transponder and an interrogator apparatus can be performed depends upon the amount of power required to
25 operate the circuits of the transponder. Specifically,

the amount of power that is available for operating such a transponder is determined by the transmission power level of the interrogator apparatus, the directional characteristics of the antenna of the interrogator apparatus, and the rectification efficiency of the transponder, i.e., its efficiency in converting received radio waves into a DC power supply. In order to increase the size of the region within which communication can be executed between an interrogator apparatus and a transponder, the directional characteristics of the antenna of the interrogator apparatus can be set such as to illuminate a wide region with the radio waves which are transmitted by the interrogator apparatus. However such a widening of the antenna beam of the interrogator apparatus will result in a lowering of the antenna gain factor, so that the strength of the radio waves which are received by a transponder from that interrogator apparatus will be reduced, and the amount of electrical power which can be derived by a transponder will be lowered accordingly. If on the other hand the level of transmission power of the interrogator apparatus is increased, this may result in interference with other systems. Furthermore if the size of the communication region, within which communication can be executed

between the interrogator apparatus and transponders, is made large, then the problem arises that a plurality of transponders may be concurrently within that communication region. Conflict will thereby arise between respective received signals that are obtained simultaneously from a plurality of transponders by the interrogator apparatus, so that reliable acquisition of information from the transponders becomes difficult.

Another example of a prior art type of mobile body discrimination apparatus is described in Japanese patent HEI 9-123919, which is a non-contact IC card system.

Fig. 71 shows the communication method of this prior art IC card system. With this system, if a plurality of IC cards 8601a, 8601b, 8601c are within the communication area of an IC card reader/writer apparatus 8602, the apparatus 8602 can access each of those IC cards. The reader/writer apparatus 8602 specifies an initial condition 8603, and timings at which each of the IC cards 8601a, 8601b, 8601c is to transmit a response data block 8604 containing the ID code of the card. The reader/writer apparatus 8602 receives each response data block 604 transmitted by the IC cards 8601a, 8601b, 8601c, and notifies these if data conflict occurs. If conflict occurs, the

condition is changed by sending a retransmit request 8605 which specifies an altered condition.

For example the card 8601a transmits the response block 8606 after a time T_0 has elapsed following reception of the retransmit request, while the other cards 8601b, 8601c retransmit the response block 8606 after a time interval $T_0 + T (ID)$ has elapsed following reception of the retransmit request. The reader/writer apparatus 8602 processes the response block that has been successfully acquired from the card 8601a without data conflict. The reader/writer apparatus 8602 then again sends the retransmit request 8607, and the card 8601b transmits the response block 8606 after a time T_0 has elapsed following reception of the retransmit request, while the other card 8601c retransmits the response block 8606 after the time interval $T_0 + T (ID)$ has elapsed following reception of the retransmit request. By repetitions of such operations, response blocks are received from each of the cards 8601 without data conflict, and communication with a plurality of cards which are all currently within the communication region of the reader/writer apparatus 8602 is thereby achieved.

However with such a method of overcoming the problem of data conflict between transmissions that are

received by an interrogator apparatus (i.e., the IC card reader/writer apparatus) from a plurality of transponders, when these transmissions overlap along the time axis, it is difficult to rapidly acquire data from the transponders that are currently within the communication region of the interrogator apparatus since it is not possible to acquire data concurrently from two or more transponders. That is to say, if data conflict occurs, then at least one transponder must then subsequently wait to receive one or more "retransmit" requests from the interrogator apparatus, and respond one or more times to these "retransmit" requests. Thus, such a prior art form of mobile body discrimination apparatus has the disadvantage that respective sets of data cannot be rapidly acquired by the interrogator apparatus (IC card reader/writer) from a plurality of transponders which are all currently within the communication region of the interrogator apparatus.

Another disadvantage of the prior art is as follows. If the internal circuits of a transponder are powered by AC line power, or by an internal battery, then it is possible to perform complex signal processing and to generate an adequate level of transmission power. However such methods are not

appropriate with regard to achieving small size and light weight of a transponder, with low manufacturing cost and long operating life. For that reason, a type of transponder has been devised, for example as described in Japanese patent No. HEI 63-54023, whereby the power for operating the circuits of the transponder is obtained from radio waves that are directed to the transponder from an interrogator apparatus.

Fig. 72 shows the general features of the transponder which is disclosed in that patent. Here, microstrip lines 902 each having a length that is one half of the wavelength of the response signal, and a flat patch type of microwave antenna 8903 are formed by metallizing on a substrate 8901. Microwave radio waves which are received by the antenna are rectified by the diode 8904a, while a response signal is applied to diodes 8904b to be transmitted.

However with such a prior art arrangement for obtaining DC supply power to operate the circuits of a transponder, in order to maximize the amount of energy that is converted to DC supply power by the rectifier element, it is necessary to provide some form of impedance matching circuit for matching the impedance of the antenna to that of the rectifier element. In the prior art, such a matching circuit has been

implemented (e.g., as a fixed length of microstrip) on the assumption of using a rectifier element (such as the diode 904a in Fig. 71) which has predetermined standard characteristics. As a result, due to the manufacturing variations which actually occur in the characteristics of such diodes, it has not been possible to ensure that the energy of the received microwaves is efficiently converted to DC power.

Another disadvantage of the prior art technology is as follows. A prior art type of transponder which functions as a non-contact IC card, i.e., which can transmit and receive data to/from an interrogator apparatus (referred to as an IC card reader/writer apparatus) is described in Japanese patent No. HEI 8-252995. Fig. 73 shows the configuration of this prior art non-contact IC card. This has a substrate 7901 having a connecting lead pattern 7902 and an antenna 7903, for performing transmitting and receiving, formed as a patterned portion of a conductive layer on an upper face of the substrate, an insulating spacer 7904 having an aperture 7912 and a through-hole connector 7906 formed therein, and having a ground pattern layer 7905 (i.e., an electrically conductive layer which is connected to the ground potential of the circuits of the IC chip 7907) formed on an upper face 7904a of the

spacer, an adhesive film 7911 formed with apertures corresponding to the aperture 7912 and through-hole connector 7906, for attaching the upper face 7901a of the substrate 7901 to the lower face 7904b of the spacer 7904, bumps 7908 (i.e., protrusions formed of a material such as solder, formed on a flip-chip IC to serve as connector elements to the internal circuits of the IC and for attaching the IC to a connecting lead pattern which is formed on a substrate) disposed in the aperture 7912 of the spacer 7904, an anisotropic electrically conducting adhesive material 7909 for attaching and electrically connecting the circuit pattern 7902 to the bumps 7908 of the IC chip 7907, and an epoxy type of molding material 7910 which fills the spaces between the aperture 7912 of the spacer 7904 and the IC chip 7907.

Such a non-contact IC card can be used as a transponder of a mobile body discrimination system, in which case the IC card will be attached by its front or rear face to some article, which might for example be formed of metal. In such a case the problem arises that while the reader/writer unit should be able to receive data from a card irrespective of the direction of orientation of the faces of the card, if the IC card has some object located close to the rear face of the

card (i.e., the outer face of the substrate 7901), then the antenna 7903 may become substantially or completely shielded from incident radio waves. Thus, deterioration of the performance of the antenna 7903, and hence a deterioration or complete interruption of communication operation, can occur. Hence, such an IC card is not suitable for use as a transponder which may be attached to a surface of an article with the outer face of the substrate 7901 in proximity to that article.

In the following description and in the appended claims, the term "mobile body discrimination apparatus" will be used to signify a combination of an interrogator apparatus with a plurality of transponders which are designed to operate in conjunction with that interrogator apparatus, while the term "mobile body discrimination system" will be used to signify an overall system which includes such a mobile body discrimination apparatus in conjunction with means for effecting relative movement between a plurality of objects and an antenna (or plural antennas) of the interrogator apparatus, with each of the transponders being configured for transmitting data relating to the corresponding object to which it is attached.

Also, in the following description and in the appended claims, the term "scanning" of a plurality of transponders by an interrogator apparatus is to be understood as having a significance which broadly covers the concept of effecting relative motion between the interrogator apparatus and the transponders such that a successive transponders are brought within the communication region of an antenna of the interrogator apparatus. This motion may be continuous or it may be intermittent, for example the relative motion between the interrogator apparatus and respective groups of one or more transponder might in some cases be temporarily halted. In addition, the relative motion may be effected by moving the transponders with the interrogator apparatus held fixed in position, or by moving the interrogator apparatus with the transponders left in a stationary condition.

Furthermore in the following description and in the appended claims, unless otherwise indicated, the term "spread-spectrum radio waves" is to be understood as signifying spread-spectrum radio waves which are not modulated to convey information.

In addition, the term "directivity" is used herein to signify the direction of an axis of maximum antenna gain, of a directional antenna.

SUMMARY OF THE INVENTION

It is an objective of the present invention to overcome the above problems of the prior art.

According to a first aspect of the invention, it is an
5 objective to enable rapid and reliable communication operation between an interrogator apparatus and transponders of a mobile body discrimination apparatus, by reducing the possibility of data conflict between
10 respective sets of data that are transmitted by respective ones of a plurality of transponders which are all concurrently within the communication region of the interrogator apparatus.

That is achieved by arranging that the interrogator apparatus periodically transmits a
15 specific code, referred to in the following as the "Response Start command code" to the transponders which are within that communication region, requesting commencement of transmission of respective data sets by these transponders, with the interrogator apparatus
20 transmitting CW radio waves in the intervals between successive transmissions of that command code, and by configuring each of the transponders such as to transmit the corresponding data by modulation of reflected CW radio waves from the interrogator
25 apparatus which are incident on the antenna of the

transponder, after a specific delay time interval has elapsed following reception of that Response Start command code, with that delay time interval being separately determined as a randomly selected value (from within a fixed range of possible values)) by each of these transponders, and with a new random value being generated by each transponder each time that the Response Start command code is received.

In that way, the possibility of a plurality of transponders transmitting simultaneously, and thereby causing conflict between sets of data that are received by the interrogator apparatus, is substantially reduced.

As another aspect of the invention, each of the transponder is equipped with a power supply circuit which rectifies the received radio waves from the interrogator apparatus to derive power for operating the circuits of the transponder, and the interrogator apparatus of such a mobile body discrimination apparatus is provided with two antennas, which are spaced apart, so that the respective transmission beams of the antennas are incident on the transponders from two different directions, but with the communication regions of these antennas arranged to overlap to form a common communication region, through which the

transponders successively move. A first one of these antennas of the interrogator apparatus transmits only CW radio waves, while the second antenna periodically transmits the aforementioned "response start" command code to the transponders which are within that common communication region and transmits CW radio waves in the intervals between successive transmissions of that command code. In addition, the interrogator apparatus is configured such that transmission of the CW radio waves by the first antenna is interrupted during each of respective time intervals in which the Response Start command code is transmitted by the other antenna. In that way, it is ensured that the internal power supply circuit of each transponder can generate a sufficiently high level of power for operating the circuits of the transponder, irrespective of the orientation of the transponder in relation to the interrogator apparatus, since CW radio waves are incident on the antenna of each transponder from two different directions during each of the time intervals between transmissions of the Response Start command code.

This further serves to enable reliable communication operation between an interrogator apparatus and a plurality of transponders which are

concurrently within the communication region of that interrogator apparatus.

As an alternative arrangement, in the case of an application in which a stream of transponders moves
5 continuously or intermittently along a fixed path in a fixed direction, the communication region of the first antenna can be positioned spaced apart from but partially overlapping the communication region of the other antenna, such that the transponders will
10 successively move first through the communication region of the first antenna and thereby receive the CW radio waves from that antenna, then move through the communication region of the second antenna to then receive the CW radio waves and transmissions of the
15 Response Start command code from the second antenna.. This has the advantage that the stream of transponders can move more rapidly, since it can be ensured that the internal power supply circuit of each transponder which enters the communication region of the second antenna
20 will already be providing a sufficiently high level of power to fully operate the circuits of the transponder. This is desirable, since with a practical type of power supply circuit for a transponder, in which smoothing of a generated DC supply voltage is applied, a certain
25 amount of time will elapse between the point at which

radio waves first become incident on the antenna of the transponder and the point at which the level of output power that is available will become sufficient.

Hence, this aspect of the invention also serves to
5 enable reliable communication operation between an interrogator apparatus and a plurality of transponders which are concurrently within the communication region of that interrogator apparatus.

According to another aspect of the invention, when
10 a mobile body discrimination apparatus is applied in a mobile body discrimination system whereby a stream of items having respective transponders attached thereto are moved along a fixed path by means such as a conveyer belt, the antennas of the interrogator
15 apparatus are supported and enclosed within a housing which is formed of a material suitable for shielding of radio waves and is shaped with a central aperture, to permit transfer of the items with the transponders attached thereto through the central aperture by the
20 conveyer belt. If the mobile body discrimination apparatus has two antennas which are to be arranged such as to overlap to form a common communication region, then these antennas are attached within the housing, at respective positions located on the
25 periphery of the central aperture, respectively

oriented such as to form the common communication region (30) within the central aperture.

Alternatively, the antennas can be positioned and oriented such as to form two partially overlapping communication regions through which the transponders successively pass.

According to another aspect, the invention achieves the objective of providing a mobile body discrimination apparatus capable of rapidly acquiring respective sets of data from a plurality of transponders which are currently within a communication region of an interrogator apparatus, by providing the interrogator apparatus with two antennas which are spaced apart and oriented such that respective communication regions of the antennas will substantially entirely overlap one another in a common communication region, with these antennas being driven by two different types of spread-spectrum radio waves in the intervals between successive transmissions of the Response Start command code. This has the advantage that there the occurrence of standing waves within that common communication region is substantially eliminated, thereby eliminating variations in the level of electric field strength of radio waves received by transponders which are moving

through that communication region, i.e., variations caused by standing waves which can occur when both of the antennas transmit CW radio waves. Each of the antennas supplies a received signal to a corresponding receiving section, which can only demodulate a signal that is conveyed by modulated reflected spread-spectrum radio waves of the type which are transmitted by the corresponding antenna, and the interrogator apparatus is equipped with means for judging respective strengths of signals which are received via the two antennas. When a transponder transmits data by modulating the received radio waves which are of these two different types, then one of the resultant transmitted signals will be stronger than the other, as determined by the position of the transponder in relationship to the two antennas, and the data conveyed by the stronger one of these signals are selected by the interrogator apparatus to be stored in memory. In that way, greater reliability of acquiring data from a plurality of transponders within the communication region can be achieved.

More specifically, the interrogator apparatus of such a mobile body discrimination apparatus consists of first and second antennas, first transmitting means controlled by the control means to periodically drive

the first antenna to transmit modulated radio waves conveying a transmission start command code and to drive the first antenna to transmit spread-spectrum radio waves which have been generated using a first pseudo-noise code sequence during intervals between transmitting the transmission start command code, and second transmitting means which are controlled by the control means to periodically drive the second antenna to transmit modulated radio waves conveying the transmission start command code, and to drive the second antenna to transmit spread-spectrum radio waves which have been generated using a second pseudo-noise code sequence which is different from the first pseudo-noise code sequence, during intervals between transmitting the transmission start command code. The interrogator apparatus further includes first receiving means which are coupled to the first antenna for obtaining respective data sets which are transmitted from the transponders, conveyed by modulated reflected spread-spectrum radio waves which have been transmitted by the first antenna, and second receiving means which are coupled to the second antenna for obtaining respective data sets from the transponders, conveyed by modulated reflected spread-spectrum radio waves which have been transmitted by the second antenna, and means

for judging the respective strengths of two signals
being concurrently received via respective ones of the
two antennas and for storing data conveyed by the
stronger of these signals in a memory of the
5 interrogator apparatus.

With another form of such an apparatus in which
the interrogator apparatus transmits two different
types of spread-spectrum radio waves as described
above, it is arranged that when the transponders of
10 such a mobile body discrimination apparatus move as a
stream along a fixed path, for example when attached to
respective articles which are transported by a conveyer
belt, then the two communication regions of the two
antennas are positioned to the left and right sides
15 respectively of the center of that path, so that
approximately half of the transponders will reflect
only one type of spread-spectrum radio waves and the
majority of the remainder of the transponders will
reflect only the other type. In that way, the
20 interrogator apparatus can acquire respective sets of
data from two transponders which are respectively
situated in these two different communication regions
and are transmitting data concurrently, so that the
speed of acquiring data from the transponders can be
25 increased.

Alternatively, the two communication regions can be arranged respectively at an upstream position and a downstream position with respect to the flow of transponders, so that each transponder will pass successively through both of the communication regions. In that case, the mobile body discrimination apparatus is preferably configured such that each transponder transmits (together with its data set) an ID code and that when the interrogator apparatus successfully receives the ID code and data from a transponder which is passing through the upstream communication region, the interrogator apparatus then transmits a Transmission Halt command code together with the ID code of that transponder, with the transponder being configured to be thereby inhibited from making any further transmissions while passing through the remainder of that upstream communication region and through the downstream communication region. In that way, the same effect is achieved as if the number of transponders which pass through the downstream communication region were to be substantially reduced, so that the overall permissible rate of flow of transponders can be increased.

Alternatively, with such an arrangement of the two antennas, such a mobile body discrimination apparatus

can be configured with detector means located adjacent to the flow path of the transponders, at a position preceding (i.e., upstream from) the aforementioned upstream communication region, for detecting transfer of successive numbers of the transponders along the fixed path and for producing signals indicative of the numbers, and operation control means provided in the interrogator apparatus, responsive to the signals from the detector means for selectively enabling and inhibiting operation of at least a part the transmission circuits and receiving circuits corresponding to the upstream communication region (for example by switching off the supply of power to these circuits, to thereby reduce the energy requirements of the apparatus) in accordance with the detected rate of flow of the transponders.

According to another aspect of the invention, with a mobile body discrimination apparatus in which the interrogator apparatus transmits respectively different types of spread-spectrum radio waves via two antennas which define a common communication region, transmission via each of these antennas is alternately enabled and inhibited during successive time intervals, such that at any point in time, radio waves are transmitted from only one of the antennas. This serves

to increase reliability of receiving data from the transponders, and enables the circuit configuration of the interrogator apparatus to be simplified, since data are only received via one antenna at a time.

5 According to another aspect of the invention, with a mobile body discrimination apparatus in which the interrogator apparatus transmits respectively different types of spread-spectrum radio waves via two antennas, these antennas are polarizing antennas having
10 respectively different types of polarization, while in addition each of the transponders is provided with a polarizing antenna, and it is arranged that approximately half of the transponders have an antenna with the first type of polarization and the remainder
15 have an antenna with the second type of polarization. As a result, even if two antennas which are within the same communication region of the interrogator apparatus should each randomly determine approximately the same time point to begin transmitting data, no conflict will
20 occur in the data received by the interrogator apparatus, if these transponders have respectively different types of polarizing antennas. That is to say, the permissible number of transponders which can be currently located within a communication region can
25 be substantially increased without increasing the

frequency of occurrence of data conflict, so that the rate of scanning transponders can be effectively increased.

Alternatively, each of the transponders is
5 provided with two polarizing antennas, of the first and
second types of polarization respectively, and two
separate sets of transmitting/receiving circuits
coupled to these, each controlled to transmit
respective sets of data at a randomly determined time
10 point following reception of a transmission start
command code from the interrogator apparatus. In that
way, the interrogator apparatus can acquire two sets of
data (e.g., an identification code and data concerning
an object) concurrently from each transponder, i.e.,
15 transmitted in parallel by modulated reflected spread-
spectrum radio waves that are respectively of the first
and second polarization types and so are received via
respective ones of the two polarizing antennas of the
interrogator apparatus, so that the speed of acquiring
20 all requisite information from each of the transponders
within a communication region of the interrogator
apparatus can be substantially increased.

As a further alternative configuration of such a
mobile body discrimination apparatus in which the
25 interrogator apparatus transmits spread-spectrum

polarized radio waves of two different types of polarization via two antennas, each of the transponders can be provided with first and second polarizing antennas of the first and second types of polarization, with the first antenna being coupled to supply received signals to a receiving circuit and the second antenna being coupled to transmit signals which are generated by a transmitting circuit, i.e., as modulated reflected spread-spectrum polarized radio waves which convey a set of data. In that case, the interrogator apparatus can not only periodically transmit to each transponder the aforementioned Response Start command code, but can also at other times transmit to all of the transponders within a communication region (or to specific transponders, indicated by respective ID codes) arbitrary data, with these data being received via the first polarizing antenna of a transponder at the same time that the transponder is transmitting a response data set via the second polarizing antenna. In that way, for example, function such as updating the data held in a memory of a transponder can be performed without affecting the speed of acquiring data from each of the transponders that are within the communication region.

As a further alternative configuration of such a mobile body discrimination apparatus in which the interrogator apparatus transmits spread-spectrum polarized radio waves of two different types of polarization via two antennas, each of the transponders can be provided with first and second polarizing antennas of the first and second types of polarization, which are coupled to respectively separate transmission circuits and respectively separate receiving circuits, and also are coupled to respectively separate power supply circuits which rectify received radio waves to provide an internal power source for operating the circuits of the transponder, and with the transponder further including a power comparison section which compares the respective levels of supply power that are available from these two power supply circuits. The power comparison section judges which of the two antennas is currently receiving the higher level of incident radio waves, based on the available power supply levels, and applies control whereby the transmission and receiving circuits which are coupled to the antenna having that higher level of incident radio waves is set in the operating condition, while the transmission and receiving circuits which are coupled to the other one of the two antennas are set in

inoperative condition. In practice, the power levels can simply be judged based on respective output DC voltage levels.

5 In that way, it is ensured that each transponder performs transmission and receiving operation by utilizing the polarized radio waves received from the one of the antennas of the interrogator apparatus that is optimally oriented with respect to that transponder, i.e., a form of polarization diversity operation is
10 performed. Hence, greater speed and reliability of communication between the interrogator apparatus and the transponders which are currently within a communication region of the interrogator apparatus can be achieved.

15 More specifically, each transponder of such a mobile body discrimination apparatus can be formed of a first polarizing antenna having a first direction of polarization and a second polarizing antenna having a second direction of polarization, a first power supply
20 circuit coupled to the first polarizing antenna, for converting a signal received by the antenna to a supply of electrical power for operating at least a part of all circuits of the transponder, and a second power supply circuit coupled to the second polarizing
25 antenna, for converting a signal received by the

antenna to a supply of electrical power for operating
at least a part of all circuits of the transponder,
first receiving means coupled to the first polarizing
antenna, for obtaining the transmission start command
5 code and supplying the transmission start command code
to the response timing control means, second receiving
means coupled to the second polarizing antenna, for
obtaining the transmission start command code and
supplying the transmission start command code to the
10 response timing control means, first modulator means
controllable for varying a reflection condition of the
first polarizing antenna, and second modulator means
controllable for varying a reflection condition of the
second polarizing antenna, and a power comparison
15 circuit for judging which of the first and second power
supply circuits is currently providing a higher level
of supply power, and for applying control to enable
operation of the one of the first modulator means and
second modulator means which corresponds to the antenna
20 that provides the higher level of supply power while
inhibiting operation of the other one of the first
modulator means and second modulator means.

According to another aspect, the invention
provides a mobile body discrimination apparatus in
25 which each transponder performs the aforementioned

modulation of radio waves that are reflected from its antenna by applying amplitude modulation, and in particular multi-level ASK (amplitude shift keying) modulation, with an arbitrarily determined depth of ASK modulation being applied by a transponder each time that the Response Start command code is received. The interrogator apparatus in this case is configured to be capable of discriminating and separately storing respective sets of data which are transmitted using different depths of ASK modulation, so that it becomes possible for respective sets of data which are transmitted concurrently by two transponders within the communication region to be correctly received by the interrogator apparatus, if the two data sets have been transmitted using respectively different depths of ASK modulation. Each transponder performs this modulation by selecting alternate ones of a pair of arbitrarily absorber elements to be connected and disconnected to the antenna of the transponder, to thereby vary the degree of absorption of incident radio waves.

More specifically, each transponder of such an apparatus includes comprises modulator means having a plurality of absorber elements for applying respectively different degrees of absorption of the radio waves reflected by the antenna of the

transponder, response timing control means, selection control means for generating a selection control signal which specifies an arbitrarily determined pair of the absorber elements, and absorber element selector means controlled by the selection control signal to select a pair of the plurality of absorber elements each time that the Response Start command code is obtained by the receiving means, and for effecting variation of the reflection condition of the antenna by selectively connecting the selected pair of absorber elements to the antenna in accordance with a signal that is to be transmitted, to thereby perform amplitude modulation of the reflected radio waves with a modulation depth determined by the arbitrarily determined pair of absorber elements. In addition, the interrogator apparatus includes data processing means for operating on an output signal produced from the receiving means of the interrogator apparatus for extracting, from the output signal, respective sets of data which have been transmitted by the transponders by modulation utilizing the arbitrarily determined pairs of absorber elements.

Since such a mobile body discrimination apparatus enables data to be correctly acquired by the interrogator apparatus, without conflict, from two transponders which are within the communication region

and are transmitting (using respectively different depths of ASK modulation) concurrently, the number of transponders which can be concurrently within that communication region can be increased, i.e., the rate of scanning transponders can be increased.

Alternatively, such a mobile body discrimination apparatus can be configured such that each transponder responds to reception of the Response Start command code from the interrogator apparatus (after the aforementioned randomly determined time interval) by first transmitting a header containing an identification code, using a relatively high depth of amplitude modulation of the reflected radio waves, then transmitting a set of data by using a relatively low depth of amplitude modulation. The header also contains information for use by the interrogator apparatus in correctly extracting the transmitted data set in the event that conflict occurs between reception of that data set and of data transmitted at the same time by some other transponder. In addition, the interrogator apparatus is configured such that when a complete identification code and data set are received from a transponder, a command is transmitted to that transponder which has the effect of terminating any further transmissions from that transponder so long as

it remains within the communication region of the interrogator apparatus. In that way, data can be rapidly acquired in succession from the transponders which are currently within the communication region, without data conflict being produced as a result of any unnecessary transmissions from the transponders.

According to another aspect, the invention provides a mobile body discrimination apparatus in which each transponder performs the aforementioned modulation of radio waves that are reflected from its antenna by applying phase modulation, and in particular PSK (phase shift keying) modulation, by selecting a pair of phase shifters from a plurality of phase shifters and alternately connecting respective ones of the selected pair to the antenna of the transponder, in accordance with the data to be transmitted. Each transponder is configured such that when the transponder first enters a communication region of the interrogator apparatus, it responds to a first reception of the Response Start command code by transmitting an identification code and set of data through PSK modulation using a relatively small degree of phase shift, and responds to a second and any subsequent reception of the Response Start command code by transmitting an identification code and set of data

through PSK modulation using a relatively large degree of phase shift. The interrogator apparatus is configured such that when the identification code and data are successfully received from a transponder, a command signal is transmitted which has the effect of terminating any further transmissions from that transponder so long as it remains within the communication region of the interrogator apparatus. As a result, priority is automatically assigned to reception by the interrogator apparatus of data sent from any transponder which has made a first attempt at transmitting and has failed in that attempt (e.g., due to an unfavorable orientation of the transponder). Hence, data can be rapidly acquired from successive transponders which enter the communication region of the interrogator apparatus, with reduced possibility that a transponder might traverse the communication region without communicating successfully with the interrogator apparatus.

Alternatively, with such a mobile body discrimination apparatus, each transponder applies a fixed degree of phase shift in performing PSK modulation, but is configured such that when the transponder first enters a communication region of the interrogator apparatus, it responds to a first

reception of the Response Start command code by transmitting an identification code and set of data through PSK modulation using that fixed degree of phase shift, but with a specific amount of attenuation applied to the phase-modulated reflected radio waves, and responds to a second and any subsequent reception of the Response Start command code by transmitting the identification code and set of data through PSK modulation using the same degree of phase shift, but with the attenuation of the phase-modulated radio waves removed. In addition, as described above, the interrogator apparatus is configured such that when the identification code and data are successfully received from a transponder, a command signal is transmitted which has the effect of terminating any further transmissions from that transponder so long as it remains within the communication region of the interrogator apparatus.

Thus such an arrangement serves to ensure that the interrogator apparatus can assign priority to receiving data which are transmitted from a transponder which has failed in a first attempt at communication, since such data will be conveyed to the interrogator apparatus by radio waves at a higher amplitude than in the case of other transponders, enabling the interrogator apparatus

to recognize and appropriately process a signal which is received from such a transponder that has failed in a first attempt at communication.

According to another aspect, the invention
5 provides a rectifier circuit as a power supply circuit for deriving the operating power of a transponder from received radio waves, whereby optimum rectification efficiency can be achieved when such transponders are mass-manufactured, irrespective of manufacturing
10 variations in the impedance characteristics of the rectifier elements (in general, diodes).

Specifically, such a rectifier circuit includes a rectifier element, impedance matching means (such as a microstrip transmission line of predetermined length)
15 for transferring a signal received by the transponder antenna to an input terminal of the rectifier element, and a low-pass filter for smoothing a rectified output voltage produced at an output terminal of the rectifier element, with the rectifier circuit also including an
20 impedance adjustment element which is coupled to the rectifier element and is adjusted to optimize a degree of rectification efficiency of the rectifier circuit means, by applying compensation for a deviation of an impedance parameter of the rectifier element from a
25 nominal predetermined value of the parameter. In the

case of a diode rectifier element, the impedance parameter for which adjustment is applied is the value of capacitance between the diode terminals.

5 In the case of a such a rectifier circuit in which the diode is connected in series with the antenna, adjustment to compensate for the manufacturing deviations of the diode characteristics can be performed by variation of a capacitor that is connected between the input terminal of the diode and the output
10 terminal, i.e. the input of the low pass filter, while supplying a fixed-amplitude test signal in place of an antenna signal and monitoring the resultant available output power level from the rectifier circuit (e.g., as expressed by the on-load voltage) until that power
15 level attains a predetermined minimum acceptable value. In the case of a rectifier circuit in which the diode is connected in parallel with the antenna, such an adjustment capacitor is connected between the input terminal of the diode and the circuit ground potential.

20 When the transponder is manufactured as an integrated circuit chip (containing a rectifier circuit and the other circuits of the transponder) which is mounted as a bare chip on a substrate in flip-chip configuration (i.e., with connector "bumps" of the
25 integrated circuit chip directly attached to connecting

leads formed on that substrate), the invention provides a simple arrangement whereby the aforementioned compensation capacitor adjustment can be readily performed under conditions of mass-production. This is achieved by configuring the adjustment capacitor as a first conductive layer portion that is formed on the substrate and a second conductive layer portion that is disposed such as to be moved towards the first conductive layer portion as the integrated circuit chip is moved towards the substrate, e.g., by forming that second conductive layer portion on the same side of the integrated circuit chip as the "bumps" with the first conductive layer portion directly below. In that case, since the bumps are generally formed of a relatively ductile metal, the aforementioned capacitance adjustment can be performed by applying force in a direction such as to gradually move the integrated circuit chip towards the substrate (i.e., by compressing the "bumps") to thereby successively increase the value of the compensation capacitance.

Alternatively, impedance adjustment to compensate for the manufacturing variations of the rectifier element can be implemented by connecting an adjustable inductor in parallel with the rectifier element (i.e., in series with a DC blocking capacitor). In the case

of the above-mentioned flip-chip configuration, such an inductor can be formed on the substrate as a flat spiral inductor directly below the integrated circuit chip, with a number of downward-oriented electrically interconnected protrusions (e.g., formed of the same material as the "bumps") which are of respectively varying heights being formed on the integrated circuit chip. With that arrangement, variation of the inductor can be performed by applying force in a direction such as to gradually move the integrated circuit chip towards the substrate, to thereby successively decrease the value of the compensation inductance as successive adjacent portions of the spiral inductor become short-circuited by the protrusions.

As a further aspect, the invention provides a mobile body discrimination apparatus in which the radio waves transmitted by the interrogator apparatus are in the microwave frequency range, and each transponder is configured in the form of an IC card, (i.e., with a bare chip IC mounted on a substrate in flip-chip form as described above) and is capable of communicating with the interrogator apparatus, while within the communication region of the interrogator apparatus, irrespective of whether an arbitrarily determined face of the IC card is shielded from incident radio waves.

Thus, such transponders can be attached to various objects without regard for the orientations of the transponders on these objects. This is achieved by using a pair of slot antennas, one on either face of the IC card, to perform the functions of the transponder antenna such that even if one of the slot antennas becomes inoperative due to shielding, the other slot antenna will function effectively.

More specifically, such a transponder can be configured as an IC card having a substrate with patterned connecting leads formed on an upper face and an integrated circuit chip in bare chip condition, which constitutes respective internal circuits of the transponder and has a plurality of connector elements (i.e., "bumps") coupled to the internal circuits formed thereon, mounted on the upper face of the substrate, with the IC card comprising:

an antenna connecting lead constituted by a part of the patterned connecting leads, coupled through one of the connector elements to the internal circuits; and first and second layers of electrically conductive material formed respectively formed on opposite sides of the IC card, having respective slot apertures formed therein, the slot apertures being located in a predetermined position relationship to specific

portions of the antenna connecting lead to thereby constitute first and second slot antennas, with each of the slot antennas functioning independently of the other one as the antenna of the transponder.

5 In particular, such an IC card transponder can be configured with the antenna connecting lead having a first branch portion and a second branch portion which respectively extend from a junction thereof, each of
10 the first and second branch portions having a length that is determined in accordance with a wavelength of the radio waves transmitted by the interrogator apparatus, with the antenna connecting lead having a common portion which extends between the junction and one of the connector elements, and with the transponder
15 having:

a second substrate formed with an aperture for accommodating the integrated circuit chip and having a lower face thereof fixedly attached to the upper face of the first substrate;

20 a first layer of electrically conductive material formed over a lower face of the first substrate, having a first slot aperture formed therein, with the first slot aperture located directly over a part of the first branch portion of the antenna connecting lead;

25

a second layer of electrically conductive material formed over an upper face of the second substrate having a second slot aperture formed therein, with the second slot aperture located directly above a part of the second branch portion of the antenna connecting lead; and

connection means such as through-hole connectors, coupled to one of the connector elements of the integrated circuit chip and to each of the first layer of electrically conductive material and second layer of electrically conductive material, for connecting each of the layers to a ground potential of the internal circuits of the transponder.

In that case, the first slot aperture in conjunction with the first branch portion of the antenna connecting lead constitutes a first slot antenna and the second slot aperture in conjunction with the second branch portion of the antenna connecting lead constitutes a second slot antenna.

As a further aspect, the invention provides a mobile body discrimination apparatus in which the radio waves transmitted by the interrogator apparatus are in the microwave frequency range, and each transponder is configured in the form of an IC card, wherein the transponder antenna is implemented as a slot antenna of

co-planar form, which is shaped from a single layer of electrically conductive material formed on a substrate to which the IC is attached. Since the slot aperture and antenna connecting lead of such an antenna are co-planar, the directivity of the antenna is oriented perpendicular to the plane of the substrate surface. Hence, such a transponder can be attached to an object by either of its two main faces, with no danger that this will cause shielding of the antenna from incident radio waves.

More specifically, such a transponder, structured as an IC card having a substrate and an integrated circuit chip which constitutes respective internal circuits of the transponder and has a plurality of connector elements coupled to the internal circuits formed thereon, mounted in bare chip form on an upper face of the substrate, can consist of first and second portions of a patterned layer of electrically conductive material formed over the upper face of the substrate, with the first portion connected to the internal circuits and shaped to constitute a co-planar antenna connecting lead of a slot antenna, and the second portion connected to a ground potential of the internal circuits and shaped with a cut-out portion which extends to an edge of the upper face, to

constitute the slot antenna in conjunction with the antenna connecting lead.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a general system block diagram of a first embodiment of the invention, which is an interrogator apparatus and a transponder of a mobile body discrimination apparatus;

Fig. 2 is a block diagram for describing the configuration of a response timing control section of the transponder shown in Fig. 1;

Fig. 3 is a conceptual diagram showing a mobile body discrimination system, which utilizes a mobile body discrimination system of the form shown in Fig. 1;

Fig. 4 is a timing diagram for use in describing the operation of the mobile body discrimination apparatus shown in Fig. 1, with respect to transmission and reception of radio waves between the interrogator apparatus and transponder;

Fig. 5 is a conceptual diagram of a second embodiment of the invention, which is a mobile body discrimination system utilizing a mobile body discrimination apparatus of the form shown in Fig. 1;

Fig. 6 is a conceptual diagram for use in describing the transfer of data between a transponder and one of a plurality of antennas of the interrogator

apparatus in the mobile body discrimination apparatus of Fig. 1;

Fig. 7 is a conceptual diagram for use in describing the transfer of data between a transponder and respective ones of a pair of antennas of an interrogator apparatus in a mobile body discrimination apparatus according to a third embodiment of the invention;

Fig. 8 is a general system block diagram of an interrogator apparatus of the mobile body discrimination apparatus according to the third embodiment;

Fig. 9 is a conceptual diagram of a mobile body discrimination system which utilizes a mobile body discrimination apparatus according to a fourth embodiment of the invention;

Fig. 10 is a system block diagram of an interrogator apparatus of the mobile body discrimination apparatus according to the fourth embodiment of the invention;

Fig. 11 is a system block diagram of a transponder of a mobile body discrimination apparatus according to a fifth embodiment;

Fig. 12 is a timing diagram for describing the operation of the mobile body discrimination apparatus of the fifth embodiment;

5 Fig. 13 is a flow diagram for describing the operation of the mobile body discrimination apparatus of the fifth embodiment;

Fig. 14 is a system block diagram of an interrogator apparatus of a mobile body discrimination apparatus according to a sixth embodiment;

10 Fig. 15 is a conceptual diagram of a mobile body discrimination system which utilizes the mobile body discrimination apparatus of the sixth embodiment;

15 Fig. 16 is a conceptual diagram for describing the interchange of data by radio waves between two transponders and two antennas of an interrogator apparatus, with the mobile body discrimination apparatus of the sixth embodiment;

20 Figs. 17A, 17B are respective conceptual diagrams for describing the interchange of data by radio waves between a transponder and two antennas of an interrogator apparatus, in a first operation condition and second operation condition respectively of the interrogator apparatus, in a mobile body discrimination apparatus according to a seventh
25 embodiment;

Fig. 18 is a system block diagram of an interrogator apparatus of a mobile body discrimination apparatus according to the seventh embodiment;

5 Fig. 19 is a system block diagram of an interrogator apparatus of a mobile body discrimination apparatus according to an eighth embodiment;

Fig. 20 is a conceptual diagram of a mobile body discrimination system which utilizes the mobile body discrimination apparatus of the eighth embodiment;

10 Fig. 21 is a system block diagram of an interrogator apparatus of a mobile body discrimination apparatus according to a ninth embodiment;

15 Fig. 22 is a conceptual diagram for describing the interchange of data by radio waves between two transponders and two antennas of an interrogator apparatus, with the mobile body discrimination apparatus of the eighth embodiment;

20 Fig. 23 is a conceptual diagram for describing the interchange of data by radio waves between two transponders and two antennas of an interrogator apparatus, with the mobile body discrimination apparatus of a tenth embodiment;

25 Fig. 24 is a system block diagram of a transponder of the mobile body discrimination apparatus of the tenth embodiment;

Fig. 25 is a system block diagram of a transponder of a mobile body discrimination apparatus of an eleventh embodiment;

5 Fig. 26 is a system block diagram of an interrogator apparatus of a mobile body discrimination apparatus in accordance with an eleventh embodiment;

10 Fig. 27 is a conceptual diagram for describing the interchange of data by radio waves between a transponder having two polarized antennas having respectively different types of polarization and two antennas of an interrogator apparatus, having respectively different types of polarization, with the mobile body discrimination apparatus of an eleventh embodiment;

15 Fig. 28 is a conceptual diagram for describing the interchange of data by radio waves between two transponders, each having two polarized antennas with respectively different types of polarization, and two polarized antennas of an interrogator apparatus, with a
20 mobile body discrimination apparatus in accordance with a twelfth embodiment;

Fig. 29 is a system block diagram of an interrogator apparatus in accordance with a 13th embodiment of the invention;

Figs. 30A, 30B are conceptual diagrams for describing the interchange of data by radio waves between a transponder having two polarized antennas having respectively different types of polarization and two polarized antennas of an interrogator apparatus, having respectively different types of polarization, with the mobile body discrimination apparatus of the 13th embodiment;

Fig. 31 is a diagram illustrating the configuration of a housing in accordance with a 14th embodiment, for maintaining a plurality of antennas of an interrogator apparatus in respective specific position relationships to a moving stream of articles having respective transponders attached thereto, in a mobile body discrimination system;

Fig. 32 is a diagram for illustrating an alternative arrangement of a mobile body discrimination system, in which batches of transponder are successively transported to be brought within a communication region of an interrogator apparatus;

Fig. 33 is a diagram for conceptually illustrating a mobile body discrimination system in accordance with a 15th embodiment, wherein an interrogator apparatus of a mobile body discrimination apparatus is manually

transported to scan a plurality of transponders which are attached to respective stored articles;

Fig. 34A is a view in elevation of a mobile body discrimination system in accordance with a 16th embodiment, wherein an interrogator apparatus of a
5 mobile body discrimination apparatus is automatically moved to scan a plurality of transponders which are attached to respective stored articles;

Fig. 34B is a plan view corresponding to Fig. 33;

10 Fig. 35 is a system block diagram of a mobile body discrimination apparatus in accordance with a 17th embodiment, wherein a transponder applies a plurality of different degrees of absorption of radio waves received by an antenna, to effect ASK (amplitude shift
15 keying) modulation of reflected radio waves by selectively applying either a first or a second depth of ASK modulation;

Fig. 36 is a waveform diagram for describing the operation of a data processing section in an
20 interrogator apparatus of the mobile body discrimination apparatus of Fig. 35;

Fig. 37 is a circuit block diagram of an example of the internal configuration of the data processing section in the interrogator apparatus of the mobile
25 body discrimination apparatus of Fig. 35;

Fig. 38 is a system block diagram of the internal configuration of a response timing control section in a transponder of the mobile body discrimination apparatus of Fig. 35;

5 Fig. 39 is a system block diagram of a mobile body discrimination apparatus in accordance with an 18th embodiment, wherein a transponder applies a plurality of different degrees of absorption of radio waves received by an antenna, to effect ASK (amplitude shift keying) modulation of reflected radio waves by applying
10 a first depth of ASK modulation when performing an initial transmission of data after entering the communication region of the interrogator apparatus, and applying a second depth of ASK modulation for
15 subsequent transmissions;

Fig. 40 is a circuit block diagram of an example of the internal configuration of a data processing section in the interrogator apparatus of the mobile body discrimination apparatus of Fig. 39;

20 Fig. 41 is a system block diagram of the internal configuration of a response timing control section in a transponder of the mobile body discrimination apparatus of Fig. 39;

Fig. 42 is a flow diagram for describing the operation of the interrogator apparatus of the mobile body discrimination apparatus of Fig. 39;

5 Fig. 43 is a timing diagram for describing the interchange of identification codes and data between a plurality of transponders and the interrogator apparatus of the mobile body discrimination apparatus of Fig. 39;

10 Fig. 44 is a system block diagram of a mobile body discrimination apparatus in accordance with a 19th embodiment, wherein a transponder applies a plurality of different degrees of phase shift to radio waves received by an antenna, to effect PSK (phase shift keying) modulation of reflected radio waves by applying
15 a first depth of PSK modulation when performing an initial transmission of data after entering the communication region of the interrogator apparatus, and applying a second depth of PSK modulation for subsequent transmissions;

20 Fig. 45 is a system block diagram of the internal configuration of a response timing control section in a transponder of the mobile body discrimination apparatus of Fig. 44;

25 Fig. 46 is a timing diagram for describing the interchange of identification codes and data between a

plurality of transponders and the interrogator apparatus of the mobile body discrimination apparatus of Fig. 44;

Fig. 47 is a system block diagram of a mobile body discrimination apparatus in accordance with a 20th embodiment, wherein a transponder applies PSK (phase shift keying) modulation of reflected radio waves while applying a fixed degree of attenuation to the reflected radio waves, when performing an initial transmission of data after entering the communication region of the interrogator apparatus, and removes the attenuation when performing subsequent transmissions;

Fig. 48 is a system block diagram of the internal configuration of a response timing control section in a transponder of the mobile body discrimination apparatus of Fig. 47;

Fig. 49 is a timing diagram for describing the interchange of identification codes and data between a plurality of transponders and the interrogator apparatus of the mobile body discrimination apparatus of Fig. 47;

Fig. 50 is a system block diagram of a mobile body discrimination apparatus in accordance with a 21st embodiment, wherein a transponder applies a first depth of ASK modulation when transmitting an identification

code and a second depth of ASK modulation when transmitting data;

Fig. 51 is a timing diagram for describing the operation of the mobile body discrimination apparatus of Fig. 50;

Fig. 52 is a system block diagram of a data processing section in the interrogator apparatus of the mobile body discrimination apparatus of Fig. 50;

Fig. 53 is a flow diagram for describing the operation of the interrogator apparatus of the mobile body discrimination apparatus of Fig. 50;

Fig. 54 is a circuit diagram of a 22nd embodiment, which is a DC power supply circuit which derives power from received radio waves, for a transponder of a mobile body discrimination apparatus;

Fig. 55 is a graph showing a relationship between an inter-terminal capacitance value of a rectifier diode utilized in the power supply circuit of Fig. 54 and the rectification efficiency which is achieved by that circuit;

Fig. 56 is a diagram for conceptually illustrating the relationship between components in the circuit diagram of Fig. 54 and a physical configuration of a transponder;

Fig. 57 is a cross-sectional view in elevation of an integrated circuit chip containing components of the circuit of Fig. 55, mounted on a transponder substrate in a manner whereby the inter-terminal capacitance value of a rectifier diode of the power supply circuit can be optimized at the time of manufacture;

Fig. 58 is a circuit diagram of a 23rd embodiment, which is a DC power supply circuit which derives power from received radio waves, for a transponder of a mobile body discrimination apparatus;

Fig. 59 is a cross-sectional view in elevation of an integrated circuit chip containing components of a power supply circuit in accordance with a 24th embodiment, mounted on a transponder substrate in a manner whereby a parallel inductance value of a rectifier diode of the power supply circuit can be optimized at the time of manufacture;

Fig. 60 is a circuit diagram of the power supply circuit of the 24th embodiment;

Fig. 61 is a cross-sectional view in elevation of a transponder integrated circuit chip mounted in an IC card in accordance with a 25th embodiment of the invention, having respective microwave slot antennas formed on opposing faces of the card;

Fig. 62 is a diagram for illustrating the configuration of a two-branch antenna connecting lead for coupling the transponder integrated circuit to the slot antennas in the IC card of Fig. 61;

5 Fig. 63 is a cross-sectional view in elevation of a transponder integrated circuit chip mounted in an IC card in accordance with a 25th embodiment, having respective microwave slot antennas formed on opposing faces of the card, wherein a ground pattern layer for an antenna is partly constituted by a conductive layer
10 formed upon the transponder integrated circuit chip;

 Fig. 64 is a cross-sectional view in elevation of a transponder integrated circuit chip mounted in an IC card in accordance with a 27th embodiment, having
15 respective microwave slot antennas formed on opposing faces of the card, containing an antenna chip as a separate component which constitutes one of the slot antennas;

 Fig. 65 is a cross-sectional view in elevation of a transponder integrated circuit chip mounted in an IC
20 card in accordance with a 28th embodiment, having respective microwave slot antennas formed on opposing faces of the card, wherein the antenna slots are covered by respective films of a dielectric material,
25 to enable the slot size to be reduced;

Fig. 66 is a conceptual diagram in accordance with a 29th embodiment, of an IC card and an IC card reader/writer apparatus utilized to implement a mobile body discrimination system, wherein the IC card is provided with respective slot antennas on a face which is attached to an article and on an opposing face thereof, to enable communication with the reader/writer apparatus irrespective of the manner of attachment;

Figs. 67A, 67B are cross-sectional views in plan and elevation respectively of an IC card in accordance with a 30th embodiment, having a slot antenna which is configured to be co-planar with a ground pattern layer and connecting lead of the antenna;

Fig. 68 is a conceptual diagram for illustrating how the sideward-oriented directivity of the antenna of the IC card of Figs. 67A, 67B is utilized when communicating with a reader/writer apparatus;

Fig. 69 is a cross-sectional view in elevation of an IC card which is a modified version of the 26th embodiment, having two separate pairs of slot antennas;

Fig. 70 is a circuit diagram of an example of a prior art type of transponder for a mobile body discrimination apparatus which utilizes modulation of reflected radio waves to achieve non-contact communication;

Fig. 71 is a timing diagram for use in describing an example of a prior art type of mobile body discrimination system which utilizes IC cards, and enables communication with successive ones of a plurality of IC cards which are concurrently within a communication region of a card reader/writer apparatus;

Fig. 72 is a diagram for describing a prior art example of a transponder of a mobile body discrimination apparatus wherein the transponder derives a DC power supply from received radio waves; and,

Fig. 73 is a cross-sectional view in elevation of an example of a prior art type of IC card.

DESCRIPTION OF PREFERRED EMBODIMENTS

1st Embodiment

A first embodiment of the invention will be described in the following, referring to Figs. 1 to 3. In Fig. 1, numeral 1 denotes an interrogator apparatus which transmits radio waves of high frequency, for example in the microwave range, 20 denotes a transponder which may be one of a plurality of transponders which are currently capable of communicating with the interrogator apparatus, 2 denotes a first antenna of the interrogator apparatus, 1, 3 denotes a circulator which is connected to the

first antenna 2, 4 denotes a receiving section which is connected to the circulator 3, 5 denotes a demodulator section for demodulating the output from the receiving section 4, 6 denotes a control section, 7 denotes a modulator section which is connected to the circulator 3 and generates a modulated output signal having a frequency in the microwave range, 8 denotes a source, such as an oscillator, of a high frequency signal having a fixed frequency, 9 denotes a memory, 10 denotes a second antenna, 11 denotes a transmitting section which is connected to the second antenna 10, and 12 denotes a second source, such as an oscillator, which generates a high frequency signal having a fixed frequency.

Numeral 24 denotes the antenna of the transponder 20, 21 denotes a rectifier circuit which is connected to the antenna 24, 22 denotes a modulator section which is connected to the antenna 24, 23 denotes a memory which is connected to the modulator section 22, and 25 is a receiving and demodulator section that is connected to the antenna 24 for demodulating request signals which are sent from the interrogator apparatus 1 as modulated microwave transmissions. Numeral 26 denotes a response timing control section which is connected to the receiving and demodulator section 25

and which determines the timings at which data are transmitted to the interrogator apparatus 1 in response to request signals transmitted from the interrogator apparatus.

5 Fig. 3 is a conceptual diagram for showing the position relationships between the interrogator apparatus 1 and a plurality of transponder 20 of an mobile body discrimination system embodiment. In Fig. 3, numeral 30 denotes a communication region (whose
10 boundary defines the limit of the area within which a transponder may be located and be able to communicate with the interrogator apparatus 1), and 31 denotes respective load items which can be of various different sizes, such as pieces of baggage, with each of these
15 having a transponder 20 attached thereto. 32 denotes a conveyer belt which transports the load items 31 in the direction indicated by the arrow. The respective communication regions for the first antenna 2 and the second antenna 10 of the interrogator apparatus 1 are
20 substantially identical in size and are positioned to overlap one another to form a single communication region 30, but the two antennas emit radio waves in respectively different directions with respect to the transponder 20. For example as shown, the first

antenna 2 and the second antenna 10 can be located on opposite sides of the conveyer belt 32.

Fig. 2 is a block diagram showing an example of the internal configuration of the response timing control section 26 of the transponder 20 shown in Fig. 1. In Fig. 2, the output signal from the receiving and demodulator section 25 is supplied to a Response Start command code detection section 20a of the control section 26, which detects each occurrence of a Response Start command code (transmitted periodically by the interrogator apparatus as described hereinafter). When that command is detected, the Response Start command code detection section 20a activates a random number generating section 20b to generate a random number, whose value is supplied to a delay time determining section 20c. The delay time determining section 20c then determines a delay interval whose length is based on the received random number, and generates a trigger signal after that delay interval has elapsed, which is supplied to a control signal generating section 20d. The control signal generating section 20d responds to that trigger signal by generating a control signal for setting the modulator section 22 in an operational condition, and also supplies a read-out control signal to the memory 23, which thereby reads out a data

sequence expressing the information stored therein, which is supplied to the modulator section 23, to modulate the radio waves which are reflected by the antenna 24.

5 The overall operation of this mobile body discrimination system is as follows. The interrogator apparatus 1 and second antenna 10 are positioned beforehand at respective fixed locations, adjacent to the conveyer belt 32. A transponder 20 which enters the communication region 30 receives CW microwave-band radio waves, transmitted from the second antenna 40 of the interrogator apparatus 1, at the antenna 24 of the transponder 20, and the rectifier circuit 21 converts the received CW signal to a DC power supply for
10 operating the various circuits of the transponder 20. The rectifier circuit 21, whose output DC supply voltage is designated in Fig. 1 as V_p , can be configured of devices such as diodes, etc. When thus supplied with operating power, the modulator section 22
15 modulates the reflected radio waves which result from the CW transmission from the interrogator apparatus 1, with that modulation being in accordance with the predetermined information that is held stored in the memory 23.
20

It will be assumed that this is amplitude modulation, performed by varying the reflection coefficient of the antenna to thereby vary the amplitude of reflected radio waves which are received from a transponder 20 by the interrogator apparatus. However it would be equally possible to use phase modulation.

The resultant modulated reflected signal that is received from the transponder 20 by the first antenna 2 of the interrogator apparatus 1 is transferred via the receiving section 4 to be demodulation by the demodulator section 5, with the information held at the transponder 20 being thereby acquired by the interrogator apparatus 1.

The timings at which information is received from the transponder 20 by the interrogator apparatus 1 will be described referring to Fig. 4. This is a general timing diagram of the exchange of signals between the interrogator apparatus 1 and a transponder 20. In Fig. 4 the uppermost portion, designated as "antenna 2", illustrates the timing of signals which are transmitted by the first antenna 2 of the interrogator apparatus 1, the central portion (designated as "second antenna 10") illustrates the timing of signals which are transmitted from the second antenna 10 of the interrogator

apparatus 1, and the lowermost portion (designated as "transponder 20") illustrates the timing of signals which are transmitted by a transponder 20. Numeral 60 denotes the Response Start command code, which is formed of a few bits of data and is transmitted periodically by modulating the radio waves transmitted from the first antenna 2, 61 denotes response data which are sent from a transponder 20 to the interrogator apparatus 1, 62 denotes a delay time interval which extends from the timing of a Response Start command code 60 until the transponder 20 begins to transmit a set of response data 61 (i.e., as a modulated reflection signal) in response to that Response Start command code 60. Numeral 63 denotes the CW transmission produced from the first antenna 2, 64 denotes the CW transmission produced from the second antenna 10, 65 denotes a transmission interruption interval which is synchronized with the Response Start command code 60 and has at least as long a duration as the Response Start command code 60, during which transmission from the second antenna 10 is halted.

The control section 6 of the interrogator apparatus 1 periodically reads out from memory 9 a code expressing the Response Start command code 60, which has been stored in the memory 9 beforehand, and

supplies that code to the modulator section 7 together with a control signal which sets the modulator section 7 in operation to transmit the Response Start command code 60 from the first antenna 2. The CW radio waves 63 are transmitted during the intervals between transmission of the Response Start command code 60. The control section 6 also controls the transmitting section 11 such that transmission of the CW radio waves 64 from the second antenna 10 is interrupted during each of respective transmission interruption intervals 65, i.e., during each of the periods during which the Response Start command code 60 is being transmitted from the first antenna 2. This interruption can be performed for example by temporarily inactivating an amplifier within the transmitting section 11. At all other times, the control section 6 causes the CW output 64 to be transmitted.

As a result, the transponder 20 can receive and demodulate the Response Start command code 60 from the first antenna 2 without such reception being affected by CW radio waves transmitted from the second antenna 10.

When a transponder 20 has moved within the communication region 30, the CW transmissions 63, 64 from the interrogator apparatus 1 are received by the

antenna 24, and DC power is thereby produced by the rectifier circuit 21 to operate the circuits of the transponder 20. When the Response Start command code 60 is received and demodulated by the receiving and demodulator section 25, a random delay interval 62 is then determined by the response timing control section 26, whose start is synchronized with the demodulated Response Start command code 60. After that delay interval 62 has elapsed, the modulator section 22 effects modulation of the reflected CW radio waves 63, which are reflected back to the interrogator apparatus 1, with that modulation being in accordance with the response data 61, which express the aforementioned information which is held in the memory 23 of the transponder 20 and in general will be information relating to the particular load item to which the transponder is attached.

The response data 61 are received by the first antenna 2 of the interrogator apparatus 1, and supplied to the receiving section 4 and so to the demodulator section 5, with the resultant output signal providing the interrogator apparatus 1 with the response data 61 which are held in the memory 23 of the transponder 20.

The Response Start command code 60 is transmitted repetitively at periodic intervals, and, considering

any specific transponder 20 which is currently within the communication region 30, the delay interval 62 is randomly altered each time that the Response Start command code 60 is received. Thus, when a plurality of transponders 20 are concurrently within the communication region 30 so that each transponder receives the Response Start command code 60 simultaneously, the random determination of transmitting respective responses by these transponders will reduce the probability that a condition will occur whereby two or more of these transponders will each transmit their respective sets of response data 61 simultaneously, i.e., a condition whereby the interrogator apparatus 1 cannot correctly acquire these respective sets of response data 61 due to data conflict. Furthermore since the Response Start command code is repetitively transmitted by the interrogator apparatus as the transponders traverse the communication region 30, even if a first response from a transponder is not correctly received by the interrogator apparatus due to data conflict, there is a high probability that a subsequent response by that transponder will be correctly received before the transponder exits from the communication region.

Thus, this embodiment serves to increase the speed and reliability of successive acquisition of respective sets of response data from the various transponders 20 which are passing through the communication region 30 of the interrogator apparatus 1.

The maximum distance between the interrogator apparatus 1 and transponder 20 for which communication is possible is determined by the lengths of the circuit lead paths in the transponder 20, which determine the impedance characteristics of the transponder 20, and the level of electrical power that is provided by the rectifier circuit 21 of the transponder 20. If only the antenna 2 were to be provided on the interrogator apparatus, as in the case of a prior art system, then the level of electrical power provided by the rectifier circuit 21 would depend upon the level of received electric field strength of the CW radio waves 63 received from the interrogator apparatus 1, at the antenna 24 of the transponder 20. This received electric field strength depends upon the distance between the antennas of the interrogator apparatus 1 and the transponder 20, and also upon the orientation (in relation to the antenna 2 of the interrogator apparatus) of the antenna 24 of each transponder 20,

which will be determined by the orientation of the load item 31 on which that transponder is mounted.

Hence, with only a single antenna being utilized by the interrogator apparatus, the level of electrical power that can be generated in a transponder that enters the communication region 30 may vary considerably, depending upon the orientation of the transponder (i.e., since the transponders 20 may be mounted, at arbitrary positions, on load items 31 which vary substantially in size, and in general the load items 31 will not be uniformly arranged on the conveyer belt 32).

However with the present invention, since CW radio waves 63, 64 are received by a transponder 20 from two antennas 2, 10 of the interrogator apparatus 1, which are located at respectively different locations, even if the orientation of a transponder 20 varies in relation to the interrogator apparatus, it will be possible for the transponder 20 to derive sufficient electrical power to operate its internal circuits at all times while traversing the communication region 30. That is to say, variations in the level of electrical power derived by the transponder 20 can be made small, and it thus becomes unnecessary to provide a high level of transmission power for the interrogator apparatus 1,

in order to ensure that a sufficient level of
transponder internal DC power will be generated, even
in the case of a transponder 20 which attains the most
adverse orientation. This enables the problem of
5 interference between the transmissions from the
interrogator apparatus 1 and other systems to be
substantially reduced, and also eliminates the need to
make the interrogator apparatus 1 large in size, while
ensuring that the mobile body discrimination apparatus
10 will provide reliable and stable communication between
the interrogator apparatus 1 and each transponder 20.

Although in the above description the term
"communication region" is used in relation to a region
that is illuminated by radio waves from antenna 10 of
15 the interrogator apparatus 1, it will be understood
that no actual communication occurs with the
transponders via that antenna. In that case the
"communication region" is used in relation to antenna
10 for ease of understanding that a communication
20 region 30 is formed by overlapping incident CW radio
waves from the antennas 2 and 10 respectively, in the
intervals between transmissions of the Response Start
command code, with that communication region 30 being a
region within which reliable communication between a
25 transponder and the interrogator apparatus (via antenna

2) is possible. It can for example be arranged that the respective levels of incident radio waves from antenna 2 and from antenna 10, within the communication region 30, are approximately identical.

5 For ease of understanding the relationship between the modes of data interchange between the interrogator apparatus and transponders of this embodiment and those of other embodiments of the invention described in the following, Fig. 6 is a conceptual diagram for
10 illustrating the flow of data, conveyed by radio waves, between the interrogator apparatus 1 and a transponder 20 that is within the communication region 30, in the case of the first embodiment. The transfer of the Response Start command code is indicated by the arrow
15 extending from the antenna 2 of the interrogator apparatus to the antenna 24 of the transponder, while the transfer of the response data is indicated by the arrow extending from the antenna 24 of the transponder to the antenna 2 of the interrogator apparatus.

20 2nd Embodiment

Fig. 5 is a diagram showing the general arrangement of position relationships between the interrogator apparatus 1 and transponders 20 of a
25 second embodiment of a mobile body discrimination apparatus, applied to a specific example of a mobile

body discrimination system in which, as for the preceding example, load items with respective transponders attached thereto flow along a fixed path in a fixed direction. In Fig. 5, 33 denotes a first communication region which is that of the first antenna 2 and 34 denotes a second communication region which is that of the second antenna 10. The second communication region 34 is positioned before (i.e., upstream from) the first communication region 33, with respect to the direction of flow of the load items, and partially overlaps the first communication region 33. The internal circuit configurations of the interrogator apparatus 1 and each transponder 20 are as shown in Fig. 1, described hereinabove, and the operation of each of these is as described for the first embodiment.

With this embodiment and the preceding embodiment, as is well known, the rectifier circuit 21 of a transponder 20 includes devices such as smoothing capacitors, etc., for removing AC components from the DC power supply that is obtained by rectifying the radio waves received by the antenna 24 and for ensuring stability of that DC power supply. Thus in the case of the first embodiment, when a transponder 20 first enters the communication region 30 and generation of electrical power by the rectifier circuit 21 begins,

the supply voltage produced from the rectifier circuit 21 will increase only gradually, as a result of incorporating such smoothing devices. Thus, there will be a certain amount of delay before the circuits of the transponder actually become operational, after a transponder has entered the communication region 30.

However with the second embodiment of the invention the transponders 20, attached to each of the load items which are transported by the conveyer belt 32, first move into the second communication region 34, whereby electrical power is generated by the rectifier circuit 21 from the CW radio waves which reach the antenna 24 from the second antenna 10 of the interrogator apparatus 1. As a result, when the transponder thereafter reaches the first communication region 33 (which as stated above is positioned such as to partially overlap with the communication region 34), electrical power derived from the second communication region 34 is already being supplied at that time to the circuits of the transponder 20. Hence, modulated radio waves conveying the Response Start command code 60 which is transmitted from the first antenna 2 of the interrogator apparatus 1 can be accurately demodulated by the transponder 20 within a short time after the transponder has entered the first communication region

33, and the transponder 20 will thereafter transmit the response data 61 (as described hereinabove for the first embodiment).

In the same way as for the first embodiment, a method of modulation of the response data 61 is used which is based on the Response Start command code 60 that is generated by the interrogator apparatus 1, with the timing of generating the response data 61 by a transponder 20 being determined by a random delay time interval 62 as described referring to Fig. 3. With that method, to ensure that information can be reliably obtained from each of a plurality of transponders 20 which are within the communication region at the same time, it is necessary to ensure that each of the transponders 20 remains within the communication region for a sufficiently long time interval. This is due to the fact that each transponder 20 must remain within the communication region for a sufficiently long time interval to begin to generate a level of electrical power that is high enough to operate the circuits of the transponder. However there are restrictions on the size of such a communication region, to ensure a sufficiently high level of the radio waves received by the transponders within the communication region.

Thus with the first embodiment, the time available for communication between the interrogator apparatus 1 and each transponder 20 which enters the communication region 20 is determined by:

- 5 (a) the size of the communication region (more specifically, the distance which is traversed by each transponder when passing through the communication region),
- (b) the rate of motion of the load items, and
- 10 (c) the time required for the supply power available from the rectifier circuit 21 of a transponder 20 to reach a sufficient level for operating the circuits of the transponder, after the transponder has entered the communication region.

15 With the second embodiment of the invention however, before each transponder 20 begins to move within the first communication region 33, the circuits of the transponder 20 are already being supplied with electrical power, so that when the transponder moves
20 into the first communication region 33, communication can immediately be established with the interrogator apparatus 1. Hence, almost all of the time for which a transponder 20 remains within the first communication region 33 is available for communication with the
25 interrogator apparatus 1, so that when a plurality of

transponders 20 are simultaneously within the first communication region 33, a greater amount of time can be made available for successively obtaining information from each of these transponders, with the second embodiment.

3rd Embodiment

Fig. 8 shows the general internal circuit configuration of an interrogator apparatus of a third embodiment of the invention, for communicating which transponders 20 which are each configured as described for the first embodiment hereinabove. In Fig. 8, numeral 100 denotes the interrogator apparatus, 20 denotes a transponder, 2 denotes a first antenna of the interrogator apparatus 100, 3 denotes a circulator which is connected to the first antenna 2, 4 denotes a receiving section which is connected to the circulator 3, 15 denotes a mixer which is connected to the receiving section 4, 5 denotes a demodulator section for demodulating the output signal from the mixer section 15, 6 denotes a control section which performs overall control of the operation of the interrogator apparatus, 7 denotes a modulator section which supplies a modulated output to the circulator 3, 8 denotes a fixed-frequency high frequency signal source such as an oscillator, 13 denotes a first spreading section for

generating a spectrum-spreading pseudo-noise code sequence, which receives the high-frequency signal produced from the oscillator 8 and supplies output signals to the modulator 7 and mixer 15 respectively.

5 Numeral 9 denotes a memory having one or more sets of data stored therein beforehand, comprising at least a data code expressing the Response Start command code contents. Numeral 10 denotes a second antenna which is coupled via a circulator 93 to a modulator 97 and to a

10 receiving section 94, mixer 115 and demodulator 95 in the same manner as for the first antenna 2. Numeral 14 denotes a second spreading section, which generates a spectrum-spreading pseudo-noise code sequence that is different from that generated by the first spreading

15 section 13, which is connected between the oscillator 8 and the modulator 97 and mixer 115. Numeral 116 denotes a signal strength comparator, for judging which of the two signal receiving paths from the antennas 2 and 10 respectively is currently deriving the highest

20 level of demodulated signal, and for producing a selector control signal Sc in accordance with the results of that judgement, for controlling a selector 117 to supply either the demodulation output from the demodulator 5 or from the demodulator 95 to the control

25 section 6, for thereby writing into the memory 9 the

response data acquired from a transponder, as described for the control section 6 of the first embodiment.

The position relationships between the interrogator apparatus 100 and transponders 20 of this embodiment will be assumed to be as shown in Fig. 2, with the transponders 20 being attached to respective ones of the load items 31, and the interrogator apparatus 100 acquiring response data 61 from each of the transponders 20 which are within the single communication region 30.

The operation timings for this embodiment, determined by the operation of the control section 6, are as shown in Fig. 4 described above, other than in that each of the intervals of transmitting CW radio waves 63 and 64 by the antennas 2 and 10 become intervals in which unmodulated spread-spectrum radio waves are transmitted, with respectively different types of spread-spectrum radio waves (i.e., generated by using respectively different pseudo-noise code sequences) being transmitted from the antennas 2 and 10, and in that the modulator sections 7 and 97 each perform the same modulation operation as that of the modulator 7 of the first embodiment, with each modulator section operating on the fixed frequency high-frequency signal that is produced from the

oscillator 8, i.e., with the control section 6 inhibiting the operation of the first and second spectrum spreading sections 13, 14 during each interval in which the Response Start command code is being transmitted.

Alternatively, if the receiving and demodulator section 25 of each transponder is based on a simple microwave detector circuit having broad-band reception characteristics, it would be possible to configure the interrogator apparatus such that the modulator sections 7, 97 of the interrogator apparatus perform amplitude modulation of the respective spread-spectrum signals generated by the first and second spreading sections 13, 14, for transmitting the Response Start command code.

Since the first and second spread-spectrum sections 13, 14 utilize respectively different pseudo-random code sequences to effect spectrum spreading, the spread-spectrum radio waves transmitted from the antennas 2 and 10 are of respectively different types. This enables the resultant two types of spread-spectrum reflected radio waves which are returned to the interrogator apparatus to be mutually separately received and processed by the interrogator apparatus 100. That is to say, the first spreading section 13

supplies a local oscillator signal to the mixer 115 which varies in the appropriate sequence (i.e., the pseudo-noise code sequence used by the first spreading section 13 in generating the spread-spectrum radio waves) for demodulating the modulated spread-spectrum radio waves which were transmitted from the first antenna 2, while similarly the second mixer 115 receives a local oscillator signal which varies in the appropriate sequence for demodulating the modulated spread-spectrum radio waves which were transmitted from the second antenna 10.

In the same way as described for the first embodiment, each transponder 20 has a memory 23 with information stored therein, and performs modulated reflection of the spread-spectrum CW radio waves which are received from the interrogator apparatus 100, to thereby convey the stored information to the interrogator apparatus 100.

Methods of generating spread-spectrum radio waves are well known, so that detailed description of the operation and internal configuration of the first and second spectrum spreading sections 13 and 14 will be omitted.

It can thus be understood that with this embodiment, the reflected radio waves conveying the

response data 61 from a transponder 20 are received by the first antenna 2 or the second antenna 10 of the interrogator apparatus 100, subjected to inverse spectrum spreading by the action of the first spreading section 13 or second spreading section 14 operating on the first and second mixers 15, 115 respectively (i.e., by using the same pseudo-noise code sequence as that used to generate the transmitted spread-spectrum radio waves which resulted in these received reflected radio waves) after transfer through the receiving section 4 or 94, and the resultant signal is demodulated by the demodulator 5 or 95, to thereby obtain the information stored in the memory 23 of the transponder 20.

During such a receiving operation, since the mixers 15 and 115 perform inverse spectrum spreading of signals which have been generated using specific pseudo-noise code sequences, the demodulator 5 will not demodulate radio waves reflected from a transponder which has received these radio waves from the second antenna 10, and similarly the demodulator 95 will not demodulate modulated radio waves that are reflected from a transponder which has received these radio waves from the first antenna 2.

As described hereinabove, with each of the transponders 20 being attached to a load item such as a

piece of baggage, the orientations of each antenna 24 of those transponders which are within the communication region 30 will vary in a random manner. Thus with the first embodiment of the invention the strength of the received reflected signal that is received by the first antenna 2 of the interrogator apparatus 100 may vary substantially, as a result of these different orientations of the antennas of the transponders 20 in relation to that antenna 2. However with the third embodiment of the invention, it is probable that a high level of reflected signal strength will be received either by the second antenna 10 or by the first antenna 2 of the interrogator apparatus 100 from each of the transponders 20 that are within the communication region 30. Hence, more reliable communication between the interrogator apparatus and transponders can be achieved.

With this embodiment, the comparator 116 of the interrogator apparatus 100 compares the respective levels of signal strength of the output signals obtained from the demodulators 5 and 95, and selects the one of these two signals having the higher level, to be supplied to the control section 6, for thereby writing the data held in the memory 23 of a transponder 20 into the memory 9 of the interrogator apparatus 100.

As an alternative form of the third embodiment, the operation of the comparator 116 and selector 117 can be modified from that described above, such that normally the signal obtained from a specific one of the receiving signal paths from the antenna 2 and antenna 10 respectively will always be selected, to obtain the information transmitted from transponders 20, but that the selector 117 will select the other one of these signal receiving paths in the event that signal drop-out occurs in the normally selected path.

This embodiment avoids a problem which may occur when using reflected modulated CW radio waves transmitted from two separately located antennas for transferring information from each transponder to the interrogator apparatus. That is to say, due to the first antenna 2 and the second antenna 10 having the same communication region 30, standing waves could be produced within the communication region. The extent of this problem depends upon such factors as the relationship between the respective frequencies of the signals generated by the oscillators 8, 12 of the interrogator apparatus shown in Fig. 1, the distance between the antennas 2, 10 and the stream of transponders, and the size of the communication region 30. This can result in periodic occurrence of a very

low level of signal strength being received by a the
interrogator apparatus from a transponder, as the
transponder moves with respect to the antennas of the
interrogator apparatus. This phenomenon places
5 restrictions on the size of the region for which
reliable communication between the interrogator
apparatus 1 and the transponders 20 is possible.
However with the third embodiment described above, the
radio waves which are transmitted from the first
10 antenna 2 and from the second antenna 10 respectively
are spectrum-spread by using respectively different
pseudo-noise code sequences, so that the spatial
distribution of standing waves within the communication
region 30 will vary with time, thereby reducing the
15 effect of such standing waves on the operation of these
two antennas. Hence, in spite of the fact that the
position and orientation of each transponder 20 is not
fixed with respect to the first antenna 2 or the second
antenna 10, the interrogator apparatus 100 of the
20 mobile body discrimination apparatus can reliably
obtain response information from each of the
transponders 20 which enter the communication region
30.

The data flows between the interrogator apparatus
25 and a transponder which is within the communication

region 30, with this embodiment, are conceptually illustrated in Fig. 7.

In the above explanation, it is assumed that each transponder 20 is configured to internally derive power for driving its electronic circuits by rectifying the received signal obtained from the radio waves which are transmitted by the interrogator apparatus 100. However it would be equally possible to apply the principles of the embodiment described above to a system in which the circuits of each transponder 20 are powered by a battery which is mounted on the transponder.

Also, although in the above description the respective levels of received signal strength for the signal paths of the antennas 2 and 4 respectively are judged on the basis of the output signals from the demodulator sections 5 and 95 respectively, the invention is not limited to such an arrangement, and it may be preferable to extract a signal from some other point in the receiving signal path, for use in making that judgement.

4th Embodiment

A fourth embodiment of the invention will be described in the following. The internal configurations of an interrogator apparatus and respective transponders of this embodiment will be

assumed to be identical to those of the third embodiment, shown in Fig. 8 and described hereinabove, with respectively independent signal paths being used for the two antennas 2 and 10. Fig. 9 is a diagram showing the general position relationships between transponders 20 and communication regions which are respectively formed by the first antenna 2 and second antenna 10 of the interrogator apparatus 200 of the fourth embodiment. In Fig. 9, 33 denotes a first communication region which is that of the first antenna 2 of the interrogator apparatus 200, and 34 denotes a second communication region which is that of the second antenna 10 of the interrogator apparatus 200. As shown in Fig. 9, the first communication region 33 and second communication region 34 are formed such as to partially overlap one another, and are disposed symmetrically on the left and right sides of the central axis of the conveyer belt 32, i.e., on the left and right sides of the stream of moving load items 31, so that approximately half of the load items 31 will pass through the first communication region 33 and the remaining half will pass through the second communication region 34. The interrogator apparatus 200 obtains the information stored beforehand in a

transponder 20, through the operation described hereinabove for the third embodiment.

Each transponder 20, attached to a load item 31, is transported by the conveyer belt 32 such as to pass through either the conveyer belt 32 or the second communication region 34, and thereby generates electrical power from the unmodulated spread-spectrum radio waves which are transmitted from the first antenna 2 and the second antenna 10 of the interrogator apparatus 200. The modulator section 22 of the transponder 20 then performs modulation based on the information which has been stored beforehand in the memory 23, whereby the information is transferred as a reflected modulated radio signal to the interrogator apparatus 200, as described for the preceding embodiments.

With this embodiment, the first communication region 33 and second communication region 34, formed by the first antenna 2 and the second antenna 10 respectively, are spatially displaced from one another. As a result, the interrogator apparatus 200 can receive the reflected response data 61 from various transponders 20 by either the first antenna 2 or the second antenna 10, i.e., response data can be acquired simultaneously from two different transponders via the

signal channels of the antennas 2 and 10 respectively. Thus with this embodiment, it is possible for the interrogator apparatus 200 to acquire information from rapidly from the transponders than is possible with the third embodiment.

Fig. 10 is a general block diagram of the interrogator apparatus 200 of this embodiment. This differs from that of the third embodiment shown in Fig. 8 in that the comparator 116 and selector 117 are omitted, and also in that a control section 106 is incorporated which, in addition to the functions of the control section 6 of the first embodiment, transfers respective sets of response data that are received via the first and second antennas 2, 10 simultaneously by two different transponders to the memory 9, such as to be stored in respectively different memory locations.

Fig. 16 conceptually illustrates the flow of data between the interrogator apparatus and two transponders which are respectively located in the communication regions 33 and 34, with this embodiment.

As can be understood from Fig. 9, it is necessary to provide a sufficient degree of overlap between the two communication regions 33, 34. As a result, the same set of response data may be obtained from a transponder via the signal paths of the antennas 2 and

10 of the interrogator apparatus 200 concurrently.
However this will simply result in that response data
set being stored in duplicate in the memory 9, and the
apparatus could be readily configured to prevent such
duplication.

5th Embodiment

A fifth embodiment of the invention will be
described in the following. The internal configuration
and operation of the interrogator apparatus of this
embodiment is basically similar to that of the third
embodiment shown in Fig. 8. However the position
relationships between the communication regions 33 and
34 of the first antenna 2 and second antenna 10 of the
interrogator apparatus 101, with this fifth embodiment,
are as described for the second embodiment and shown in
Fig. 5, with the communication region 34 positioned
upstream from the communication region 33 with respect
to the direction of flow of the load items 31, and with
the regions 33, 34 positioned partially overlapping one
another. Furthermore with this embodiment when a
transponder reads out from the memory 23 a set of
response data in response to receiving a Response Start
command code from the interrogator apparatus, it also
reads out an ID (identification) code which is specific
to that transponder, and transmits the ID code and

response data set together. In addition, the operation of the control section 106 of the interrogator apparatus of the fifth embodiment differs from that of the third embodiment in that, when the response data 61 transmitted from a transponder are successfully received by the interrogator apparatus 101 via the signal path of antenna 2 or the signal path of antenna 10, without the reception being adversely affected by signals arriving from a plurality of transponders concurrently, the control section 106 reads out from the memory 9 a code for a "Transmission Halt" command which has been stored therein beforehand, and supplies that code together with the ID code of the transponder from which the response data have been successfully received, to the modulator section (7 or 97) of the antenna (2 or 10) from which the response data were received. With this embodiment, each of the transponders is configured such that when this Transmission Halt command code is received together with the ID code of that transponder, the transponder is then set in a condition whereby no further transmissions of the response data 61 will be performed until a predetermined time interval has elapsed.

Specifically, as shown in Fig. 11, the internal configuration of each of the transponders 120 of this

embodiment differs from the transponder 20 of the preceding embodiments by further including a Transmission Halt command code detection section 190 which receives the output signals from the demodulator section 25. Furthermore, a response timing control section 126 of the transponder 120 functions in a similar manner to that of the response timing control section 26 of the first embodiment, but the operation of the response timing control section 126 is inhibited for a predetermined time interval by an inhibit signal that is produced from the Transmission Halt command code detection section 190 when the Transmission Halt command code is received together with the transponder ID code. The action of that inhibit signal continues until a predetermined time interval has elapsed, with that time interval being predetermined as being at least sufficiently long for the transponder to have completely traversed both of the communication regions 34 and 32 in succession.

Fig. 12 is a diagram showing the timings of exchange of information between the first antenna 2 or the second antenna 10 of the interrogator apparatus 101 and a transponder 120 with this embodiment. The internal configuration of the interrogator apparatus of this embodiment is as shown in Fig. 8, but with the

operation of the control section 106 differing from that of the third embodiment by further including the aforementioned function of controlling transmission of the Transmission Halt command code with a transponder ID code attached.

Fig. 13 is a basic flow diagram of the operation of the controller 106 of this embodiment with respect to generating the Response Start and Transmission Halt command codes. For simplicity of description only the operations necessary for transmitting the Transmission Halt command code from the first antenna 2 are shown, i.e., performed when the controller 6 detects that response data have been successfully acquired from a transponder via the first antenna 2. The modulator 97 is similarly controlled to generate the Transmission Halt command code from the second antenna 10, when response data have been successfully acquired by reception via that antenna.

With a mobile body discrimination system according to this embodiment, if the response data which are stored in the memory 23 of a transponder 120, attached to one of the load items 31, are received by the second antenna 10 of the interrogator apparatus 101 while the transponder 120 is within the second communication region 34 shown in Fig. 5, and if the control section

of the interrogator apparatus judges that the acquired response data do not overlap with signals received from any other transponders, the interrogator apparatus then transmits via antenna 10 the Transmission Halt command code 66 together with the ID code of that transponder 120. Thereafter, the transponder from which these response data were acquired will not transmit any further (unnecessary) response data while passing through the communication regions 33 and 34 of the interrogator apparatus.

With the present invention, although a plurality of transponders which are each currently within the communication region of an antenna of an interrogator apparatus will transmit their respective sets of response data at randomly determined points in time, there are only a limited number of time slots available in which to provide such random variation. That is to say, there must be a limit on the maximum value of the randomly determined delay interval 62, in order to ensure that every transponder will transmit a response signal before moving out of the communication region. Thus, if a large number of transponder are moving through the communication region together, there is a possibility that response data sets will be transmitted concurrently by two or more transponders in response to

a transmission of the Response Start command code from the interrogator apparatus. Thus with the first embodiment, the rate at which transponders move through the communication region 30 must be limited such that the possibility of such concurrent responses from plural transponders is made sufficiently small. Alternatively stated, in the case of the first or second embodiments, in which response data are successively acquired via a single receiving system from a single communication region, the time required for reliably acquiring data from each of a plurality of transponders which are moving through the communication region together will increase linearly in proportion to the number of these transponders.

However with this fifth embodiment, in which the communication regions 33, 34 of the first antenna 2 and second antenna 10 of the interrogator apparatus 101 are arranged spatially separated, with the communication region 34 located upstream from the communication region 33 with respect to the direction of flow of the transponders, response data will be acquired by the interrogator apparatus 101 from a certain proportion of the transponders 120 while the transponders are passing through the communication region 34. When this occurs, the transponders from which data have been acquired

will receive the Transmission Halt command code and so will not transmit any subsequent response data signals. Hence, when the transponders then pass through the communication region 33, the effect is as if those transponders which have already transmitted response data in the communication region 34 have been removed. Thus in effect, communication will be performed between the first antenna 2 of the interrogator apparatus 101 and a smaller number of transponders 120 which are within the communication region 33.

Hence this embodiment enables a higher rate of flow of the load items 31, or enables the system to cope with occasional occurrence of a high density of load items on the conveyer belt 32, while maintaining sufficient reliability of data acquisition from all of the transponders.

6th Embodiment

Fig. 14 shows the internal configuration of an interrogator apparatus 300 of a sixth embodiment of the invention. With this embodiment, in the same way as for the system configuration of the second embodiment shown in Fig. 5, two communication regions 33 and 34 are utilized, positioned spaced apart but partially overlapping one another and located respectively downstream and upstream with respect to the flow of

load items 31. The contents and operation of Fig. 14 are similar to those of the interrogator apparatus 100 of the third embodiment shown in Fig. 8, but the overall system differs from that of the third
5 embodiment in that photoelectric sensors 50 are provided before the upstream communication region 34 that is formed by the second antenna 10 of the interrogator apparatus 1, while the interrogator apparatus 1 further includes an estimation section 51
10 which estimates the rate at which transponders 20 which are currently moving into the communication regions 33, 34, by using the outputs from the photoelectric sensors 50, and also includes a power source control section 52 which is coupled to signal lines (C) to control on/off
15 switching of power to the transmitting and receiving sections which are coupled the second antenna 10, in accordance with the estimated value that is supplied from the estimation section 51.

Fig. 15 shows the general position relationships
20 between the first antenna 2 and second antenna 10 of the interrogator apparatus 1, the communication regions 33 and 34 of the antennas 2 and 10 respectively, the photoelectric sensors 50, and the transponders 20. Various techniques for utilizing photoelectric sensors
25 to detect the passage of objects are well known, e.g.,

based on variations in level of reflected light that is incident on a sensor, or interruptions of a light beam that is incident on a sensor, so that detailed description will be omitted.

5 The operation of this embodiment is as follows.
The estimation section 51 uses output signals obtained from the photoelectric sensors 50, which are positioned upstream from the second communication region 34 in relation to the direction of flow of the load items 31,
10 to estimate the rate at which load items which are being transported by the conveyer belt 32, i.e., the number of load items which move past the photoelectric sensors 50 in each of respective unit time intervals. If the estimation section 51 estimates that the number
15 of transponders 20 which pass within the unit time interval is less than a predetermined value (i.e., judges that all of the response data sets 61 from a plurality of transponders 20 which will be concurrently within the first communication region 33 can be
20 acquired successfully by the operation of the transmitting/receiving system which is coupled to the first antenna 2) then a control signal produced from the estimation section 51 causes the power source control section 52 to set the signal lines (C) such as
25 to switch off the supply of power to the transmitting

and receiving sections which are coupled to the second antenna 10. Conversely, if it is found that the number of transponders 20 which pass the photoelectric sensors 50 within the predetermined time interval is greater than the aforementioned predetermined value, then a control signal is generated by the estimation section 51 whereby the power source control section 52 causes power to be supplied to aforementioned transmitting and receiving sections, i.e., the receiving section 94, mixer 115 and demodulator section 95 of the receiving path of the second antenna 10, and the modulator 97 and spreading section 14 of the transmission path of the antenna 10.

Thus with this embodiment, the rate at which transponders 20 are being transported by the conveyer belt 32 is judged, and depending upon the judgement result, control is executed to switch on or off the supply of power for operating the transmitting and receiving sections of the interrogator apparatus relating to the second antenna 10. In that way, a mobile body discrimination apparatus can be realized which has a lower level of power consumption for the interrogator apparatus.

The arrangement of data flows between the interrogator apparatus and transponders with this

embodiment is as illustrated in the conceptual diagram of Fig. 16, when power is being supplied to the transmitting/receiving sections connected to the second antenna 10.

5 7th Embodiment

Fig. 18 shows the general configuration of the interrogator apparatus 400 of a seventh embodiment of the invention. In the overall system, the position relationships between the antennas 2 and 10, a common communication region 30 formed by the overlapping communication regions of these antennas, and the flow of load items 31 having respective transponders 20 attached thereto, are as described for the first embodiment and shown in Fig. 3. As shown in Fig. 18, the interrogator apparatus of this embodiment differs from that of the third embodiment shown in Fig. 8 in that a timing control section 16 is included, which controls the transmission of radio waves from the antennas 2 and 10. In this embodiment it is assumed that this control is performed by applying respective control signals from the timing control section 16 to the first spreading section 13 and the second spreading section 14, however other arrangements for selectively enabling/inhibiting transmission of radio waves from the antennas could be envisaged.

10
15
20
25

Fig. 17 conceptually illustrates the flow of data between the interrogator apparatus of this embodiment and a transponder which is located within the communication region 30, for the case in which the timing control section 16 is enabling communication to be executed only via the first antenna 2, and for the case in which communication is enabled only via the second antenna 10.

The operation of the seventh embodiment is as follows. In the same way as described for the third embodiment, modulated reflected spread-spectrum radio waves of respectively different types are received via the antennas 2 and 10 respectively, and inverse spectrum spreading is applied by the mixer sections 15 and 115. so that the demodulator sections 9, 5 obtain sets of response data from transponders. However with this embodiment, transmissions are performed alternately from the first antenna 2 and the second antenna 10 in successive time intervals. That is to say, a sequence is repetitively executed whereby transmission of radio waves from the second antenna 10 is inhibited while the unmodulated spread-spectrum radio waves and the Response Start command code are alternately transmitted from the first antenna 2 (as shown in Fig. 4) during a fixed interval, while in the

succeeding fixed interval the transmission of radio waves from the first antenna 2 is inhibited while the unmodulated spread-spectrum radio waves and the Response Start command code 60 are being transmitted by the second antenna 10.

As a result, at any particular point in time, any transponder 20 which is within the communication region 30 will either receive only the spread-spectrum CW radio waves 63 and Response Start command code 60 from the first antenna 2, or only the spread-spectrum CW waves 64 and Response Start command code 60 from the second antenna 10 respectively.

The advantage of this is as follows. In the case of the third embodiment, a transponder which is within the communication region 30, i.e. a communication region which is common to both the antennas 2 and 20, will receive radio waves simultaneously from both of these antennas. These will tend to block one another, with respect to reception by the transponder, so that a transponder may be hindered from correctly receiving the Response Start command code 60, or the reflected signals from a transponder may be adversely affected by such concurrent reception of two different types of spread-spectrum radio waves, so that the interrogator apparatus may not receive the response data accurately

from the transponders. However with this seventh embodiment, while receiving and demodulation are being applied by a transponder to a Response Start command code received from the first antenna 2 or the second antenna 10 of the interrogator apparatus 1, there will be no adverse effect resulting from reception of spread-spectrum radio waves that are being transmitted by the other one of these antennas. Hence, the response data from each of the transponders 20 which traverse the communication region 30 can be acquired by the interrogator apparatus 1 with a high degree of reliability, free from errors.

8th Embodiment

Fig. 19 is a diagram showing the internal configuration of an interrogator apparatus 500 of an eighth embodiment of the invention. The contents of Fig. 21 differ from those of the interrogator apparatus of the seventh embodiment shown in Fig. 18 and described above, in that the first and second antennas of the interrogator apparatus are respective polarizing antennas 17, 18 which apply respectively different types of polarization of the radio waves which they transmit. It will be assumed in the following that these are two opposite directions of circular polarization, e.g., with an antenna 17 which transmits

radio waves polarized in the right-handed direction of rotation, and an antenna 18 which transmits radio waves polarized in the left-handed direction of rotation. The position relationships between the antennas 17, 18 of the interrogator apparatus 500 and the transponders 20 with this embodiment are as shown in Fig. 20, with a single communication region 30 being common to both of the antennas 17 and 18, formed by the overlapping communication regions of these two antennas.

This embodiment further differs from the seventh embodiment in that each of the transponders of this embodiment is provided with a polarizing antenna to constitute the antenna 24 shown in Fig. 1, i.e., either an antenna which will provide more efficient reception and modulated reflection of incident circular polarization radio waves that are of the right-handed direction, or an antenna which will provide more efficient reception and modulated reflection of left-handed polarization radio waves. In addition it is arranged that, on average, approximately half of the respective antennas 124 of the transponders 220 that are attached to the load items 31 and thereby moved by the conveyer belt 32 are of the first of these two different circular polarization types, and the remaining half of the transponders have respective

antennas that are of the second type of circular polarization.

Fig. 22 conceptually illustrates the flow of data between the interrogator apparatus of this embodiment and two transponders 20a, 20b which have a right-handed polarization antenna and a left-handed polarization antenna respectively, and are located in the communication region 30.

The operation of this eighth embodiment is as follows. As described for the seventh embodiment, spread-spectrum radio waves 63 and 64 are generated using respectively different pseudo-noise code sequences and are transmitted from the right-handed polarization antenna 17 and left-handed polarization antenna 18 respectively. The transponders respond selectively to the transmissions from the interrogator apparatus 500, with each transponder sending a response only to a Response Start command code that is conveyed by radio waves transmitted from antenna 17, or only to a Response Start command code transmitted from the antenna 18, in accordance with the type of polarization of the antenna of the transponder. As a result, each of the right-handed polarization antenna 17 and the left-handed polarization antenna 18 of the interrogator apparatus 500 will reliably obtain response data 61

from approximately half of a plurality of transponders 20 which are moving through the communication region 30 at the same time.

Thus with this embodiment, by providing a right-
5 handed direction circular polarization antenna 17 and a
left-handed direction circular polarization antenna 18
and arranging that, on average, approximately half of a
plurality of transponders 20 which are passing through
the communication region 30 simultaneously can receive
10 signals transmitted by only one of these antennas and
the remaining half can receive signals transmitted only
by the other one of these antennas, even greater
advantages than those described for the seventh
embodiment can be obtained with regard to reliable
15 acquisition of data from a plurality of transponders
which are passing through the communication region 30.

With this embodiment, it would be possible to
position the right-handed polarization antenna 17 and
left-handed polarization antenna 18 at approximately
20 the same location, for example on one side of the
conveyer belt 32, to form the communication region 30.

As a further alternative, a plurality of
interrogator apparatuses could be utilized, to provide
a plurality of communication regions 30, respectively
25 positioned such as the two communication regions 33, 34

in the diagram of Fig. 4, i.e., successively arranged along the direction of motion of the conveyor belt 32. In that case, assuming that two such communication regions are formed by a pair of interrogator apparatuses in that way, the information from a transponder which is not acquired by a first interrogator apparatus when that transponder passes through the upstream communication region could be acquired by the other interrogator apparatus when the transponder passes through the downstream communication region.

9th Embodiment

Fig. 21 is a general block diagram of the interrogator apparatus 600 of a ninth embodiment of the invention. This embodiment differs from the eighth embodiment described above only in that the interrogator apparatus 600 includes a timing control section 16, as for the interrogator apparatus 400 of the seventh embodiment shown in Fig. 18, for alternately switching the operation of the interrogator apparatus between a condition of enabling transmission of radio waves from the first polarizing antenna 17 of the interrogator apparatus while inhibiting transmission of radio waves from the second polarizing antenna 18, and a condition of enabling transmission of

radio waves from the second polarizing antenna 18 while inhibiting transmission of radio waves from the first polarizing antenna 17. Hence, while a transponder of this embodiment is receiving radio waves which are

5 polarized in the appropriate direction for the antenna of that transponder, it will not be subjected to incident radio waves of the other direction of polarization, so that the reception sensitivity of the transponder will not be adversely affected.

10 10th Embodiment

Fig. 24 is a system block diagram showing the general configuration of a transponder 120 of a tenth embodiment of the invention. This transponder is for use in conjunction with an interrogator apparatus which

15 transmits polarized radio waves having respectively different types of polarization from the first and second antennas, as with the eighth embodiment described above, but whereby the interrogator apparatus can thereby obtain two different sets of response data

20 (one of which might for example be identification data) concurrently from a transponder. In Fig. 24, numeral 40 denotes a first polarizing antenna, 41 denotes a second polarizing antenna, 42 denotes a first rectifier circuit which is connected to the first antenna 40 and

25 produces a DC power supply designated in Fig. 24 as

Vp1, 43 denotes a first modulator section which is connected to the first antenna 40, 44 denotes a first memory which is connected to the first modulator section 43, 91 denotes a first receiving and demodulator section which is connected to the first antenna 40, 190 denotes a response timing control section which controls the operation of the first memory 44 and first modulator section 43, 45 denotes a second rectifier circuit which is connected to the second antenna 41 and produces a DC power supply which is designated as Vp2 in Fig. 24, 46 denotes a second modulator section which is connected to the second antenna 41, 47 denotes a second memory which is connected to the second modulator section 46, with the second modulator section and second memory also being controlled by the response timing control section 190, and 95 denotes a second receiving and demodulator section which is connected to the second antenna 41. The antenna configuration of the transponder 120 is determined in accordance with the polarization method that is used by the interrogator apparatus. The antenna configurations of the interrogator apparatus are as described for the eighth embodiment described above, so that one of the antennas 40, 41 of the transponder 120 is of right-handed circular polarization type, and the

other antenna is of left-handed circular polarization type.

The interrogator apparatus of this embodiment is substantially identical to that of the eighth
5 embodiment shown in Fig. 19. When two sets of data, conveyed by modulated reflected right-handed circular polarization radio waves and left-handed circular polarization radio waves respectively, are concurrently (or substantially concurrently) received and
10 demodulated by the receiving systems of the first and second antennas 17, 18 respectively (e.g., an identification code and a response data set transmitted from one of the transponders), the control section 6 writes both of these sets of data into the memory 9,
15 for example into adjacent memory addresses.

Fig. 23 conceptually illustrates the flow of data between the interrogator apparatus of this embodiment and a transponder which has a right-handed polarization antenna 40 and a left-handed polarization antenna 41,
20 and is located in the communication region 30, with the diagram illustrating how two different sets of response data, designated as Da and Db respectively, can be concurrently acquired by the interrogator apparatus from a transponder.

The operation of the transponder of this embodiment is as follows. It will be assumed in the following that the DC supply power which is produced by the first rectifier circuit 42 is used to operate each of the circuits which are coupled directly or indirectly to the first antenna 40, while the output from the second rectifier circuit 45 is similarly used to power the remaining circuits, i.e., those associated with the second antenna 41. However since the transponder is to be used under a condition in which spread-spectrum radio waves are being received concurrently by both of the antennas 40, 41, other arrangements for distributing the power produced by the rectifier circuits 42, 45 could be adopted. When the first antenna 40 of a transponder receives the (spread-spectrum) right hand circular polarization radio waves from the interrogator apparatus 1 the first rectifier circuit 42 rectifies these to obtain power to operate circuits of the transponder. The first modulator section 43 applies modulation in accordance with the data which have been stored beforehand in the first memory 44, which are read out under the control of the response timing control section, at a time (following reception of the Response Start command code from the interrogator apparatus) which is randomly determined,

i.e., the configuration and operation of the response timing control section 190 is similar to that described for the response timing control section 26 of the first embodiment shown in Fig. 1, other than that the response timing control section 190 responds to reception of the Response Start command code by either or both of the receiving and demodulator sections 91, 93 to randomly determine a time point to commence transmission of data from the antennas 40, 41. As described for the preceding embodiments, the modulation which is applied by the transponder may for example be amplitude or phase modulation.

When the second antenna 41 of the transponder 120 receives the left hand circular polarization radio waves from the interrogator apparatus 1, the second rectifier circuit 45 rectifies these to obtain power to operate circuits of the transponder, and (at each of the above-mentioned randomly determined time points) the second modulator section 46 applies modulation in accordance with the data which have been stored beforehand in the second memory 47, to thereby reflect the spread-spectrum radio waves from the interrogator apparatus 1 such as to transmit to the interrogator apparatus 1 a signal conveying the data held in the second memory 47.

The degree of polarization discrimination provided by the second antenna 41 is such that the right hand circular polarization radio waves from the interrogator apparatus 1 will not be received by the second antenna 41, and conversely, the left hand circular polarization radio waves from the interrogator apparatus 1 will not be received by the first antenna 40.

Thus with this embodiment, communication can be performed between the interrogator apparatus 1 and a transponder 120 using radio waves having two different types of polarization simultaneously, thereby enabling the transponder 120 to transmit two separate set of data concurrently to the interrogator apparatus 1. For example, it becomes possible for a transponder 120 to transmit an ID code via the first antenna 40, and data relating to an object via the second antenna 41. In that way, the requisite data can be rapidly acquired from each of the transponders 20 by the interrogator apparatus 1. That is to say, transponders 20 which have moved into the communication region 30 become illuminated with two different types of (spread-spectrum) polarized radio waves, and each transponder 120 performs respectively different operations in response to reception of these two different types of

radio waves, such as transmitting two different types of information simultaneously to the interrogator apparatus 1. As a result, a mobile body discrimination apparatus can be realized whereby information can be rapidly acquired from a plurality of transponders 20 which are currently within the communication region 30.

Furthermore, each transponder 120 can obtain electrical power for operating its internal circuits from both the first antenna 40 and the second antenna 41, so that greater stability can be obtained for that supply of power irrespective of the position and orientation of the transponder within a communication region of the interrogator apparatus.

11th Embodiment

Fig. 25 is a diagram showing the general configuration of a transponder 220 of an eleventh embodiment of the invention. In Fig. 25, numeral 40 denotes a first antenna, 42 denotes a first rectifier circuit which is connected to the first antenna 40, 25 denotes a detection/demodulator section which is connected to the first antenna 40, 41 denotes a second antenna, 45 denotes a second rectifier circuit which is connected to the second antenna 41, 22 denotes a modulator section which is connected to the second antenna 41, 23 denotes a memory which is connected to

the modulator section 22, 49 denotes a response timing control section which is connected to the detection and demodulator section 25 and the memory 23. This transponder can be configured such that for example the first antenna 40 is a polarizing antenna having the right-handed circular direction of polarization, the second antenna 41 is a polarizing antenna of the left-handed direction of circular polarization, so that each of these antennas receive only polarized radio waves from the interrogator apparatus 700 which are of the same direction of circular polarization as that antenna.

The overall system configuration can be identical to that shown in Fig. 20, with a single communication region 30 being common to both of the antennas 17 and 18 of the interrogator apparatus.

Fig. 26 is a general block diagram of the interrogator apparatus 700 of this embodiment. This is basically similar to that of the eighth embodiment, however since the first antenna 17 is used only to transmit polarized spread-spectrum radio waves, which will be assumed to be of the same polarization type as the first antenna 40 of the transponder 220, no receiving sections are provided for that antenna, while since the second antenna 18 is of the same polarization

type as the second antenna 41 of the transponder 220,
it is not required to transmit modulated radio waves,
but only to transmit unmodulated spread-spectrum
polarized radio waves and receive reflected modulated
radio waves, so that no modulator section need be
provided for that antenna. Furthermore, in addition
to the Response Start command code, the memory 9 of the
interrogator apparatus of this embodiment also has
stored therein arbitrarily determined data which are to
be transmitted to each of the transponders or (when
accompanied by an identification code) to specific ones
of the transponders. The control section 6 may itself
include a data I/O section and display device, etc.,
for inputting such arbitrarily determined data to the
memory 9, or may be coupled to an external data
processing apparatus which provides such a function.

Fig. 27 conceptually illustrates the flow of data
between the interrogator apparatus of this embodiment
and a transponder which has a right-handed polarization
antenna 40 and a left-handed polarization antenna 41,
and is located in the communication region 30, with the
diagram illustrating how the interrogator apparatus can
utilize the first and second antennas 17, 18 to send
data to the transponder concurrently with acquiring
data from the transponder.

The operation of this embodiment is as follows.

When the second antenna 41 of a transponder 220 receives the left-handed circular polarization radio waves from the second antenna 18 of the interrogator apparatus 700, the second rectifier circuit 45

5 rectifies these to obtain power to operate the circuits of the transponder, and in addition the modulator section 22 applies modulation in accordance with data which have been stored beforehand in the memory 23, to

10 the CW radio waves transmitted from the interrogator apparatus 700, to thereby generate reflected radio waves for transmitting the information stored at the transponder 220 to the interrogator apparatus 700.

The first antenna 40 of the transponder 220, on

15 the other hand, receives the right-handed direction circular polarization radio waves from the interrogator apparatus, and the first rectifier circuit 42 rectifies these to obtain power to operate the circuits of the transponder. Signals conveyed by modulated radio

20 waves that are received by the first antenna 40 are demodulated by the receiving and demodulator section 25. These signals convey the Response Start command code, which is utilized by the control section 149 in the same manner as for the response timing control

25 section 26 of the first embodiment, and also convey the

5 aforementioned arbitrarily determined data (i.e.,
transmitted in the intervals between successive
occurrences of the Response Start command code) which
may be directed to a specific transponder or to all of
the transponders. Such data are supplied from
receiving and demodulator section 25 to the control
section 149, to be written into the memory 23.

10 If for example such transmitted data includes a
transponder identifier code, then the control section
149 can be configured to include a function for
recognition of that code, to enable only data intended
for that specific transponder to be extracted from the
data which are transmitted by the interrogator
apparatus.

15 In that way, the transponder 220 can acquire
arbitrary information from the interrogator apparatus
700. The right-handed circular polarization radio
waves from the interrogator apparatus 700 cannot be
modulated and reflected by the second antenna 41, and
20 conversely the left-handed circular polarization radio
waves from the interrogator apparatus 700 cannot be
received by the first antenna 40. Hence, each
transponder 220 can simultaneously transmit and receive
information to and from the interrogator apparatus 700,
25 by using the two different types of radio waves.

Thus with this embodiment, the transponders 20 which successively enter the communication region 30 become illuminated by radio waves of different types of polarization, and each transponder 220 performs⁵ respectively different types of operation in response to these two types of radio waves, so that it becomes possible for a transponder 220 to perform transmission and receiving using two antennas simultaneously. As a result, a mobile body discrimination system can be¹⁰ realized whereby bidirectional communication can be successively performed with each of a plurality of transponders 220 which are concurrently within the communication region 30.

12th Embodiment

¹⁵ A twelfth embodiment of the invention will be described in the following. With this embodiment, the interrogator apparatus is configured as shown in Fig. 19 for the eighth embodiment, and the overall system configuration can be as shown in Fig. 20, while each of²⁰ the transponders is configured as shown in Fig. 25. However with the twelfth embodiment, it is arranged that (on average) approximately half of the transponders which move through the communication region 30 are of a first type, which have a first²⁵ antenna 40 that is of the right-handed direction of

circular polarization and a second antenna 41 which is of the left-handed direction of circular polarization, while the other half of the transponders are of a second type, which have a first antenna 40 that is of the left-handed direction of circular polarization and a second antenna 41 which is of the right-handed direction of circular polarization.

As a result, it becomes possible for the interrogator apparatus to send data via the first antenna 17 to a transponder that is of the first type, while concurrently receiving response data from that transponder via the second antenna 18, while at the same time sending data via the second antenna 18 to a transponder that is of the second type, while concurrently receiving response data from that transponder via the first antenna 17.

Fig. 28 conceptually illustrates the flow of data between the interrogator apparatus of this embodiment and a first transponder 220a which has the first antenna 40 thereof as a right-handed polarization antenna and the second antenna 41 thereof as a left-handed polarization antenna, and a second transponder 220b which has the first antenna 40 thereof as a left-handed polarization antenna 40 and the second antenna 41 thereof as a right-handed polarization antenna,

with both transponders being located in the communication region 30

Thus with this embodiment, a greater number of transponder can pass through the communication region 30 in each unit time interval while ensuring reliable two-way communication with each of these transponders, by comparison with the preceding embodiment.

13th Embodiment

Fig. 29 is a general block diagram of the configuration of each transponder 320 of a thirteenth embodiment of the invention. In Fig. 29, numeral 40 denotes a first polarizing antenna, 41 denotes a second polarizing antenna, 42 denotes a first rectifier circuit which is connected to the first antenna 40, 43 denotes a first modulator section which is connected to the first antenna 40, 44 denotes a first memory which is connected to the first modulator section 43, 194 denotes a response timing control circuit, 45 denotes a second rectifier circuit which is connected to the second antenna 41, 46 denotes a second modulator section which is connected to the second antenna 41, 48 denotes a power comparison section which monitors the respective supply voltage levels produced by the first rectifier circuit 42 and to the second rectifier circuit 45 and which selectively applies operation

inhibit signals through the lines 48a, 48b respectively to the first modulator section 43 and second modulator section 46. 23 denotes a memory which is connected to supply data (read out under the control of the response timing control section 194) to the first modulator section 43 and the second modulator section 46, to be transmitted by modulation of reflected radio waves. The antenna configuration is identical to that of the eighth embodiment shown in Fig. 19, with the first antenna 40 and second antenna 41 being respectively of right-handed and left-handed directions of circular polarization.

The configuration of the interrogator apparatus of this embodiment can be substantially identical to that of the eighth embodiment shown in Fig. 19. However with this embodiment, the interrogator apparatus acquires response data from only one transponder at a time, with the response data being transmitted from either the first antenna 40 or the second antenna 41 of the transponder. This is conceptually illustrated in Figs. 30A, 30B.

The operation of this embodiment is as follows. As described for the eighth embodiment, the interrogator apparatus 1 communicates with each of the transponders 20 by using two types of radio waves,

i.e., right-handed and left-handed direction circularly polarized radio waves. When the first antenna 40 of a transponder 20 receives the right-handed direction polarization radio waves from the interrogator

5 apparatus 1 the first rectifier circuit 42 rectifies these to obtain power to operate the electronic circuits of the transponder. In addition, the level of power that is currently available from the first rectifier circuit 42 is detected by the power
10 comparison section 48, e.g., based on the level of output DC voltage produced from that rectifier circuit when supplying operating current to circuits of the transponder. Similarly, when the second antenna 41 of the transponder 20 receives the left-handed direction
15 polarization radio waves from the interrogator apparatus 1, the second rectifier circuit 45 rectifies these to obtain power to operate circuits of the transponder, and the level of power that is currently available from the second rectifier circuit 45 is
20 detected by the power comparison section 48.

The power comparison section 48 compares the respective power levels that are available from the first rectifier circuit 42 and the second rectifier circuit 45, and enables the operation of the one of the
25 modulator sections 43, 46 which corresponds to the

higher one of these two levels of e power, while inhibiting the operation of the other one of these modulator sections. Thus, when the Response Start command code is received via one or both of the
5 antennas 40, 41, then as described for the preceding embodiments, the response timing control section 194 applies control signals whereby the response data are read out from the memory 23 and supplied to the modulator sections 43, 46, to be transmitted as
10 modulated reflected radio waves by the operation of the one of the two modulator sections 43, 46 which is currently operative. Thus, a type of polarization diversity operation is implemented by the transponders with this embodiment.

15 In that way, as the transponders 320 successively enter the communication region 30 of the interrogator apparatus and become illuminated by the differently polarized radio waves, response data sets are successively received from each of these transponders
20 320 via the type of polarized radio waves for which the higher value of power is currently being derived by the transponder. Hence, each of the transponders 320 can communicate with the interrogator apparatus by using the optimum condition of propagation of radio waves, so
25 that a mobile body discrimination apparatus can be

realized which provides a high degree of reliability of communication.

With each of the mobile body discrimination apparatus embodiments described above, it should be noted that it would be equally possible to either utilize a rectifier circuit to derive power for operating the circuits of the transponder from incident radio waves, or to use a battery mounted in the transponder to supply the circuits.

14th Embodiment

Fig. 31 shows the general configuration of a fourteenth embodiment of the invention, which is a housing for supporting antennas of an interrogator apparatus in appropriate relationship to a stream of transponders, such as the antennas 2, 10 of the interrogator apparatus of the first embodiment in relation to the transponders which are transported by the conveyer belt 32 in the system shown in Fig. 3. In Fig. 31, numerals 2 and 10 respectively denote first and second antennas of the interrogator apparatus, and 70 denotes a housing which encloses and supports the interrogator apparatus 1, the first antenna 2 and the second antenna 10. The housing 70 is configured with a central part of the housing being open to form a central aperture, to permit a stream of load items

having transponders 20 attached thereto to move through that central aperture. The housing 70 is formed of a suitable electrically conductive material which is selected to provide effective shielding against leakage of radio waves between the exterior of the housing and the central aperture.

Although it is assumed here that this housing 70 is applied to the apparatus and system of the first embodiment, it would be equally applicable to various other ones of the embodiments described above. However in the case of a method in which both a first communication region 33 and a second communication region 34 are formed at respectively different positions as in the example of Fig. 5, the first antenna 2 and second antenna 10 must be mounted within the interior of the housing 70 at locations close to these respective positions. The respective positions shown for the antennas 2, 10 in Fig. 31 are intended only for ease of understanding, and in a practical apparatus the antennas would be respectively oriented such as to form respective communication regions 33, 34 as shown in Fig. 5, or a common communication region 30 as shown in Fig. 2, in relation to the stream of transponder.

The operation of this embodiment is as follows, assuming for the purpose of description that it is applied to the mobile body discrimination system of the first embodiment. As the stream of transponders 20
5 mounted on respective load items 31 passes through the central aperture of the housing 70, radio waves which are transmitted from by the first antenna 2 and the second antenna 10 (each located within the interior of the housing 70) are incident on the transponders.

10 However these radio waves are substantially entirely prevented from leaking to the exterior of the housing 70, due to the constituent material and shape of the housing. In addition, the material and shape of the housing 70 serves to prevent extraneous radio waves
15 from falling on the antennas of the transponders which are passing through the housing. The interior surfaces of the central aperture may also be suitably shaped, and/or coated with a suitable material, to substantially prevent reflection of the microwave radio
20 waves, to thereby prevent multiple-reflection radio waves from reaching the antennas of the transponder.

As a result with this embodiment, the signals emitted from the interrogator apparatus 1 can be prevented from affecting other equipment, while the
25 effects of multiple reflection components, or noise due

to equipment located external to the housing 70 can be reduced. The reliability of communication between the interrogator apparatus and a plurality of transponders which are passing through the communication region (or regions) can thereby be substantially enhanced in a simple manner.

In the above description, the system is assumed to be configured such that the interrogator apparatus 1 is mounted within the interior of the housing 70. However it would be equally possible to have the interrogator apparatus 1 located at the exterior of the housing 70, connected to the first antenna 2 and the second antenna 10. Furthermore, although in the above description the housing 70 has a central opening formed therein, similar results could be achieved by using a housing which is configured to be open at one side thereof, for example having an inverted U-shape rather than an enclosed rectangular configuration.

In the above description, it has been assumed that scanning of a plurality of transponders by the antennas of an interrogator apparatus is performed by moving a substantially continuous stream of transponders (i.e., attached to respective articles) through the communication region (or communication regions) of the antennas of the interrogator apparatus, as illustrated

in Fig. 3. However the above embodiments of a mobile body discrimination apparatus are not limited to such a system, and it would for example be possible to move successive batches of transponders into the communication region of the interrogator apparatus antennas, with each batch moving continuously through the communication region or being momentarily halted while within the communication region.

For example as illustrated in the diagram of Fig. 32, each of successive batches of transponders 20 attached to respective load items such as pieces of baggage, etc., might be transported by respective wheeled carts 140 (which could be manually or automatically controlled) along a fixed path extending in the direction indicated by the arrow, with each batch of transponders moving continuously through the communication region 30 of the antennas 2, 10 of the interrogator apparatus 1, or being halted for a short period of time while within the communication region 30.

15th Embodiment

A further manner of applying the various mobile body discrimination apparatus embodiments described above (in which the interrogator apparatus antennas are moved with respect to the bodies which are

discriminated) is to scan a plurality of transponders by moving the communication region (or communication regions) of the antennas of a mobile body discrimination apparatus with respect to the transponders. Such a mobile body discrimination system is provided by the fifteenth embodiment of the invention that is illustrated in Fig. 33, in which a plurality of articles 151 such as books, etc., are supported on shelves 153 to be thereby situated in proximity to a common vertical plane (i.e., the plane of the front faces of the shelves 153), with each of the articles 151 having attached thereto a transponder 152 having stored within its memory information concerning that article 151, and with the transponders 152 each being oriented approximately facing outward, i.e., towards the common vertical plane. Each of the transponders 152 can be configured to be thin in shape, e.g., of the form of an IC card. A person carrying an interrogator apparatus 154, which is configured such as to be portable by an individual, walks alongside the shelves 153 while orienting the antennas 155 of the interrogator apparatus 154 towards the articles 151, to thereby bring successive groups of the transponder 152 within the communication region (or communication regions) of the antennas 155. In that way, the

interrogator apparatus 154 can rapidly scan successive transponders to acquire complete information concerning all or part of the articles 151 and, if necessary, transfer data to one or more of the transponders 151 to be written into the memory of the transponder.

16th Embodiment

A 16th embodiment of the invention is illustrated in views in elevation and plan, in Figs. 34A, 34B respectively. Here again, the bodies which are discriminated are held stationary, while the interrogator apparatus antennas are moved in relationship to these bodies. This embodiment is applicable for example to a warehouse in which information concerning stored items is automatically acquired and/or updated. In Figs. 34A, 34B, a plurality of stored items 157 are supported on shelves 158 of a housing 162, to be thereby respectively set in proximity to a common vertical plane as described for the preceding embodiment, with each of the stored items 157 having attached thereto a transponder 152 which has stored in its memory information concerning that item 157, with the transponders oriented outward towards the common vertical plane. An interrogator apparatus 159 is movably mounted for lateral motion on a horizontal rail 160, while the rail 160 is movably

mounted for vertical motion on a pair of fixed vertical rails 161, 162. The interrogator apparatus 159 and transponders 152 can be in accordance with any of the mobile body discrimination apparatus embodiments described hereinabove. The antennas 165 of the interrogator apparatus 159 are disposed in proximity to and oriented towards the shelves 158, so that by moving the interrogator apparatus 159 vertically and horizontally (by some form of drive mechanism, not shown in the drawing), all of the transponders 152 can be successively scanned by the interrogator apparatus 159.

The motion of the interrogator apparatus 159 can for example be controlled by a computer system 164, which can be coupled to receive data that are transferred from the transponders to the interrogator apparatus 159, to thereby acquire and process the data which are stored in the memories of the transponders 152 by automatic operation. That is to say, with such a mobile body discrimination system, the contents of a warehouse or other storage facility can be periodically automatically checked and registered by the operation of the computer system.

17th Embodiment

Fig. 35 is a general block diagram of a transponder and interrogator apparatus of a mobile body discrimination apparatus according to a 17th embodiment of the invention. This embodiment basically differs from the first embodiment shown in Fig. 1 in that the interrogator apparatus 401 of this embodiment utilizes a single antenna 2 and incorporates a data processing section 411 for deriving received response data and transponder ID (identification) codes from the output baseband signal of the demodulator section 5, and in that the transponder 404 of this embodiment randomly selects from a plurality of possible depths of modulation of the signal that is reflected from the antenna 24, with binary ASK (Amplitude Shift Keying) modulation being applied.

With this embodiment, the received demodulated response start command code which is obtained by the receiving and demodulator section 25 is supplied to a response timing control circuit 426, which in addition to applying a read-out control signal to the memory 23 to initiate transfer of the response data (together with the ID code assigned to that transponder) to the modulator at a time point that is selected based on a random number, as described for the first embodiment, also at that time applies an absorber element selection

control signal via a line 427 to the ASK modulator section 409, to determine the modulation depth that is to be used in transmitting response data to the interrogator apparatus.

5 The internal configuration of the ASK modulator section 409 is represented in a simple conceptual manner in Fig. 35, as a combination of a plurality of absorber elements, i.e., a 0 dB absorber element 412a, a 10 db absorber element 412b and a 20 dB absorber
10 element 412c in this example, and an absorber element selector 413 which is controlled by the modulation depth control signal to select a specific combination of two of the plurality of absorber elements to be used in ASK modulation operation. With this embodiment, the
15 combination of the 0 dB and 20 dB absorber elements (i.e., providing a modulation depth of 20 dB) or of the 0 dB and 10 dB absorber elements (i.e., providing a modulation depth of 10 dB) can be selected. The "0 dB absorber element 412a" need not necessarily correspond
20 to an actual physical component, but may simply represent the condition of the antenna 24 in which no absorption of the incident radio waves is applied.

 With this embodiment, the combination of absorber elements that is selected to perform the ASK modulation
25 is determined by the response timing control circuit

426 based on a random number which is generated when the response start command code is received from the interrogator apparatus 401 by the transponder 404. It would be possible to use the same random number which is employed to determine the time at which the response data are transmitted, as described for the transponder of the first embodiment. However with this embodiment, if respective sets of response data and ID data are transmitted by two transponder such as to overlap one another, and if these are transmitted using two respectively different modulation depths (i.e., with this example, 10 dB and 20 dB), the interrogator apparatus can acquire both of these two sets of response data, through the operation of a data processing section 411 as described in the following. Hence, it is preferable that the random number which is used for transmission timing determination be different from that used for determining the modulation depth.

This can be understood from Fig. 38, which shows the internal configuration of the response timing control section 426 of the transponder 404 of this embodiment. As shown, this differs from that of the first embodiment in that a random number generating section 426e is included, together with an absorber element selection control section 426f which generates

the aforementioned absorber element selection control signal.

The internal configuration of the data processing section 411 is as shown in Fig. 37, whose operation will be described referring to the waveform diagram example of Fig. 36. In Fig. 36, it is assumed that with a plurality of transponders moving through the communication region of the interrogator apparatus, a first transponder has transmitted its ID code and response data during a time interval which overlaps the transmission of ID code and response data by a second transponder. It is further assumed that the respective modulation depths that have been selected for the first and second transponders are 10 dB and 20 dB, so that the demodulated received baseband signals for these would respectively be as illustrated by the waveforms M1 and M2 if data conflict did not occur. In fact, the waveform of the received baseband signal that is produced in this case from the demodulator section 5 of the interrogator apparatus 401 will be as designated by Sa in Fig. 36. Here, Va indicates the baseband signal level which occurs when the 10 dB and 20 dB modulation levels overlap.

In Fig. 37, S_{in} is the received baseband signal, e.g., having the waveform of signal Sa in Fig. 36.

This is supplied to sequentially connected amplifier 501, limiter 502, subtractor 503, limiter 504, subtractor 505, and limiter 506, whose output is applied to an inhibit input of an AND gate 507. Sets
 5 of response data from respective transponders, produced from the AND gate 507 and from the limiter 506 respectively, are written into a data buffer register 508 and a data buffer register 509, before being successively transferred to the memory 9 by a selector
 10 510 under the control of a changeover signal Sch produced from a data transfer control section 511, which also controls data read-out and write-in operations of the buffer registers 508 509.

Each of the limiters can be implemented as a
 15 comparator which produces an output signal at a fixed high level when the input signal applied thereto exceeds a predetermined threshold value, indicated as V_b in fig 36, and otherwise produces the output signal at a fixed low level, e.g., 0 V. It will be assumed
 20 that V_b is made approximately equal to the aforementioned value V_a .

In Fig. 37, the output signal S_a from amplifier 501 is subtracted from the corresponding amplitude-limited signal S_b produced from limiter 502, to obtain
 25 signal S_c . That signal is similarly processed by the

limiter 504 and subtractor 505 to obtain signal S_e , which is converted to a fixed amplitude by the limiter 506 to obtain the signal Opt 1, from which the bit sequence corresponding to M2, i.e., the data conveyed by high-amplitude modulation can be obtained. Signal S_b is applied to one input of an AND gate 507 while signal OPT 1 is applied to an inhibit input of that AND gate to thereby mask the signal S_b , and so obtain the output signal Opt 2, from which the bit sequence corresponding to M2, i.e., the data conveyed by the low-amplitude modulation, can be obtained.

In that way, a set of response data from one transponder which are conveyed using the 10 dB modulation depth, and a temporally overlapping set of response data from another transponder which are conveyed using the 20 dB modulation depth, will be respectively written into the data buffer register 508 and the data buffer register 509 under the control of the data transfer control section 511. The two sets of response data are then sequentially transferred to the memory 9, via the selector 510.

It can thus be understood that with this embodiment, the maximum number of transponders which can move through the communication region of the antenna 2 of the interrogator apparatus 401 can be

increased by comparison with the first embodiment,
since even if conflict occurs between respective sets
of response data transmitted from two transponders, the
random selection of the 10 dB and 20 dB modulation
5 depths for these transmissions ensures that there is a
50% probability that the transmissions will have
respectively different depths of modulation, and so can
be separated from one another by the data processing
section 411 of the interrogator apparatus 401 in the
10 manner described above.

Although not shown in the drawings, each
transponder of this embodiment may include a rectifier
circuit for deriving an internal DC power supply from
the incident radio waves, as described for the first
15 embodiment. In that case it would also be possible with
this embodiment, as for the first embodiment, to
provide a second antenna which transmits only CW radio
waves. Alternatively, each transponder may be powered
by an internal battery.

20 Furthermore, it would be possible to use a greater
number of absorber elements, to obtain an increased
number of modulation depths that can be randomly
selected.

Also, it would be possible to modify this
25 embodiment such that when the interrogator apparatus

401 correctly receives a set of response data and ID code from a transponder, it transmits to that transponder a transmission halt command code, as described for the fifth embodiment, and such that each
5 transponder 404 further includes a "transmission halt" detection section and is controlled accordingly, as described for the fifth embodiment. This will enable the rate at which transponders pass through the communication region of the interrogator apparatus 401
10 to be further increased without loss of reliability of communication, by reducing the number of transmissions from transponders which are passing through the communication region. That is to say, the possibility of concurrent transmission by two transponders which
15 coincidentally determine the same modulation depth, by random selection, will be reduced.

18th Embodiment

Fig. 39 is a general block diagram of a transponder and interrogator apparatus of a mobile body
20 discrimination apparatus according to an 18th embodiment of the invention. This embodiment basically differs from the preceding embodiment with respect to the operation of a data processing section 611 of the interrogator apparatus 601, the inclusion of a
25 transmission halt command code detection section 528

(which operates similarly to that described for the fifth embodiment hereinabove), and the manner of selecting the modulation depths by the transponder 614, whereby the 20 dB value is selected only after the transponder has initially transmitted response data by using the 10 dB modulation depth after entering a communication region of the interrogator apparatus.

Specifically, when a transponder first transmits a response data set together with its ID code, performed following a randomly determined time interval after having entered the communication region of antenna 2 of the interrogator apparatus 601 and received a first response start command code from the interrogator apparatus, the response timing control section 526 of the transponder 614 generates a selection control signal whereby the 0 dB and 10 dB absorber elements are applied in ASK modulation, i.e., the modulation depth is selected as 10 dB for transmitting the response data and ID code of that transponder by modulated reflected radio waves back to the interrogator apparatus 601. If that transmission is successfully received completely by the interrogator apparatus 601, without conflict with any transmissions from other transponders, then the interrogator apparatus 601 transmits the "transmission halt" command signal, with the ID code of

that transponder attached thereto. When reception of that combination of transmission halt command code and ID code is detected by the transmission halt command code detection section 528 of the transponder 614, a control signal is generated which causes the response timing control section 526 to halt any further transmissions from that transponder until a predetermined time interval has elapsed, i.e., at least until after the transponder has exited from the communication region of antenna 2.

However if the transmission halt command code detection section 528 of the transponder 614 does not detect reception of that combination of the transmission halt command code and local ID code, then when the next response start command code is received by the response timing control section 526, it generates a selection control signal whereby the 0 dB and 20 dB absorber elements are selected, i.e., the response data and ID code are then transmitted using the 20 dB modulation depth. This is illustrated in the timing diagram of Fig. 43, in which one transponder, designated as 504a, has its first transmission (using the 10 dB modulation depth) successfully received by the interrogator apparatus, then receives the transmission halt command code and the ID code assigned

to transponder 614a. Another transponder, designated as 504b, does not receive that combination of the transmission halt command code and its ID code, so that when transponder 614b receives the response start
5 command code for the second time after entering the communication region of antenna 2, it transmits its ID code and the response data with the 20 dB modulation depth being applied.

Fig. 41 is a general block diagram showing the
10 internal configuration of the response timing control section 526 of the transponder 614. An absorber element selection section 526f is based on a counter circuit, which is automatically reset to produce the absorber element selection control signal at a first
15 level (for selection of the 10 dB modulation depth) when the transponder enters (or exits from) the communication region of the interrogator apparatus antenna, and is set to produce the absorber element selection control signal at a second level (for
20 selection of the 20 dB modulation depth) when two successive occurrences of the response start command code have been detected by the response start command code detection section 526a. The absorber element selection section 526f can thus be easily configured as
25 a counter which has a maximum count value of 2.

The automatic resetting of the absorber element selection section 526f can readily be implemented, for example when power is applied to the circuits of the transponder, in the case of the transponder being
5 powered by a rectifier circuit utilizing radio waves which are incident on the transponder as it passes through a communication region.

Thus, the absorber element selection control section 526f produces a selection signal whereby the 10 dB modulation depth is applied by the ASK modulator section 409 of the transponder at the first
10 transmission of response data and ID code by the transponder, in response to the first reception of a response start command code from the interrogator apparatus, thereby initiating a transmission by the
15 transponder. At the next reception of a response start command code, the absorber element selection control signal is produced at the second level, thereby causing the 20 dB modulation depth to be applied for all
20 subsequent transmissions of the response data and ID code by that transponder.

The above operations are illustrated in the timing diagram of Fig. 43. Here, one transponder which is designated as 504a successfully transmits its ID code
25 and response data after its first reception of a

response start command code from the interrogator apparatus. Hence, a transmission halt command code with the ID code for transponder 614a is then transmitted, so that no further data are transmitted by that transponder. Another transponder, which is designated as 504b, is not successful in transmitting its ID code and response data following its first reception of a response start command code after entering the communication region. Hence, when the transponder 614b performs its next transmission, after a randomly determined time interval following the next transmission of the response start command code from the interrogator apparatus, the 20 dB modulation depth is applied.

The basic operation of the control section 608 of the interrogator apparatus 601 of this embodiment is illustrated in the flow diagram of Fig. 42. Here, the response start command code is periodically transmitted, at each execution of step 2001. At each such execution, steps 2002, 2005 are successively executed to detect whether a set of response data and ID code are successfully acquired from a transponder before the next execution of step 2001. When such a successful acquisition from a transponder occurs, the received data and ID code are written into the memory 9

(step 2003), then the code for the transmission halt command code is read out and supplied, together with the ID code of the transponder whose data have been received, to the modulator section 7 to be transmitted (step 2004)

Fig. 40 shows the internal configuration of the data processing section 611 of the interrogator apparatus 601 of this embodiment. Here, a modulation depth detection section 610 judges the amplified baseband signal produced from amplifier 601, to produce an output signal at a first level when it is found that reception of data modulated with the 20 dB depth has started, and at a second level when it is found that reception of data modulated with the 10 dB depth has started, with that output signal being supplied to a data transfer control section 612. A high-modulation data extraction section 602 can be configured as the combination of limiters and subtractors 501 to 506 shown in Fig. 37 described above, which perform the function whereby only the data modulated using the 20 dB depth are extracted (as "Output 1) when conflict occurs between sets of received data which are respectively modulated at the 10 dB and 20 dB depths. The data thus extracted are written into a buffer

register 603, under the control of the data transfer control section 612.

On the other hand if a response data set and ID code are received without data conflict, which are
5 modulated using the 10 dB depth, then these data are obtained from the output of a limiter 604, and are written into a buffer register 605. If reception of data having the 20 dB modulation depth should begin while this is occurring, then the data transfer control
10 section 612 terminates write-in to the buffer register 605.

If the combination of limiters and subtractors 501 to 506 shown in Fig. 37 were to be used to implement the high-modulation data extraction section
15 602, then the function of the limiter 604 in Fig. 40 could actually be performed by the limiter 502.

When a complete set of response data and ID code have been written into either the buffer register 603 or buffer register 605, the data transfer control
20 section 612 begins to read out the contents of that buffer, after setting a selector 606 such as to select the output data from that buffer, and supplies the response data and ID code to the control section 608. The control section 608 can then attach that ID code to

the transmission halt command code which is transmitted at that time.

It can thus be understood that with this embodiment, if a transponder successfully transmits its response data and ID code to the interrogator apparatus 601 upon its first transmission of response data and ID code after entering the communication region of the interrogator apparatus, with that transmission being performed using a low modulation depth such as 10 dB, then that transponder will then receive a transmission halt command code that is addressed to it, and so will not perform any further transmissions while it traverses the communication region. However if the transponder fails to successfully transmit its response data and ID code to the interrogator apparatus 601 upon its first transmission after entering the communication region, then the second transmission of response data and ID code from that transponder (and any subsequent transmissions) will be performed using a high depth of modulation, e.g., 20 dB. In that case, even if the second transmission or any subsequent transmissions from that transponder should occur concurrently with a transmission from any other transponder which is executed using the low modulation depth, reception of the response data and ID code which are transmitted

using the high modulation depth will not be obstructed by such data conflict.

In that way, this apparatus assigns priority to receiving data from a transponder which has failed in a first attempt to communicate with the interrogator apparatus. In addition, the apparatus functions such as to prevent any unnecessary transmissions from transponders which have already successfully communicated with the interrogator apparatus and are traversing the communication region of the antenna of the interrogator apparatus. As a result, improved reliability of acquiring data from transponders can be achieved, together with an increase in the rate at which transponders can pass through the communication region.

As noted above, each transponder of this embodiment may include a rectifier circuit for deriving an internal DC power supply from the incident radio waves, as described for the first embodiment. In that case it would also be possible with this embodiment, as for the first embodiment, to provide a second antenna which transmits only CW radio waves. Alternatively, each transponder may be powered by an internal battery.

Furthermore, although in the above description the change to applying a high modulation depth (20 dB) from

a low modulation depth (10 dB) is performed after a transponder has unsuccessfully performed a first transmission of data after entering the communication region of the interrogator apparatus, it would be possible to effect that change in the modulation depth after a greater number of transmissions have been performed unsuccessfully by a transponder after entering the communication region.

19th Embodiment

Fig. 44 is a general block diagram of a transponder and interrogator apparatus of a mobile body discrimination apparatus according to a 19th embodiment. This embodiment basically differs from the 18th embodiment described above in that PSK (Phase Shift Keying) modulation is utilized by each transponder 704 rather than ASK modulation.

The response timing control section 726 of the transponder 704 produces a phase shifter selection control signal on a line 727, which is supplied to a PSK modulator section 709 to determine whether a combination of 0 degrees and 170 degrees phase shifters 712a, 712b, providing a PSK modulation range of 170 degrees, or a combination of 0 degrees and 180 degrees phase shifters 712a, 712c, providing a PSK modulation range of 180 degrees, will be selected to apply PSK

modulation to radio waves which are reflected from the antenna 24.

Fig. 45 shows the internal configuration of a response timing control section 726 of a transponder 704 of this embodiment. In the same way as for the preceding embodiment, the phase shifter selection control section 726f can be configured as a counter which is automatically reset when the transponder enters (or exits from) the communication region of the antenna of the interrogator apparatus, and which counts to a maximum value of 2 successive occurrences of the response start command code, whereupon the phase shifter selection control signal is changed from a first level (specifying selection of the 0 to 170 degrees PSK modulation range) to a second level (specifying selection of the 0 to 180 degrees PSK modulation range).

The operation of this embodiment is illustrated in the timing diagram of Fig. 46, in which a transponder which is designated as 704a successfully transmits its ID code and response data, using the 0 to 170 degrees PSK modulation range, after a randomly determined time interval following its first reception of a response start command code from the interrogator apparatus. Hence, a transmission halt command code with the ID

code for transponder 704a is then transmitted, so that no further data are transmitted by that transponder.

Another transponder, designated as 704b, is not successful in transmitting its ID code and response data following its first reception of a response start command code after entering the communication region.

Hence, when the transponder 704b performs its next transmission, after a randomly determined time interval following the next transmission of the response start command code from the interrogator apparatus, the 0 to 180 degrees range PSK modulation is applied by that transponder.

In that way, by using respectively different ranges of PSK modulation for the first transmission and for all subsequent transmissions of data by a transponder after entering the communication region, the interrogator apparatus can discriminate between reception of a signal from a transponder which is transmitting for the first time, and a transponder which has failed in at least one attempt at communication. The demodulator section 705 of the interrogator apparatus 701 of this embodiment can for example apply phase discrimination to produce an output signal whose amplitude varies in accordance with the degree of phase shift of the received PSK signal, with

that output signal being processed by the data processing section 811 of this embodiment in a similar manner to that described for the demodulated ASK signals of the preceding embodiment, and assign
5 priority to obtaining the response data and ID code from a transponder which has previously failed to communicate with the interrogator apparatus.

As noted above, each transponder of this embodiment may include a rectifier circuit for deriving
10 an internal DC power supply from the incident radio waves, as described for the first embodiment. In that case it would also be possible with this embodiment, as for the first embodiment, to provide a second antenna which transmits only CW radio waves. Alternatively,
15 each transponder may be powered by an internal battery.

Furthermore, although in the above description the change to applying the 0 to 180 degrees PSK modulation range from the 0 to 170 degrees modulation range is performed after a transponder has performed a first
20 transmission of data after entering the communication region of the interrogator apparatus, it would be possible to effect that change in the PSK modulation range after a greater number of transmissions have been performed by a transponder.

Also, the invention is not limited to the use of the specific values of PSK modulation ranges of 0 to 180 degrees and 0 to 170 degrees described for the above embodiment, and it would be possible to use other values.

20th Embodiment

Fig. 47 is a general block diagram of a transponder and interrogator apparatus of a mobile body discrimination apparatus according to a 20th embodiment. This differs from the 19th embodiment described above in that only a single PSK modulation range can be applied by each transponder 804, and in that a transponder applies attenuation of the reflected modulated radio waves when performing a first transmission of response data and ID code after entering a communication region of the interrogator apparatus, and performs any subsequent transmissions (if the first transmission is unsuccessful), while traversing the communication region, without such attenuation being applied.

In Fig. 47, the PSK modulator section 809 of a transponder 804 contains an attenuation section 812c having a selectable attenuator 812d, which is inserted or removed under the control of an attenuator insertion control signal applied via a line 827 from the response

timing control section 826. As shown, the attenuation section 812c is connected between the antenna 24 of the transponder and a selector 812a which, in conjunction with a 0 degrees phase shifter 812a and a 180 degrees phase shifter 812b performs the PSK modulation function, i.e. with the selector 812a being driven in accordance with data read out from the memory 23.

Fig. 48 shows the internal configuration of the response timing control circuit 826 of a transponder of this embodiment. This is similar to that of the preceding embodiment, and an attenuator insertion control section 862f which generates the aforementioned insertion control signal can for example be configured as a counter which is reset when the transponder enters (or exits from) the communication region of the interrogator apparatus, and whose output changes in level when two successive response start command code occurrences have been detected by the response start command code detection section 826a.

The operation of this embodiment is illustrated in the timing diagram of Fig. 46, in which a transponder which is designated as 804a successfully transmits its ID code and response data, with the attenuator 812c applied, after a randomly determined time interval following its first reception of a response start

command code from the interrogator apparatus after entering the communication region of the antenna 2. Hence, a transmission halt command code with the ID code for transponder 804a is then transmitted to that transponder, so that no further data are transmitted by it. Another transponder, designated as 804b, is not successful in transmitting its ID code and response data following its first reception of a response start command code after entering the communication region. Hence, when the transponder 804b performs its next transmission, after a randomly determined time interval following the next transmission of the response start command code from the interrogator apparatus, the transponder 804b again transmits its ID code and response data by PSK modulation of the reflected radio waves, but with the attenuator 812c disconnected from the antenna 24, so that a substantially higher amplitude of modulated reflected signal will be received by the interrogator apparatus 801 from that transponder.

In that condition, if another transponder should also perform a transmission at that time with the attenuator applied, so that conflict occurs between that transmission and the transmission from transponder 804b, the substantially higher amplitude of the PSK

modulated signal that is received by the interrogator apparatus 801 from the transponder 804b will ensure that the output signal obtained from the demodulator section 712 of the interrogator apparatus 801 will accurately express the ID code and response data which have been transmitted from transponder 804b.

Hence with this embodiment, as for the preceding embodiment, the interrogator apparatus assigns priority to reception of data from transponders which have failed in a first attempt at communication after entering the communication region, thereby ensuring higher reliability of operation.

Although not shown in the drawings, each transponder of this embodiment may include a rectifier circuit for deriving an internal DC power supply from the incident radio waves, as described for the first embodiment. In that case it would also be possible with this embodiment, as for the first embodiment, to provide a second antenna which transmits only CW radio waves. Alternatively, each transponder may be powered by an internal battery.

21st Embodiment

Fig. 50 is a general block diagram of a transponder and interrogator apparatus of a mobile body discrimination apparatus according to a 21st

embodiment. The configuration shown in Fig. 50 is similar to that of the 19th embodiment described hereinabove, however this embodiment differs from the 19th embodiment in that each data transmission performed by a transponder consists of a header portion containing the ID code of the transponder together with data key information (described hereinafter), which precedes the response data set, and also in that the header portion is always transmitted using a high ASK modulation depth (e.g., 20 dB) while the response data is always transmitted using a lower depth of modulation (e.g., 10 dB). The data key information is derived beforehand, in relation to a response data set, in such a way as to enable the data key information to be used by the interrogator apparatus to correct errors which may occur due to conflict with response data that are transmitted from some other transponder. Since various well-known ways of implementing such a feature could be utilized, which might for example include encoding of the response data before transmission and applying decoding through use of the data key information at the time of extraction by the data processing section 931, detailed description will be omitted. In addition, this embodiment applies the feature, described for the preceding embodiments, of transmitting the transmission

halt command code to each transponder from which the interrogator apparatus has successfully acquired data.

Fig. 52 shows the configuration of the data processing section 931 of the response timing control circuit 921 of this embodiment. A received amplified baseband signal conveying a header and response data set transmitted from a transponder 924 is supplied from the amplifier 901 to a limiter 902, and to a header extraction section 905 which begins to extract the header portion, containing the transponder ID code and the aforementioned data key information, supplies the leading part of the header to the data transfer control section 907 to notify the data transfer control section that a new set of data have started to be received from a transponder, and supplies the header to a buffer register 906 to be written therein under the control of the data transfer control section 907.

The header extraction section 905 performs a similar function to that of the high-modulation data extraction 602 of the 18th embodiment shown in Fig. 40, i.e., that of the series of limiters and subtractors 502 to 506 shown in Fig. 37 which can operate on a received signal containing overlapping ASK modulated data at the 20 dB modulation depth and 10 dB modulation depth to extract only the data conveyed

using the 20 dB modulation depth. Thus, when a transponder transmits a header while another transponder is already transmitting response data at the 10 dB modulation depth, the header will be
5 correctly obtained from the header extraction section 905. The extracted header is written into the buffer register 906, then supplied to the data transfer control section 907. The data transfer control section 907 then extracts the aforementioned data key
10 information ECinf from the header, and supplies that information to the data extraction section 903.

The limiter 902 converts the output signal from amplifier 901 to a binary signal, which is supplied to the data extraction section 903, in which the response
15 data set which succeeds the header are processed to correct any errors which may result from data conflict. Specifically, if that response data set should be received while a preceding response data set is being received, then the data key information ECinf is
20 applied such as to ensure that the later response data set will be correctly produced from the data extraction section 903. The resultant data are written into the data buffer register 904, with any existing contents being overwritten.

When a complete set of response data have been written into the data buffer register 904, the data transfer control section 907 generates a selection control signal Sch such as to first set a selector 909 to select the output from the header buffer register 906, then reads out the ID code portion of the header that is held in the buffer register 906, to be transferred and written into the memory 9. The selector 909 is then controlled to select the output from the data buffer register 904, and the response data set which is held in that buffer register is then read out and transferred to be written into the memory 9.

The above operation is illustrated in the flow diagram of Fig. 53, which shows the basic operation of the data processing section 931 and control section 938 in combination. As can be understood from steps 3003, 3004, 3009, if a new header is received while processing of a response data is in progress, then the response data set which is attached to that new header will begin to be processed and written into the data buffer register, i.e., the previous contents of that buffer register are discarded. Also, as shown in step 3007, after the ID code and response data set have been successfully acquired from a transponder, the

transmission halt command code is then sent to that transponder, to prevent any further transmissions from it as it traverses the communication region of the interrogator apparatus.

5 Fig. 51 is a timing diagram showing an example of the interrogator apparatus 921 receiving transmissions from four transponders, respectively designated as 924a, 924b, 924c and 924d, with parts of these transmissions overlapping along the time axis. The
10 uppermost line of the diagram illustrates the data which are received completely by the interrogator apparatus (i.e., are written into the buffer registers 904, 906 of the data processing section 931 in their entirety). The second line shows respective
15 transmissions of the transmission halt command code by the interrogator apparatus. The third, fourth, fifth and sixth lines show the transmissions respectively performed by the transponders 924a, 924b, 924c and 924d. It is assumed that the transponder 924a
20 transmits a header and response data set, designated as 1502a, 1503a respectively, whereupon the data processing section 931 of the interrogator apparatus stores the received header, and begins to write the response data set 1503a into the data buffer register
25 904. While that is in progress, the transponder 924b

transmits a header and response data set, designated as 1502b, 1503b respectively, whereupon the data processing section 931 writes that header into the buffer register 906 and begins to write the response data 1503a into the buffer register 904. Since this is completed without conflict with any other transmissions, the ID code and response data set of transponder 924b are then written into the memory 9 of the interrogator apparatus, which then transmits the transmission halt command code 1504 to that transponder.

In this example, a part of the response data 1503a transmitted from the transponder 924a overlap the response data 1503b which are transmitted from transponder 924b, i.e., data conflict occurs. However as described hereinabove, the response data 1503b are related to the data key information conveyed in the header 1502b such that the response data 1503b can be correctly extracted by the data processing section 931.

Subsequently, transponder 924a again transmits its header and response data, and in this case there is no data conflict with a header transmitted from some other transponder, so that the ID code and response data set of transponder 924a are acquired by the interrogator apparatus 921, which then transmits a transmission halt

command code 1507 directed to the transponder 924a. In a similar manner, the ID code and response data set of transponder 924d are successfully acquired by the interrogator apparatus, which then transmits the transmission halt command code 1509 directed to transponder 924d.

If conflict occurs between two headers which are transmitted by respective transponders, then it will not be possible for the interrogator apparatus 921 to acquire data from either of these transponders. However since the header can be configured from only a small number of bits, the probability of such conflict is relatively small.

In the above, it is assumed that each header is transmitted using the large depth of ASK modulation (20 dB), so that a header can be correctly extracted even when data conflict occurs between it and a response data set that is transmitted using the low modulation depth (10 dB). However as described for the circuit of Fig. 37, it is possible to configure a data processing section such as to extract either the high modulation depth data (i.e., OPT 1), or the low modulation depth data (i.e., OPT 2). Hence, with the 21st embodiment it would be equally possible for each transponder to transmit a header by applying the low modulation depth

and transmit a response data set by applying the high modulation depth, with similar effects to those described above being obtainable.

Furthermore although the above embodiment has been described for the case of ASK modulation being performed by each transponder, it would be equally possible to apply PSK modulation. In that case for example, the principles described hereinabove for the 20th embodiment could be utilized, such that attenuation of the reflected PSK modulated signal from a transponder is applied when a response data set is transmitted, with that attenuation being removed when a header is transmitted. In that way, the data processing section of the response timing control circuit 921 can easily be configured to extract each header, even when data conflict occurs between a header and a response data set which are transmitted by respectively different transponders.

Furthermore the above embodiment could be modified such that when an ID code of a transponder is acquired by the interrogator apparatus but (due to data conflict) the corresponding response data set is not acquired, the interrogator apparatus subsequently transmits a retransmit request signal, attached to the ID code of that transponder. In the same way as for

the response start command code transmissions, these retransmit request signals could be transmitted at predetermined periodic timings when required. In that case it could be arranged that each transponder normally performs only one data transmission after entering the communication region and receiving a response start command code, but performs one or more subsequent transmissions if the retransmit request signal is received. In that case, use of the transmission halt command codes would be unnecessary.

Each of the apparatuses of the 17th to 21st embodiments described above can be applied to a mobile body discrimination system such as that shown in Fig. 3, with a transmitting section and second antenna as shown in Fig. 1 being added, for illuminating the transponders with unmodulated radio waves in the intervals between transmissions of the Response Start command code, as described for the first embodiment.

22nd Embodiment

A 22nd embodiment of the invention will be described in the following, which is a microwave power supply circuit for use in a transponder of a mobile body discrimination apparatus such as that of the transponder 20 of the first embodiment shown in Figure 54, to generate DC supply power for operating the

circuits of the transponder by rectifying a signal obtained from received radio waves, with a high level of rectification efficiency being achieved.

Figure 54 is a circuit diagram of this embodiment, in which 4102 is a microwave receiving antenna, 4103 is a representation of the distributed inductance and capacitance (indicated by inductor 4103a and capacitor 4103b respectively) of a matching circuit section which is connected to the antenna 4102, and 4108 is a rectifier circuit section for performing half-wave rectification, formed of a diode 4104 and an adjustment capacitor 4105 that is connected in parallel with the diode 4104. 4104 is a low pass filter section for smoothing the output power from the rectifier circuit section 4108, and 4107 denotes the output terminals of the power supply circuit.

The antenna 4102 is preferably formed by pattern shaping, as a patch antenna, on the substrate of an IC. The matching circuit section 4103 is designed in conjunction with the reactance of the rectifier circuit section 4108 (i.e., as determined by the inter-terminal capacitance of the diode 4104, the series inductance of the diode and its connecting leads, stray capacitances of the diode with respect to ground), such as to maximize the transfer of energy from the antenna to the

rectifier circuit, i.e., such as to maximize the rectification efficiency. The matching circuit section 4103 would typically be formed of a suitable length of microstrip (sometimes referred to as a strip transmission line) which connects the antenna 4102 to the diode 4104. The low pass filter section 4106 smoothes the output DC supply that is produced from the diode 4104.

With the above configuration, the antenna 4102 receives radio waves in the microwave band which are transmitted from an inquiry apparatus, and supplies the received signal via the matching circuit section 4103 to the rectifier circuit section 4108. The rectifier circuit section 4108 rectifies the microwave signal, by the diode 4104, and the resultant output is passed through the low pass filter section 4106 to the output terminal 4107, as DC power. If the capacitance and inductance values of the matching circuit section 4103 are appropriate in relation to those of the diode 4104, then the rectification efficiency of the microwave power supply circuit will be maximized, i.e., the received microwave signal will reach the rectifier circuit section with a minimum of losses. However the value of capacitance between the terminals of the diode 4104 exhibits a large amount of manufacturing

variations. The graph of Figure 55 illustrates the relationship between the rectification efficiency achieved and the inter-terminal capacitance of the diode 4104. Figure 55 shows the case is in which the matching circuit section 4103 has been designed on the assumption that a diode 4104 having an inter-terminal capacitance value of 0.1 pF will be used in the rectifier circuit of the microwave power supply circuit, and the variation of the rectification efficiency as the actual inter-terminal capacitance value of the diode 4104 varies with respect to that design value of capacitance of 0.1 pF. As can be seen from Figure 55, the rectification efficiency deteriorates substantially if the actual inter-terminal capacitance value differs by as small an amount as plus or minus 0.5 pF from the nominal value of 0.1 pF. This is due to the fact that the degree of impedance matching between the rectifier circuit and the antenna 4102 is adversely affected by such a change in the inter-terminal capacitance value, so that the losses which result from mismatching are increased.

To counteract this, the values of the inductance 4103a and the capacitance 4103b which constitute the matching circuit section 4103 can be adjusted, i.e., to compensate for the manufacturing deviations of the

inter-terminal capacitance value of the diode 4104. However such adjustment is difficult to perform, and this is a reason why satisfactory characteristics cannot be obtained from mass-production of such microwave power supply circuits. Specifically, it is the main reason that rectification efficiency figures which are based on results obtained from small-lot testing cannot be achieved in actual mass-production.

However with this embodiment of the present invention, such adjustment is implemented by providing an adjustment capacitor 4105 connected between the anode and cathode terminals of the diode 4104, with the manufacturing variations of the inter-terminal capacitance value of the diode 4104 being compensated by adjusting the value of the adjustment capacitor 4105 such as to bring the rectification efficiency to a satisfactory level, i.e., to thereby counteract the mismatching which results from variations in the inter-terminal capacitance value of the diode 4104 from a nominal value. That is to say, the matching circuit section 4103 can be configured (e.g., as a fixed length of microstrip) on the assumption of a standard value of that inter-terminal capacitance value for the diode 4104. At the time of manufacture, by varying the value of the adjustment capacitor 4105 to counteract any

variation of the actual value of the inter-terminal capacitance value of the diode 4104 from the design value (e.g., 0.1 pF in the example of Figure 55) the deterioration of the rectification efficiency which results from such manufacturing variations can be quickly and easily prevented.

The value of capacitance of the adjustment capacitor 4105 can for example be made variable in the range 0 pF to 0.5 pF.

Thus with this embodiment, a microwave power supply circuit for operating the internal circuits of a transponder can be realized whereby the deterioration of rectification efficiency that results from manufacturing deviations of the capacitance value of the rectifier diode of such a power supply circuit in relation to an optimum value of such capacitance can be easily compensated. A uniformly high level of rectification efficiency can thereby be achieved, in mass-production of such a power supply.

Figure 56 is a conceptual diagram for illustrating the relationship between a power supply circuit of the form described above, implemented in a transponder having a main substrate 4402 upon which a number of integrated circuit chips are mounted, respectively interconnected by a pattern of connecting leads which

are formed on the main substrate, and with the components of the power supply circuit of Figure 54 other than the antenna being formed in one of these integrated circuit chips, designated by numeral 4401, and with the antenna being formed as a patch antenna 4502 upon the main substrate of the transponder. Numeral 4509 denotes a test terminal, to which a standard test signal in the microwave band is applied at the time of adjusting the adjustment capacitor 4403, while monitoring the output DC power obtained from the output terminals 4507. The matching circuit 4503 can consist of a fixed length of microstrip as described above, formed on the main substrate 4402 and extending from the antenna 4502 to a connecting terminal (i.e., a "bump" as described hereinafter) of the integrated circuit chip 4401, which is coupled to the rectifier diode.

Figure 57 is a general view of a physical arrangement corresponding to Figure 56 whereby the capacitance adjustment feature of this embodiment can be readily implemented. Specifically, Figure 56 is a view in elevation of the integrated circuit chip 4401 constituting the power supply circuit of Figure 54, mounted on the main substrate 4402 of the transponder. In Figure 57, the adjustment capacitor 4105 shown in

Figure 54 is constituted by an electrode 4404 which is formed on a surface of the IC chip 4401 in combination with an electrode 4405 which is formed the transponder main substrate 4402. Numeral 4408 denotes one of a plurality of "bumps", i.e. portions of a suitable electrically conductive material such as solder, for connecting the circuits of the integrated circuit chip 4401 to circuit leads that are formed on the main substrate 4402, and attaching the integrated circuit chip to the main substrate.

The integrated circuit chip 4401 is mounted in flip-chip configuration on the main substrate 4402, i.e., with the side of the integrated circuit chip having external connection terminals formed thereon being disposed opposite and adjacent to the transponder main substrate 4402, and connected to the main substrate by the aforementioned bumps 4408. With the arrangement shown in Figure 57, a parallel-plate type of capacitor is formed, which functions as the adjustment capacitor 4105. At the time of mounting the integrated circuit chip 4401 on the main substrate 4402 and performing adjustment, a fixed-amplitude test signal which is in the microwave frequency band is supplied to the aforementioned test terminal 409, in place of an antenna signal, and the level of output DC

power that is thereby obtained from the output terminals 4107 is measured, e.g., based on the output voltage obtained when the circuits of the transponder are being supplied. The ratio of the available output power to the test signal amplitude expresses the rectification efficiency of the power supply circuit, which attains a maximum when the actual inter-electrode capacitance of the rectifier diode is close to its design value, as described above referring to the graph of Figure 55.

Specifically, as an initial condition prior to beginning adjustment, the initial height of each of the bumps 4408 is made such that the initial capacitance value of the adjustment capacitor 4105 (determined by the spacing between the integrated circuit chip 4401 and the main substrate 4402) is made sufficiently small, e.g., substantially close to 0 pf. The adjustment is performed by applying a fixed level of test signal to the test terminal 4109 while monitoring the aforementioned output DC power level, and adjusting the height of the bumps 4408 by applying a successively increasing degree of force in a direction such as to move the integrated circuit chip 4401 towards the main substrate 4402. As a result, the rectification efficiency will gradually increase as shown in Figure

55, with the output DC power correspondingly increasing. When the output DC power level attains a predetermined value, the adjustment operation is terminated.

5 In that way, adjustment can be applied to eliminate the loss of rectification efficiency due to impedance mismatching in the connection between the antenna 4102 and rectifier diode 4104.

10 For example, assuming the size of each of the electrodes 4404, 4405 to be 250 microns square, and the dielectric constant of the supporting material to be 5, and that the bump height can be varied from 60 to 20 microns, then the value of the adjustment capacitor 4105 can be varied from 0.5 pF to 15 pF.

15 In that way, a microwave power supply circuit can be realized whereby, by gradually altering an amount of force that is applied to the IC 4401 when performing mounting of the IC on the main substrate, the value of the capacitor 4105 can be adjusted such as to establish
20 a substantially uniformly high degree of rectification efficiency for such power supply circuits, even when manufactured under mass-production conditions.

 In the above description, electrodes are provided on the IC 4401 and on the main substrate 4402, to
25 constitute the adjustment capacitor 4105. However it

would be equally possible to mount both of the electrodes of the adjustment capacitor 4105 on the IC 4401, or to mount both of the electrodes on the main substrate 4402, with one of these electrodes being made
5 movable and provided with an adjustment portion. The adjustment portion can be configured such as to move one electrode towards the other when force is applied to the integrated circuit chip causing the chip to be moved towards the main substrate 4402.

10 Furthermore, in the above description it is assumed that adjustment is applied to each of the microwave power supply circuits individually. However it would be equally possible to measure the characteristics of respective manufacturing batches of
15 rectifier diodes 4104 beforehand, and to apply the same amount of compensation to all of a set of microwave power supply circuits which each incorporates a diode from the same manufacturing batch.

23rd Embodiment

20 A 23rd embodiment will be described in the following, which is also a microwave power supply circuit for a transponder of a mobile body discrimination apparatus, having the circuit configuration shown in Figure 58. In Figure 58, a
25 rectifier circuit section 4308 has a diode 4304 with

the anode terminal connected to the circuit ground potential and an adjustment capacitor 4305 connected in parallel with the diode. This embodiment differs from that of Figure 54 in that the anode terminal of the diode 4304 is connected to ground, so that the rectification conversion losses due to the series resistance component of the diode are eliminated. The circuit is implemented on an integrated circuit chip.

With this embodiment, with the adjustment capacitor 4305 connected in parallel with the diode 4304, the capacitance of the adjustment capacitor 4305 alone can readily be adjusted to compensate for the impedance mismatching that may be caused by manufacturing variations in the inter-terminal capacitance value of the diode 4304 and in the mounting conditions of the diode 4304, and the effects of variations in the shapes of connecting leads on the integrated circuit chip. The relationship between rectification efficiency and deviations of inter-electrode capacitance of the rectifier diode 4304 of this embodiment from a design value of capacitance, for this embodiment, is similar to that shown in Figure 55. The value of capacitance of the adjustment capacitor 4305 can for example be made variable in the range 0 pF to 0.5 pF.

The physical implementation of the adjustment capacitor 4305 can for example be as shown in Figure 57 described above, in which case the electrodes 4404 and 4405 will constitute the respectively electrodes of the adjustment capacitor 4305, with the adjustment being performed by applying a gradually increasing force which brings the integrated circuit chip gradually closer to the main substrate, as described for the preceding embodiment.

24th Embodiment

A 24th embodiment of the present invention will be described in the following, which is also a power supply circuit for use in a transponder. The circuit of this embodiment is shown in Figure 60. As can be seen, the circuit configuration and physical arrangement, with an integrated circuit chip constituting the circuits of the power supply circuit being mounted on a main substrate of a transponder, and with the antenna used by the power supply circuit being formed by patterning on that main substrate, are similar to those of the 22nd embodiment shown in Figure 56. However this embodiment differs in that a combination of a fixed (DC blocking) capacitor 4703 and an adjustment inductor 4605, connected in series, is connected in parallel with the rectifier diode 4701, to

form the rectifier circuit section 4708 of this embodiment. The adjustment inductor is formed in the shape of a flat spiral, and adjustment is performed by successively short-circuiting adjacent conductors which form part of the spiral, to thereby successively reduce the inductance from an initial value.

When the inductance value of the adjustment inductor 4605 is altered, a relationship is obtained between the changes in inductance and the rectification efficiency of the power supply circuit which is similar to the relationship shown in the graph of Figure 55 between the rectification efficiency and variation of the capacitance between the terminals of the rectifier diode, for the 22nd embodiment.

Fig. 59 is a general view in elevation of a physical arrangement corresponding to Figure 60 whereby the inductance adjustment feature of this embodiment can be readily implemented. Only the points of difference between this embodiment and the 22nd embodiment will be described, since the basic configuration is similar to that shown in Fig. 57 described above. Specifically, Figure 59 is a view in elevation of the integrated circuit chip 4601 constituting the power supply circuit of Figure 60, mounted on the main substrate 4402 of the transponder.

In Figure 59, the adjustment inductor 4605 shown in Figure 60 is constituted by a flat spiral inductor which is formed as a patterned layer of conducting material on the upper surface of main substrate 4402.

5 Numeral 4603 denotes a connecting lead which interconnects a plurality of protrusions 4604a, 4604b, 4604c, referred to in the following as adjustment bumps, which can be formed of a similar material to that of the aforementioned bumps 4408, i.e., an
10 electrically conducting material such as solder which is sufficiently ductile at normal temperatures to be capable of being deformed by the application of a moderate amount of force (that is to say, a level of force which can be applied, acting on the body of the
15 integrated circuit chip 4401, without causing damage to the chip). The adjustment bumps 4604a, 4604b, 4604c are of varying lengths, are all connected together within the integrated circuit chip 4401, and are respectively positioned above the spiral inductor 4606
20 as shown, such that by applying force which pushes the integrated circuit chip 4401 towards the main substrate 4402, and so gradually deforming and reducing the height of the bumps 4408, a first point will be reached at which two adjacent portions of the spiral conductor
25 of the inductor 4605 will be short-circuited by the

adjustment bumps 4604a, 4604b, thereby producing a specific amount of reduction of the inductance of the spiral inductor 4605. If that force continues to be applied, subsequently a second point will be reached at which three adjacent portions of the spiral conductor of the inductor 4605 will be short-circuited by the adjustment bumps 4604a, 4604b and 4604c.

It will be understood that in practice the number of turns constituting the spiral inductor 4605, and the number of adjustment bumps, may be greater than those shown in the simple example of Fig. 59. However it can be seen that this embodiment enables inductor adjustment, for optimizing the degree of matching between the antenna 4502 and the power supply circuit section 4708, and thereby maximizing the amount of energy which is transferred from the antenna to be converted to output DC power, to be easily performed at the stage of manufacture of a transponder which incorporates such a power supply circuit. That is to say, such adjustment is performed simply by applying a gradually increasing level of force to the integrated circuit chip 4601 while applying a fixed-amplitude test signal to the test terminal 4509 and monitoring the level of output DC power which can be obtained at the output terminals 4507, and halting the application of

force to the integrated circuit chip when the level of DC power reaches a predetermined acceptable value.

Thus in the same way as for the 22nd embodiment, this embodiment enables compensation to be applied for variations of the inter-terminal capacitance of the rectifier diode 4701, variations in stray capacitances between circuit leads and ground potential, etc., such as to enable a uniformly high degree of rectification efficiency to be achieved, even under mass-production conditions of manufacture.

When a transponder incorporates a microwave power supply circuit according to any of the 20th, 21st or 22nd embodiments described above, it has been found that even if only a low level of input power such as 1 milliwatt is received as the electric field strength at the antenna of the transponder, the rectifier circuit section will provide satisfactory operation, with a high degree of rectification efficiency being achieved. In the case of the 20th embodiment, assuming that the transmission power of the inquirer apparatus is 300 mW, and that the antenna gain factor of the transmitting/receiving antenna of the transponder is 15 dBi, received signal power of 1 mW will be obtained at the transponder antenna when the inquirer apparatus is

spaced apart from the transponder by approximately 1 meter.

Thus for example if the transponders 815 are respectively attached to articles such as baggage items which are moved by a conveyer belt, so that the articles can be respectively identified by the inquirer apparatus, then since the operating range of the transponder is approximately 1 meter, a mobile body discrimination system can be realized which is capable of handling variations in the distance between the inquirer apparatus antenna and the transponders that may result from variations in height of the articles having the transponders attached thereto.

25th Embodiment

A 25th embodiment of the invention will be described referring to Figs. 61 and 62. This is a transponder for use in a mobile body discrimination apparatus, which functions as a non-contact IC card that can be attached to an article and store data relating to that article, and can both transmit and receive data to/from an interrogator apparatus, i.e., an IC card reader/writer apparatus. The IC card is shown in a cross-sectional view in elevation in Fig. 61 while Fig. 62 shows the configuration of an antenna connecting lead of the embodiment.

In Fig. 61, 7101 and 7102 are two substrates having respective plane faces attached together, such as by an adhesive material 7111, and 7103a, 7013b are respective electrically conductive layers each
5 connected to ground potential, which have respective slot apertures formed therein by a patterning process, and will be referred to in the following as ground pattern layers. These are formed on respective outer
10 faces of the two substrates 7101, 7102 as shown. 7104 is an antenna connecting lead that is formed on an inner layer of one of the substrates 7010, 7102, 7106 is an aperture formed in the substrate 7102 to
15 accommodate a transponder IC 7105 which is mounted on that substrate. The transponder IC 7105, in addition to circuit sections for implementing the functions of a
20 transponder, such as those of transponder 20 of Fig. 1 or of various other transponder embodiments described above, contains a power supply circuit which is
connected via one of a plurality of bumps 7107 to the
25 antenna connecting lead 7104, and which can constitute for example the rectifier circuit 21 of the first embodiment shown in Fig. 1. The transponder IC 7105 is mounted in flip-chip configuration on the substrate 7101, by means of the bumps 7107. Respective slots 7109a, 7109b are formed in the ground pattern layers

7103a, 7103b that are formed on the substrates 7102, 7101 respectively. The slots function in combination with respective portions of the antenna connecting lead 7104 as respective slot antennas, for receiving signals in the microwave frequency range which are transmitted from an external interrogator apparatus, i.e., an IC card reader/writer apparatus (not shown in the drawing) and for returning modulated reflected signals to that reader/writer apparatus. The ground pattern layer 7103a is connected to the circuit ground potential of the integrated circuit chip 7105 via a through-hole connector 7108, a connecting lead formed on the substrate 7101, and one of the bumps 7107. The ground pattern layer 7103b is similarly connected to the circuit ground potential, via a through-hole connector 7208.

Various types of microwave-band antennas are used in non-contact IC cards, for example an antenna formed as a patterned portion of an electrically conducting layer which is formed on a substrate of the card, such as a line antenna or a loop antenna, or a flat patch antenna. However when such an antenna is formed internally in a non-contact IC card, the communication characteristics of the antenna will be adversely affected by the conditions of use of the card, such as

if the antenna is disposed close to a metal body. A flat patch antenna is formed above and separated from a layer of electrically conductive material which functions as a ground plane, and will generally not be adversely affected by the presence of an object close to the rear face of the card, i.e., adjacent to the ground plane layer. However when that rear face is disposed facing towards the reader/writer apparatus, communication between the IC card and the reader/writer apparatus may not be possible, since the antenna may become substantially shielded from incident radio waves. Thus there is the problem that when such a non-contact IC card can be used in a mobile body discrimination system, it must be attached to an article by a specific one of its main faces.

With this embodiment of the invention, having each of the slot antennas 7109a, 7109b coupled to the antenna connecting lead 7104, if there is an object disposed adjacent to the rear face of the card (for example, if the outer face of the ground pattern layer 7103b is adhesively attached to an article), then the impedance of the slot 7109b will be thereby altered, and the electromagnetic field coupling between that slot and the antenna connecting lead 7104 will be eliminated, so that the antenna formed at that side of

the card by the slot 7109b will be unable to receive signals. However in that case, the slot 7109a on the other side of the card will function as an antenna so that communication with the reader/writer apparatus can be performed.

The antenna connecting lead 7104 of the slots 7109a, 7109b can for example be implemented as shown in Fig. 62. Here, the antenna connecting lead 7104 is formed of a straight portion 7202 and a pair of branch leads 7201a, 7201b, with the portion 7202 connecting the circuits of the IC chip 7105 to a junction of the two branch leads 7201a, 7201b, which are respectively coupled to the slots 7109a, 7109b. Thus for example if there is an object on the side of the non-contact IC card that is adjacent to the slot 7109b, then the impedance and the resonance frequency of the slot 7109b will be changed, and the electromagnetic field coupling to the corresponding connection lead branch 7201b will disappear. However this will not result in an alteration of the characteristics of the slot 7109a, which will function as an antenna. Hence, signals produced from the IC 7105 can be transmitted by that antenna, and signals transmitted by the reader/writer apparatus can be received by the IC 7105.

If the length of each of the antenna connecting lead branches 201a, 201b is made equal to $1/2$ wavelength of the microwave frequency which is used for communication with the IC card, then impedance variations of the slot 7109b will not adversely affect the operation of the slot 7109a as an antenna, and vice-versa.

Thus with this embodiment as described above, respective ground pattern layers are formed on the front and rear faces of the IC card, and respective apertures are formed in these ground pattern layer to function as microwave slot antennas. As a result, a non-contact IC card can be realized which can be oriented with either the front or the rear face of the card oriented towards an IC card reader/writer apparatus, with reliable communication being ensured in either condition.

26th Embodiment

A 26th embodiment of the invention will be described referring to Fig. 63. This is a non-contact IC card which is shown in a cross-sectional view in elevation in Fig. 63.

In Fig. 63, 7304 is a sealing material which seals a transponder IC 7105, 7309 is a ground pattern layer which is formed on top of the sealing material

7304, 7109a is a slot which is formed in the ground pattern layer 7309. The embodiment of Fig. 63 differs from the twenty-fifth embodiment in that, instead of the substrate 7102, the sealing material 7304 is used as a dielectric material, with the slot 7109a being formed as an antenna on top of the sealing material 7304. Hence with the 24th embodiment, only a single substrate is used, so that it has the advantage of enabling the IC card to be made thin in shape and low in manufacturing cost. In other respects, the configuration and operation are basically similar to those of the twenty-fifth embodiment.

The ground pattern layer 7103, the slot 7109b, and the antenna connecting lead 7104 are formed on the substrate 7101, while the transponder IC 7105 is mounted in flip-chip configuration on the substrate, sealed by the sealing material 7304. The ground pattern layer 7309 and slot 7109a are formed on top of the sealing material 7304. If the IC 7105 were to be mounted in the face-up configuration, then in order to make the ground pattern layer 7309 and the ground pattern layer 7103 have the same electrical potential it would be necessary to form through-hole connectors in the substrate 7101 and in the sealing material 7304 to establish a connection. However with the

configuration of this embodiment, the integrated circuit chip 7105 is manufactured with a layer of electrically conductive material 7307 formed over at least a part of the opposite face of the integrated circuit chip from the bumps 7107, i.e., formed over the face of the integrated circuit chip which becomes the upper face when the chip is mounted in flip-chip configuration, as viewed in Fig. 63.. That layer of electrically conductive material 7307 is connected (via the interior of the integrated circuit chip, or via an external connection and one of the bumps) to the ground potential of the internal circuits of the integrated circuit chip 7105, at the time of manufacture of the integrated circuit chip, and comes into contact with the ground pattern layer 7309 which is formed over the IC 7105 and the sealing material 7304. As a result, it is not necessary with this embodiment to provide a through-hole connector in the sealing material 7304.

The antenna connecting lead 7104 can be configured as shown in Fig. 62 and described hereinabove for the preceding embodiment.

Thus with this embodiment, the IC 7105 is mounted in flip-chip configuration on the substrate 7101, and is sealed using the sealing material 7304, which also functions as a dielectric layer, with the ground

pattern layer 7309 being formed over the sealing material 7304 and a microwave slot antenna 7109a formed in that ground pattern layer 7309, while in addition a second slot antenna 7109b is formed in the ground pattern layer 7103, on the opposite face of the IC card. Hence, an IC card can be realized which is thin in shape, and inexpensive to manufacture, and which provides the advantages described hereinabove for the preceding embodiment.

27th Embodiment

A 27th embodiment of the invention will be described referring to Fig. 64. This is a non-contact IC card which is shown in a cross-sectional view in elevation in Fig. 64.

In Fig. 64, 7401 is an antenna chip, having a slot aperture 7402 of a slot antenna and an antenna connecting lead portion 7403 formed thereon. The antenna chip is mounted on the substrate 7101 by means of bumps 7207. The term "antenna chip" is used herein with the significance of a device which is formed of a small block of a dielectric material, having a ground pattern layer 7404 formed on one face thereof with a slot aperture formed in that layer to function in conjunction with an antenna connecting lead portion as the microwave slot antenna 7402. Specifically, the

antenna chip of this embodiment has a plurality of bumps 7207 formed on the opposing face from the slot aperture, for attachment to the substrate 7101, a connecting lead 7403 formed on that opposite face and
5 connected via a bump 7207 to an antenna connecting lead portion 7404 formed on the upper face of the substrate 7101, and a through-hole connector 7405, for connecting the ground pattern layer 7404 (via a bump 7207 and a through-hole connector 7408 formed in the substrate
10 7101) to the ground pattern layer 7103.

This 27th embodiment differs from the 25th embodiment in that a slot antenna is formed on the antenna chip 7401, while in other respects the embodiment is substantially identical to the twenty-
15 fifth embodiment. In particular, the connecting lead portion 7403 formed on the antenna chip 7401 can be configured to constitute the two branches 7201a, 7201b of the antenna connecting lead 7104 shown in Fig. 62 for the first embodiment, while the connecting lead
20 7404 can be configured to constitute the common portion 7202 of that antenna connecting lead 7104, with the junction of the two branches being connected thereto via a bump 7207.

With this embodiment since an antenna is formed by
25 an antenna chip 401 which is mounted as a separate

component, there is the advantage that during mass-manufacture production of such IC cards, changes to the antenna in order to provide different characteristics can be easily performed, since only the antenna chip need be modified. In addition, there is the advantage that such an IC card can be manufactured at low cost. In other respects, the configuration, operation and advantages of this embodiment are similar to those described for the twenty-fifth embodiment.

28th Embodiment

A 28th embodiment of the invention will be described, which is a non-contact IC card that is shown in a cross-sectional view in elevation in Fig. 65.

This embodiment differs from the twenty-fifth embodiment shown in Fig. 61 in that respective dielectric films 7501a and 7501b are adhesively attached to the outer faces of the ground pattern layers 7103a, 710b respectively, thereby enabling the slots 7109a, 7109b of the respective slot antennas to be made smaller. In other respects this embodiment is identical to the twenty-fifth embodiment.

The configuration of the slot antennas 7109a, 7109b depends upon the frequency used for communication, and on the dielectric constant of the substrate on which the slot antenna is formed. For

example, in the case of an IC card that operates in the 2.45 GHz band, with the slot antenna being formed on a substrate which is made of polyamide having a dielectric constant of 3.4, the length of the slot must be approximately 40 mm. However with this embodiment, by adhesively attaching a polyimide film having a thickness of several micronmeters over each of the slot apertures, the slot length can be reduced to approximately 30 mm.

Thus with this embodiment, it becomes possible to reduce the overall size of an IC card.

29th Embodiment

A 29th embodiment of the invention will be described referring to Fig. 66. This is a general block diagram of the 29th embodiment, which is a non-contact IC card reader/writer system.

In Fig. 66, 7601 is a non-contact IC card, 7602 is an article having the IC card 7601 attached thereto, 7603 is an inquirer apparatus which functions as an IC card reader/writer apparatus. The IC card 7601 can have the configuration of any of the twenty-fifth, twenty-sixth, twenty-seventh or twenty-eighth embodiments of the invention described above. 7604 is a transmitting/receiving antenna for communication with the IC card 7601, 7607 is a circulator which is

connected to the transmitting/receiving antenna 7604, 7606 is a transmitting section which supplies a transmission signal to the transmitting/receiving antenna 7604, 7605 is a frequency synthesizer section formed of a VCO, etc., which generates a signal at the transmission frequency, 7608 is a demodulator which is connected to the circulator 7607, for demodulating a signal received from an IC card 7601. 7609 is a reader/writer apparatus control section which is connected to the transmitting section 7606, the receiving section 7608 and the frequency synthesizer section 7605.

The operation of the system having the above configuration is as follows. The IC card 7601 is attached to a article 7602, and has information relating to the article 7602 stored internally within an IC. The reader/writer apparatus 7603 is set up in a fixed location. When power is applied to the reader/writer apparatus 7603, the reader/writer apparatus control section 7609 controls the synthesizer section 7605 to produce a signal having a specific frequency, which is amplified by the transmitting section 7606 to a predetermined level and transferred through the circulator 7607 to the transmitting/receiving antenna 7604, to be transmitted.

When the IC card 7601 is moved to the vicinity of the transmitting/receiving antenna 7604, the signal from the reader/writer apparatus 7603 is received by the antenna of the IC card 7601 which is located on the side of the IC card 7601 that is not affixed to the article 7602. As described for the twenty-fifth embodiment, there is no deterioration of the communication performance due to the IC card 7601 being attached to the article 7602, so that it is not necessary to take into consideration the orientation of the IC card 7601 when attaching a card to an article, or to adjust the orientation of the article 7602 in relation to the transmitting/receiving antenna 7604.

30th Embodiment

A 30th embodiment of the invention will be described referring to Figs. 67A, 67B, and 68. This is a transponder which is a non-contact IC card, shown in a plan view and in a cross-sectional view in elevation in Figs. 67A and 67B respectively. Fig. 68 is a conceptual diagram to illustrate the operation of a mobile body discrimination system which incorporates IC cards having the configuration shown in Figs. 67A, 67B.

In Figs. 67A, 67B, 7703 is a ground pattern layer which is formed on the front face of a substrate 7707, 7705 is a co-planar antenna connecting lead, i.e.,

configured as a microstrip that has been formed on the substrate 7707 out of the same layer of electrically conductive material as the ground pattern layer 7703, extending from one of a plurality of bumps 7107 of the transponder IC 7105 to a slot aperture 7704 of a slot antenna. The slot aperture 7704 is configured, with this embodiment, as part of a region 7706 which has been cut out of the layer 7703, i.e., a region in which the upper face of the substrate is exposed, having the shape shown in Fig. 67A, with its narrowest portion located adjacent to the antenna connecting lead 7705.

The use of the co-planar connecting lead configuration serves to suppress any deterioration of the characteristics of the slot antenna 7704 which might otherwise result when the IC card is adhesively attached to an article, since the directivity of such an antenna is oriented parallel to the ground pattern layer 7703, i.e., to the side of the IC card, rather than perpendicular to a front or rear main face of the IC card.

In the mobile body discrimination system shown in Fig. 68, a transponder 7801 is a non-contact IC card having the configuration shown in Figs. 67A, 67B described above, and 7802 is an article having the IC card 7801 attached thereto. An IC card reader/writer

apparatus 7603 has the same configuration and functions as those of the reader/writer apparatus of the 27th embodiment shown in Fig. 66, i.e., functioning as an interrogator apparatus which can transmit data to and receive data from the IC cards.

The operation of the system having the above configuration is as follows. The IC card 7801 is attached to an article 7802, and has information relating to the article 7802 stored internally within the IC 7105 of the card. The reader/writer apparatus 7603 is set up in a fixed location. When the IC card 7801, attached to the article 7802, moves along the direction indicated by the arrows to the vicinity of the transmitting/receiving antenna 7604, the slot antenna 7604 receives a signal conveyed by microwave band radio waves which are transmitted from the reader/writer apparatus 7603, and a resultant received signal is transferred to the IC 7105 via the antenna connecting lead 7705.

Since the directivity of the slot antenna of the IC card 7801 is oriented parallel to the substrate 7707, it is not necessary for the article 7802 to be positioned such that a specific main face such as the front face of the IC card 7801 faces the transmitting/receiving antenna 7604 of the

reader/writer apparatus 7603 in order for the IC card to receive the radio waves from the antenna 7604 at a satisfactory level of received signal strength, since radio waves can still be received by the transponder antenna in a condition in which either of the main faces of the IC card is shielded from incident radio waves. Thus with this embodiment, a non-contact IC card system can be realized whereby such positioning is made unnecessary. Furthermore, since the non-contact IC card 7801 can be made extremely thin in shape, it could for example be attached to an article which is sent by mail.

Any of the above 25th to 28th and 30th embodiments of non-contact IC cards could be utilized to implement any of the preceding embodiments of transponders, such as those of Fig. 1, Fig. 11, etc., which utilize a single antenna. In that case, the function of that single antenna, such as the antenna 24 of the transponder 20 shown in Fig. 1, is performed jointly by a pair of slot antennas such as the pair of antennas 7109a, 7109b shown in Fig. 61. In the case of any of the preceding embodiments of transponders, such as those of Fig. 24 etc., which utilize a pair of antennas, the respectively functions of these antennas can be implemented by modifying any of the above 25th

to 28th embodiments to provide an additional pair of slot antennas on the opposing faces of the IC card, and an additional antenna connecting lead for coupling that pair of slot antennas to the transponder IC. In that case the two pairs of slot antennas will perform the respective functions, for example, of the two antennas 40, 41 shown in the circuit diagram of Fig. 24.

An example of this is shown in Fig. 69, which is a cross-sectional view of an IC card which is an alternative version of the 26th embodiment shown in Fig. 63, described above. With the IC card shown in Fig. 69, two pairs of slot apertures 7109a, 7109b and 7119a, 7119b are formed in the ground layers 7103, 7309, and these in conjunction with two antenna connecting leads 7104, 7114 (each having, for example, the configuration shown in Fig. 62) which are connected to the internal circuits of the integrated circuit chip 7105 via respective ones of the bumps 7107, constitute two pairs of slot antennas.

In this case, if for example both of the slot apertures 7109b, 7119b become shielded from incident radio waves (due to the face of the IC card containing these slot apertures being attached to some article), the functions of two antennas such as the antennas 40, 41 shown in Fig. 24 will continue to be performed, by

the two slot antennas formed by the slot apertures
7109a, 7119a in conjunction with the respective branch
portions of the antenna connecting leads 7104, 7114
(each of which could be configured as for the branch
5 portion 7201a shown in Fig. 62), so that satisfactory
operation of the transponder will be achieved.

Although the invention has been described in the
above referring to specific embodiments, it should be
understood that various modifications to these
10 embodiments, or combinations of various features of
embodiments, could be envisaged, which fall within the
scope claimed for the present invention.

WHAT IS CLAIMED IS:

1. A mobile body discrimination apparatus comprising a plurality of transponders and an interrogator apparatus, said interrogator apparatus having:

5 at least one antenna;

 control means;

 transmitting means controlled by said control means for driving said antenna to periodically transmit a transmission start command code conveyed by modulated radio waves, directed at respective ones of said transponders which are currently within a communication region of said antenna, and for transmitting CW (continuous-wave) radio waves in intervals between transmissions of said transmission start command code;

10

15 receiving means coupled to said antenna, for obtaining said requested signals from said transponders, conveyed by modulated reflected radio waves from said transponders which are within said communication region; and

20 each of said transponders having:

 an antenna;

 rectifier circuit means coupled to said antenna, for converting a signal received by said antenna to a supply of electrical power for operating respective circuits of said transponder;

25

receiving means coupled to said antenna, for obtaining said transmission start command code from said modulated radio waves transmitted by said interrogator apparatus;

5 memory means having data stored therein;

modulator means controllable for varying a reflection condition of said antenna with respect to incident radio waves; and

10 response timing control means responsive to reception of said transmission start command code by said receiving means for controlling said modulator means to vary said reflection condition of said antenna according to response data constituted by at least a part of said data of said memory means, to generate
15 modulated reflected radio waves conveying said response data after a specific delay time has elapsed following reception of said transmission start command code;

20 wherein said response timing control means comprises means for setting a randomly determined value of said delay time, at each reception of said transmission start command code.

2. The mobile body discrimination apparatus according to claim 1, wherein in said interrogator apparatus:

said at least one antenna comprises a first antenna and second antenna, and

said transmitting means includes first transmitting means controlled by said control means for driving said first antenna to periodically transmit said transmission start command code conveyed by modulated radio waves during and to transmit CW radio waves in intervals between said transmissions of said transmission start command code, and second transmitting means for driving said second antenna to transmit said CW radio waves;

wherein said control means includes means for periodically interrupting said transmission of said CW radio waves by said second transmitting means and second antenna, for the duration of each of respective time intervals in which said transmission start command code is transmitted by said first transmitting means and first antenna.

3. The mobile body discrimination apparatus according to claim 2, wherein a communication region of said first antenna and a communication region of said second antenna overlap one another to form a common communication region.

4. The mobile body discrimination apparatus according to claim 2, wherein said plurality of transponders move continuously or intermittently in a fixed direction along a fixed path, and wherein a communication region of said first antenna and a communication region of said second antenna are positioned such as to partially overlap one another, and are respectively located on said fixed path at a succeeding position and at a preceding position with respect to said fixed direction.

5. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 3, with said first and second antennas of said interrogator apparatus spaced apart at respective fixed locations, the system comprising:

conveyer belt transport means for transporting a plurality of load items along a fixed path in a fixed direction such as to pass through said common communication region of said first and second antennas, with each of said transponders being attached to a corresponding one of said load items and with at least a part of said data stored in said memory means of said

each transponder being data relating to said corresponding load item.

6. A mobile body discrimination system incorporating
5 an interrogator apparatus and a plurality of
transponders according to claim 3, the system including
transport means for transporting a plurality of load
items along a fixed path in a fixed direction such as
to pass through said common communication region of
10 said first and second antennas, with each of said
transponders being attached to a corresponding one of
said load items and with at least a part of said data
stored in said memory means of said each transponder
being data relating to said corresponding load item,
15 comprising:

a housing formed of a material which performs
shielding of electromagnetic waves and is formed with a
central aperture adapted to permit transfer of said
load items by said transport means through said central
20 aperture;

wherein said first antenna and second antenna are
attached within said housing, at respective positions
located on the periphery of said central aperture,
respectively oriented such as to form said common
25 communication region within said central aperture.

7. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 3, with said first and
5 second antennas of said interrogator apparatus spaced apart at respective fixed locations, the system comprising:

a plurality of transport vehicles controllable for transporting respective pluralities of load items along
10 a fixed path in a fixed direction such as to pass through said common communication region of said first and second antennas, with each of said transponders being attached to a corresponding one of said load items and with at least a part of said data stored in
15 said memory means of said each transponder being data relating to said corresponding load item.

8. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of
20 transponders according to claim 4, with said first and second antennas of said interrogator apparatus spaced apart at respective fixed locations, the system comprising:

conveyer belt transport means for transporting a
25 plurality of load items along a fixed path in a fixed

direction such as to pass first through said communication region of said second antenna then through said communication region of said first antenna, with each of said transponders being attached to a corresponding one of said load items and with at least a part of said data stored in said memory means of said each transponder being data relating to said corresponding load item.

9. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 4, the system including transport means for transporting a plurality of load items along a fixed path in a fixed direction such as to pass successively through said communication region of said second antenna then through said communication region of said first antenna, with each of said transponders being attached to a corresponding one of said load items and with at least a part of said data stored in said memory means of said each transponder being data relating to said corresponding load item, comprising:

a housing formed of a material which performs shielding of electromagnetic waves and is formed with a central aperture adapted to permit transfer of said

load items by said transport means through said central aperture;

wherein said first antenna and second antenna are attached within said housing, at positions on the periphery of said central aperture, respectively oriented such as to form said first communication region and second communication region within said central aperture.

10 10. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 4, with said first and second antennas of said interrogator apparatus spaced apart at respective fixed locations, the system comprising:

a plurality of transport vehicles controllable for transporting respective pluralities of load items along a fixed path in a fixed direction such as to pass successively through said communication region of said second antenna then through said communication region of said second antenna, with each of said transponders being attached to a corresponding one of said load items and with at least a part of said data stored in said memory means of said each transponder being data relating to said corresponding load item.

11. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 3, wherein:

5 said interrogator apparatus is adapted to be portable by an individual;

 said system comprises supporting means for supporting a plurality of articles on one side of a common vertical plane, with each of said transponders
10 being attached to a corresponding one of said articles and with at least a part of said data stored in said memory means of said each transponder being data relating to said corresponding article; and

 each of said transponders is oriented
15 substantially facing towards said common vertical plane, for thereby enabling said transponders to be successively scanned by manually orienting said antennas of said interrogator apparatus towards said transponders while moving said interrogator apparatus
20 in a direction parallel to said common vertical plane.

12. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 3, comprising:

supporting means for supporting a plurality of articles on one side of a common vertical plane, with each of said transponders being attached to a corresponding one of said articles and each of said transponders oriented substantially facing towards said common vertical plane, and with at least a part of said data stored in said memory means of said each transponder being data relating to said corresponding article; and

10 a movable supporting mechanism operable for moving said interrogator apparatus in directions parallel to said common vertical plane with said antennas of said interrogator apparatus oriented towards said common vertical plane, for thereby enabling said transponders to be successively scanned by said interrogator apparatus.

13. A mobile body discrimination system according to claim 12, comprising a computer system for automatically controlling said movement of said interrogator apparatus by said movable supporting mechanism.

14. The mobile body discrimination apparatus according to claim 1, wherein in said interrogator apparatus:

said at least one antenna comprises a first antenna and second antenna; said transmitting means includes first transmitting means controlled by said control means to periodically drive said first antenna to transmit modulated radio waves conveying a transmission start command code and to drive said first antenna to transmit spread spectrum radio waves which have been generated using a first pseudo-noise code sequence during intervals between transmitting said transmission start command code, and second transmitting means controlled by said control means to periodically drive said second antenna to transmit modulated radio waves conveying said transmission start command code, and to drive said second antenna to transmit spread spectrum radio waves which have been generated using a second pseudo-noise code sequence which is different from said first pseudo-noise code sequence, during intervals between transmitting said transmission start command code; and

said receiving means includes first receiving means coupled to said first antenna, for obtaining said requested signals from said transponders, conveyed by modulated reflected spread spectrum radio waves which have been transmitted by said first antenna, and second receiving means coupled to said second antenna, for

obtaining said requested signals from said transponders, conveyed by modulated reflected spread spectrum radio waves which have been transmitted by said second antenna.

5

15. The mobile body discrimination apparatus according to claim 14, wherein:

a communication region of said first antenna and a communication region of said second antenna are positioned such as to substantially entirely overlap one another to form a common communication region ; and

said interrogator apparatus further comprises comparator and selector means for comparing a signal received via said first antenna and first receiving means of said interrogator apparatus, conveying a set of data from one of said transponders, with a signal received via said second antenna and said second receiving means of said interrogator apparatus, conveying said set of data from said transponder, to judge that one of said signals is stronger than the other, and for selecting a set of data expressed by said stronger one of said signals to be stored in said memory means.

25

16. The mobile body discrimination apparatus according to claim 14, wherein:

5 said plurality of transponders move continuously or intermittently in a fixed direction along a fixed path, and wherein said first antenna and second antenna are located spaced apart from one another, with a communication region of said first antenna and a communication region of said second antenna positioned such as to partially overlap one another, and
10 respectively located in relation to said fixed path such that said communication region of said first antenna extends over a left-side portion of said path and said communication region of said second antenna extends over a right-side portion of said path; and

15 said control means of said interrogator apparatus comprises means for storing in said memory means a set of data conveyed by a first signal which is transmitted by a first one of said transponders and is received via said first antenna and first receiving means of said
20 interrogator apparatus, while also storing in said memory means of said interrogator apparatus a set of data conveyed by a second signal which is transmitted by a second one of said transponders and is received via said second antenna and second receiving means of
25 said interrogator apparatus entirely or partially

concurrently with said reception of said first signal from said first transponder.

17. The mobile body discrimination apparatus according to claim 14, wherein:

each of said transponders has stored in said memory means thereof a corresponding identification code, and said response timing control section controls said modulator means of said transponder to transmit said identification code together with said response data, by said modulated reflected radio waves;

each of said transponders comprises means for detecting reception of a transmission halt command code by said receiving means of said transponder and for inhibiting further operation of said modulation means of said transponder for a predetermined time duration following reception of said transmission halt command code;

said plurality of transponders move continuously or intermittently in a fixed direction along a fixed path, and wherein a communication region of said first antenna and a communication region of said second antenna are positioned such as to partially overlap one another, and are respectively located in relation to said fixed path such that all of said transponders

first pass through said communication region of said second antenna and the pass through said communication region of said first antenna; and

5 said control means of said interrogator apparatus comprises means for detecting that said response data and identification code have been successfully acquired from a transponder by said first receiving means or said second receiving means of said interrogator apparatus, and, when said successful acquisition has
10 been detected, for controlling at least one of said first transmitting means and second transmitting means of said interrogator apparatus to transmit said transmission halt command code together with the identification code of the one of said transponders
15 from which said response data was successfully acquired.

18. The mobile body discrimination apparatus according to claim 14, wherein said plurality of
20 transponders move continuously or intermittently in a fixed direction along a fixed path, and wherein a communication region of said first antenna and a communication region of said second antenna are positioned such as to partially overlap one another,
25 and are respectively located on said fixed path at a

succeeding position and at a preceding position with respect to said fixed direction, further comprising:

detector means located adjacent to said fixed path at a position preceding said communication region of said second antenna, for detecting transfer of successive numbers of said transponders along said fixed path and for producing signals indicative of said numbers; and

operation control means provided in said interrogator apparatus, responsive to said signals from said detector means for selectively enabling and inhibiting operation of at least a part of said second transmission means and second receiving means according to said numbers of transponders.

19. The mobile body discrimination apparatus according to claim 18, wherein said operation control means comprises power supply control means operable for selectively connecting and disconnecting a DC power supply of least a part of said second transmission means and second receiving means.

20. The mobile body discrimination apparatus according to claim 14 wherein said first antenna and second antenna are respectively spaced apart and oriented such

that respective communication regions of said first and second antennas partially overlap one another to form a common communication region, and wherein said interrogator apparatus comprises timing control means
5 for alternately establishing, in successive time intervals, a first condition in which said first transmission means of said interrogator apparatus is in operation and said second transmission means is inoperative and a second condition in which said first
10 transmission means is inoperative and said second transmission means is in operation.

21. The mobile body discrimination apparatus according to claim 14, wherein said first antenna is a polarizing
15 antenna having a first type of polarization and said second antenna is a polarizing antenna having a second type of polarization.

22. The mobile body discrimination apparatus according to claim 21, wherein said antenna of each of said
20 transponders is a polarizing antenna, and wherein in approximately half of said plurality of transponders said antenna has said first type of polarization and a remainder of said plurality of transponders has said
25 second type of polarization.

23. The mobile body discrimination apparatus according to claim 21, further comprising timing control means for alternately establishing, in
5 successive time intervals, a first condition in which said first transmission means is in operation and said second transmission means is inoperative and a second condition in which said first transmission means is inoperative and said second transmission means is in
10 operation.

24. A mobile body discrimination apparatus according to claim 21, wherein each of said transponders comprises a first transmitting/receiving system having:
15 a first polarizing antenna having said first type of polarization;

first receiving means coupled to said first polarizing antenna, for obtaining said transmission start command code from said modulated radio waves
20 transmitted by said interrogator apparatus;

first memory means having data stored therein;

first modulator means controllable for varying a reflection condition of said first polarizing antenna with respect to incident radio waves; and

first response timing control means responsive to reception of said transmission start command code by said first receiving means for controlling said modulator means to vary said reflection condition of said first polarizing antenna according to response data constituted by at least a part of said data of said first memory means, to generate modulated reflected radio waves conveying said response data after a specific delay time has elapsed following reception of said transmission start command code; and a second transmitting/receiving system comprising: a second polarizing antenna having said second type of polarization;

second receiving means coupled to said second polarizing antenna, for obtaining said transmission start command code from said modulated radio waves transmitted by said interrogator apparatus; second memory means having data stored therein;

second modulator means controllable for varying a reflection condition of said second polarizing antenna with respect to incident radio waves; and

second response timing control means responsive to reception of said transmission start command code by said second receiving means for controlling said second modulator means to vary said reflection condition of

5

10

25

said transponder is coupled to receive modulated radio signals from said first polarizing antenna and said modulator means of said transponder is coupled to said second polarizing antenna, for varying said reflection
5 condition of said antenna with respect to incident radio waves.

27. A mobile body discrimination apparatus according to claim 26, comprising first rectifier circuit means
10 coupled to said first polarizing antenna, for converting a signal received by said antenna to a supply of electrical power for operating at least a part of all circuits of said transponder, and second rectifier circuit means coupled to said second
15 polarizing antenna, for converting a signal received by said second polarizing antenna to a supply of electrical power for operating at least a part of all circuits of said transponder.

20 28. A mobile body discrimination apparatus according to claim 21, wherein each of said transponders comprises:

a first polarizing antenna having said first direction of polarization and a second polarizing
25 antenna having said second direction of polarization;

first rectifier circuit means coupled to said
first polarizing antenna, for converting a signal
received by said first polarizing antenna to a supply
of electrical power for operating at least a part of
5 all circuits of said transponder, and second rectifier
circuit means coupled to said second polarizing
antenna, for converting a signal received by said
second polarizing antenna to a supply of electrical
power for operating at least a part of all circuits of
10 said transponder;

first receiving means coupled to said first
polarizing antenna, for obtaining said transmission
start command code and supplying said transmission
start command code to said response timing control
15 means;

second receiving means coupled to said second
polarizing antenna, for obtaining said transmission
start command code and supplying said transmission
start command code to said response timing control
20 means;

first modulator means controllable for varying a
reflection condition of said first polarizing antenna,
and second modulator means controllable for varying a
reflection condition of said second polarizing antenna;
25 and

power comparison circuit means for judging which
of said first rectifier circuit means and second
rectifier circuit means is currently providing a higher
level of supply power, and for enabling operation of
5 the one of said first modulator means and second
modulator means which is coupled to the same one of
said first polarizing antenna and second polarizing
antenna as said rectifier circuit means which provides
the higher level of supply power while inhibiting
10 operation of the other one of said first modulator
means and second modulator means.

29. A mobile body discrimination apparatus according
to claim 21, wherein said first type of polarization is
15 a right-handed direction of circular polarization and
said second type of polarization is a left-handed
direction of circular polarization.

30. A mobile body discrimination system incorporating
20 an interrogator apparatus and a plurality of
transponders according to claim 20, with said first
antenna and second antenna of said interrogator
apparatus spaced apart at respective fixed locations,
the system comprising:

25

conveyer belt transport means for transporting a plurality of load items along a fixed path in a fixed direction such as to pass through said common communication region of said first and second antennas, with each of said transponders being attached to a corresponding one of said load items and with at least a part of said data stored in said memory means of said each transponder being data relating to said corresponding load item.

10

31. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 20, the system including transport means for transporting a plurality of load items along a fixed path in a fixed direction such as to pass through said common communication region of said first and second antennas, with each of said transponders being attached to a corresponding one of said load items and with at least a part of said data stored in said memory means of said each transponder being data relating to said corresponding load item, comprising:

15

a housing formed of a material which performs shielding of electromagnetic waves and is formed with a central aperture adapted to permit transfer of said

20
25

load items by said transport means through said central aperture;

wherein said first antenna and second antenna of said interrogator apparatus are attached within said housing, at respective positions located on the periphery of said central aperture, respectively oriented such as to form said common communication region within said central aperture.

32. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 20, with said first and second antenna of said interrogator apparatus spaced apart at respective fixed locations, the system comprising:

a plurality of transport vehicles controllable for transporting respective pluralities of load items along a fixed path in a fixed direction such as to pass through said common communication region of said first and second antennas, with each of said transponders being attached to a corresponding one of said load items and with at least a part of said data stored in said memory means of said each transponder being data relating to said corresponding load item.

33. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 20, wherein said interrogator apparatus is adapted to be portable by an individual, the system comprising supporting means for supporting a plurality of articles on one side of a common vertical plane, with each of said transponders being attached to a corresponding one of said articles and with at least a part of said data stored in said memory means of said each transponder being data relating to said corresponding article;

wherein each of said transponders is oriented substantially facing towards said common vertical plane, for thereby enabling said transponders to be successively scanned by manually orienting said antennas of said interrogator apparatus towards said transponders while moving said interrogator apparatus in a direction parallel to said common vertical plane.

34. A mobile body discrimination system incorporating an interrogator apparatus and a plurality of transponders according to claim 20, comprising:

supporting means for supporting a plurality of articles on one side of a common vertical plane, with each of said transponders being attached to a

corresponding one of said articles and each of said transponders oriented substantially facing towards said common vertical plane, and with at least a part of said data stored in said memory means of said each
5 transponder being data relating to said corresponding article; and

a movable supporting mechanism operable for moving said interrogator apparatus in directions parallel to said common vertical plane with said antennas of said
10 interrogator apparatus oriented towards said common vertical plane, for thereby successively scanning said transponders by said interrogator apparatus.

35. A mobile body discrimination apparatus according
15 to claim 1, wherein:

each of said transponders comprises modulator means having a plurality of absorber elements for applying respectively different degrees of absorption of said radio waves reflected by said antenna, response
20 timing control means, selection control means for generating a selection control signal which specifies an arbitrarily determined pair of said absorber elements, and absorber element selector means controlled by said selection control signal to select a
25 pair of said plurality of absorber elements each time

that said response start command code is obtained by
said receiving means, and for effecting said variation
of said reflection condition of said antenna by
selectively connecting the absorber elements

5 constituting said selected pair of absorber elements to
said antenna, to thereby perform amplitude modulation
of said reflected radio waves with a modulation depth
determined by said arbitrarily determined pair of
absorber elements; and

10 said interrogator apparatus comprises data
processing means for operating on an output signal
produced from said receiving means of said
interrogator apparatus for extracting, from said output
signal, respective sets of data which have been
15 transmitted by said transponders by modulation
utilizing said arbitrarily determined pairs of absorber
elements.

36. A mobile body discrimination apparatus according
20 to claim 35, wherein said selected pair of absorber
elements are arbitrarily determined by said selection
control means of said each transponder, and wherein
said data processing means of said interrogator
apparatus comprises means for separately extracting
25 respective sets of data which are received concurrently

by said receiving means of said interrogator apparatus
and have been transmitted by a plurality of said
transponders which select respectively different pairs
of said plurality of absorber elements to transmit the
5 corresponding data sets.

37. A mobile body discrimination apparatus according
to claim 1, wherein:

10 said modulator means of each of said transponders
comprises a first absorber element for applying a
minimum amount of absorption of said incident radio
waves, a second absorber element for applying a greater
amount of absorption of said incident radio waves than
said first absorber element, and a third absorber
15 element for applying a greater amount of absorption of
said incident radio waves than said second absorber
element, selection control means for generating a
selection control signal, and absorber element selector
means controlled by said selection control signal to
20 effecting either a first depth of amplitude modulation
of reflected radio waves by selectively coupling said
first and second absorber elements to said antenna of
said transponder or a second depth of amplitude
modulation of said reflected radio waves by selectively

coupling said first and third absorber elements to said antenna of the transponder; and

5 said interrogator apparatus comprises data processing means for operating on an output signal produced from said receiving means of said interrogator apparatus for extracting, from said output signal, respective sets of data which have been transmitted by said transponders by modulation through selective coupling of said first and second absorber elements to
10 said antenna of said transponder and sets of data which have been transmitted by modulation through selective coupling of said first and third absorber elements to said antenna of said transponder.

15 38. The mobile body discrimination system according to claim 37 wherein said selection by said absorber element selector means of amplitude modulation through selective coupling of said first and second absorber elements to said antenna of said transponder and
20 amplitude modulation through selective coupling of said first and third absorber elements to said antenna of said transponder is arbitrarily determined at each occurrence of data transmission by said transponder.

39. The mobile body discrimination system according to claim 38, wherein each of said transponders further comprises random number generating means controlled to generate a random number in response to each detection
5 of said response start command code by said response timing control means, and absorber element selection control means for operating on said absorber element selector means to determine that, in accordance with said random number, either said amplitude modulation
10 performed by selective coupling of said first and second absorber elements to said antenna of said transponder or said amplitude modulation which is performed by selective coupling of said first and third absorber elements to said antenna.

15
40. The mobile body discrimination system according to claim 37 wherein said selection control means of each of said transponders comprises means for determining that, when said response start command code is first
20 obtained by said receiving means of said transponder after said transponder has entered a communication region of said antenna of said interrogator apparatus, said amplitude modulation performed by selective coupling of said first and second absorber elements to
25 said antenna of said transponder is applied, to

transmit said response data by said modulated reflected radio waves, and that thereafter during at least a time duration for which said transponder remains within said communication region, said amplitude modulation
5 performed by selective coupling of said first and third absorber elements to said antenna of said transponder is applied, to transmit said response data by said modulated reflected radio waves.

10 41. The mobile body discrimination apparatus according to claim 37, wherein:

each of said transponders has stored in said memory means thereof an identification code, and said response timing control section controls said modulator
15 means of said transponder to transmit said identification code together with said response data, by said modulated reflected radio waves;

each of said transponders comprises means for detecting reception of a transmission halt command code
20 by said receiving means of said transponder and for inhibiting further operation of said modulation means of said transponder for a predetermined time duration following reception of said transmission halt command code; and

25

said control means of said interrogator apparatus comprises means for detecting that said response data and identification code have been successfully acquired from a transponder by said receiving means and data processing means of said interrogator apparatus, and, when said successful acquisition has been detected, for controlling at said transmitting means of said interrogator apparatus to transmit said transmission halt command code together with the identification code of the one of said transponders from which said response data was successfully acquired.

42. The mobile body discrimination apparatus according to claim 37, wherein said first, second and third absorber elements apply respective degrees of absorption of 0 db, 10 db and 20 dB.

43. The mobile body discrimination apparatus according to claim 37, wherein:

each of said transponders has stored in said memory means thereof an identification code, and said response timing control section controls said modulator means of said transponder to transmit said identification code together with said response data, by said modulated reflected radio waves;

5 said selection control means of said transponder determines that said amplitude modulation by selective coupling of said first and third absorber elements to said antenna of said transponder is applied by said modulator means when said identification code is being transmitted and that said amplitude modulation by selective coupling of said first and second absorber elements to said antenna of said transponder is applied by said modulator means when said response data are
10 being transmitted.

44. A mobile body discrimination apparatus according to claim 35 wherein:

15 each of said transponders has stored in said memory means thereof an identification code, and said response timing control section controls said modulator means of said transponder to transmit said identification code together with said response data, by said reflected phase-shifted radio waves;

20 each of said transponders comprises means for detecting reception of a transmission halt command code by said receiving means of said transponder and for inhibiting further operation of said modulation means of said transponder for a predetermined time duration

25

following reception of said transmission halt command code; and

5 said control means of said interrogator apparatus comprises means for detecting that said response data and identification code have been successfully acquired from a transponder by said receiving means and data processing means of said interrogator apparatus, and, when said successful acquisition has been detected, for controlling said transmitting means of said
10 interrogator apparatus to transmit said transmission halt command code together with the identification code of the one of said transponders from which said response data was successfully acquired.

15 45. A mobile body discrimination apparatus according to claim 44, wherein:

 said plurality of absorber elements of said each transponder comprises at least a first absorber element for applying a minimum amount of absorption of said
20 incident radio waves, a second absorber element for applying a greater amount of absorption of said incident radio waves than said first absorber element, and a third absorber element for applying a greater amount of absorption of said incident radio waves than
25 said second absorber element;

said selection control means of said transponder generates said selection control signal such that said first absorber element and third absorber element are selected to be applied in said amplitude modulation of said reflected radio waves when said identification code is being transmitted, and that said first absorber element and second absorber element are selected to be applied in said amplitude modulation of said reflected radio waves when said response data set is being transmitted.

46. A mobile body discrimination apparatus according to claim 45, wherein

each of said transponders comprises means for processing said response data set prior to transmission thereof, to generate data key information for use in extracting said response data set from a demodulated received signal, and for combining said data key information with said identification code of said transponder to constitute a header which is transmitted immediately prior to said response data set, in response to each said reception of said response start command code by said transponder, and wherein said first absorber element and third absorber element are selected to be applied in said amplitude modulation of

said reflected radio waves when said header is being transmitted; and

said data processing section of said interrogator apparatus comprises means for operating on said output
5 signal from said receiving means of said interrogator apparatus by applying said data key information of said header to correctly extract the contents of a corresponding response data set, when data conflict occurs within said output signal between said
10 corresponding response data set and a response data set which is transmitted by another one of said transponders.

47. A mobile body discrimination apparatus according
15 to claim 1, wherein:

said modulator means of each of said transponders comprises a plurality of phase shifter elements for applying respectively different degrees of phase shift to said radio waves which are reflected by said
20 antenna, phase shifter selection control means, and phase shifter element selector means controlled by said phase shifter selection control means to select a specific pair of said phase shifter elements each time that said response start command code is obtained by
25 said receiving means, and for effecting said variation

of said reflection condition of said antenna of said transponder by selectively coupling respective ones of said selected pair of phase shifter elements to said antenna of said transponder; and

5 said interrogator apparatus comprises data processing means for operating on an output signal produced from said receiving means of said interrogator apparatus to extract data which have been transmitted by said transponders by modulation utilizing said
10 selected pair of phase shifter elements.

48. The mobile body discrimination system according to claim 47 wherein said selection control means of each of said transponders comprises means for
15 determining that, when said response start command code is first obtained by said receiving means of said transponder after said transponder has entered a communication region of said antenna of said
20 interrogator apparatus, said phase modulation performed by selective coupling of said first and second phase shifter elements to said antenna of said transponder is applied, to transmit said response data by phase
25 modulation of said reflected radio waves, and that thereafter during at least a time duration for which said transponder remains within said communication

region, said phase modulation performed by selective coupling of said first and third phase shifter elements to said antenna of said transponder is applied, to transmit said response data by phase modulation of said reflected radio waves.

49. The mobile body discrimination apparatus according to claim 47, wherein:

each of said transponders has stored in said memory means thereof an identification code, and said response timing control section controls said modulator means of said transponder to transmit said identification code together with said response data, by said reflected phase-shifted radio waves;

each of said transponders comprises means for detecting reception of a transmission halt command code by said receiving means of said transponder and for inhibiting further operation of said modulation means of said transponder for a predetermined time duration following reception of said transmission halt command code; and

said control means of said interrogator apparatus comprises means for detecting that said response data and identification code have been successfully acquired from a transponder by said receiving means and data

processing means of said interrogator apparatus, and,
when said successful acquisition has been detected, for
controlling said transmitting means of said
interrogator apparatus to transmit said transmission
5 halt command code together with the identification code
of the one of said transponders from which said
response data was successfully acquired.

50. The mobile body discrimination apparatus according
10 to claim 47, wherein each of said transponders further
comprises attenuator insertion control means and said
modulator means of each of said transponders comprises
attenuator means controlled by said attenuator
insertion control means to selectively apply a fixed
15 amount of attenuation to said reflected phase-shifted
radio waves.

51. The mobile body discrimination system according to
claim 50 wherein said attenuator insertion control
20 means of each of said transponders comprises means for
determining that, when said response start command code
is first obtained by said receiving means of said
transponder after said transponder has entered a
communication region of said antenna of said
25 interrogator apparatus, said attenuator is applied to

effect attenuation of said phase-shifted reflected radio waves when data are transmitted by said transponder in response to said first reception of said response start command code, and that thereafter during
5 at least a time duration for which said transponder remains within said communication region, no attenuation is applied by said attenuator to said phase-shifted reflected radio waves.

10 52. A mobile body discrimination apparatus according to claim 1, wherein said rectifier circuit means includes a rectifier element, impedance matching means for transferring said signal received by said antenna to an input terminal of said rectifier element, and a
15 low-pass filter for smoothing a rectified output voltage produced at an output terminal of said rectifier element;

and wherein said rectifier circuit means comprises an impedance adjustment element which is coupled to at
20 least said input terminal of said rectifier element and is adjusted to optimize a degree of rectification efficiency of said rectifier circuit means, by applying compensation for a deviation of an impedance parameter of said rectifier element from a nominal predetermined
25 value of said parameter.

53. The mobile body discrimination apparatus according to claim 52, wherein said rectifier circuit means comprises means for supplying a fixed-amplitude test
5 signal to said impedance matching means in place of said signal from said antenna, for thereby performing said adjustment of said impedance adjustment element by setting said impedance adjustment element in a condition whereby a predetermined minimum level of
10 output power is available from said rectifier circuit means when said test signal is being supplied.

54. The mobile body discrimination apparatus according to claim 52, wherein said rectifier element is a diode,
15 said impedance parameter is a value of inter-terminal capacitance of said diode, and said impedance adjustment element is an adjustable capacitor which is connected in parallel with said input and output terminals of said diode.

20 55. The mobile body discrimination apparatus according to claim 54, wherein said diode is connected in series between said impedance matching means and said low-pass filter.

25

56. The mobile body discrimination apparatus according to claim 54, wherein said diode is connected in parallel between a junction point of said impedance matching means and low-pass filter and a ground potential of said rectifier circuit means.

57. The mobile body discrimination apparatus according to claim 54, wherein said diode is implemented as a component of an integrated circuit chip, wherein said integrated circuit chip is mounted in flip-chip configuration on a substrate, and said adjustable capacitor is implemented by a first electrically conductive region which is formed on said substrate and a second electrically conductive region which is disposed above and adjacent to said first conductive region and is adapted to be moved towards said first electrically conductive region by displacement of said integrated circuit chip towards said substrate.

58. The mobile body discrimination apparatus according to claim 57, wherein said first electrically conductive region is a conductive layer portion which is formed on said substrate directly below said integrated circuit chip, said second electrically conductive region is a conductive layer portion which

is formed on an outer face of said integrated circuit chip, said face being oriented opposing said first electrically conductive region, and wherein said adjustment is performed by applying force between said
5 integrated circuit chip and said substrate in a direction such as to displace said integrated circuit chip successively towards said substrate.

59. The mobile body discrimination apparatus
10 according to claim 52, wherein said rectifier element is a diode, said impedance parameter is a value of internal series inductance of said diode, and said impedance adjustment element is an adjustable inductor which is connected in parallel with said input and
15 output terminals of said diode, with respect to high-frequency signals.

60. The mobile body discrimination apparatus according to claim 59, wherein said diode is implemented as a
20 component of an integrated circuit chip wherein said integrated circuit chip is mounted in flip-chip configuration on a substrate, and said adjustable inductor is implemented by a patterned electrically conductive layer formed on said substrate, in the form
25 of an elongated connecting lead having a curved shape

such that a plurality of portions of said connecting lead are disposed adjacent to one another, and connection means attached to said integrated circuit chip and adapted to be brought into contact with
5 respective pairs of said separate portions, to thereby reduce an inductance value of said adjustable inductor, as a result of displacement of said integrated circuit chip towards said substrate.

10 61. The mobile body discrimination apparatus according to claim 60, wherein:

said shaped connecting lead is formed directly below said integrated circuit chip on said substrate;

15 said connection means comprises a plurality of protrusions formed of an electrically conductive material and of respectively different heights, disposed protruding from a lower face of said substrate towards said substrate and respectively positioned directly above corresponding ones of said portions of
20 the shaped connecting lead, and

said adjustment is performed by applying force between said integrated circuit chip and said substrate in a direction such as to displace said integrated circuit chip successively towards said substrate.

25

62. A mobile body discrimination apparatus according to claim 1, wherein said radio waves transmitted by said interrogator apparatus are in the microwave frequency range and wherein each of said transponders is structured as an IC (integrated circuit) card having a substrate with patterned connecting leads formed on an upper face thereof and an integrated circuit chip in bare chip condition, which constitutes respective internal circuits of said transponder and has a plurality of connector elements, which are respectively coupled to said internal circuits, formed thereon, said integrated circuit chip being mounted on said upper face of said substrate;

wherein said IC card comprises:

an antenna connecting lead constituted by a part of said patterned connecting leads, coupled through one of said connector elements to said internal circuits; and

first and second layers of electrically conductive material formed respectively formed on opposite sides of said IC card, having respective slot apertures formed therein, said slot apertures being located in a predetermined position relationship to specific portions of said antenna connecting lead to thereby constitute first and second slot antennas, with each of

said slot antennas functioning independently of the other one thereof as said antenna of said transponder.

63. A mobile body discrimination apparatus according
5 to claim 1, wherein said radio waves transmitted by
said interrogator apparatus are in the microwave
frequency range and wherein each of said transponders
is structured as an IC (integrated circuit) card having
a first substrate with patterned connecting leads
10 (formed on an upper face thereof and an integrated
circuit chip in bare chip condition, which constitutes
respective internal circuits of said transponder and
has a plurality of connector elements, which are
respectively coupled to said internal circuits, formed
15 thereon, said integrated circuit chip being mounted on
said upper face of said first substrate, said IC card
comprising:

an antenna connecting lead formed as part of said
patterned connecting leads, having a first branch
20 portion and a second branch portion which respectively
extend from a junction thereof, each of said first and
second branch portions having a length that is
determined in accordance with a wavelength of said
radio waves transmitted by said interrogator apparatus,
25 and with said antenna connecting lead having a common

portion which extends between said junction and one of said connector elements;

a second substrate formed with an aperture for accommodating said integrated circuit chip and having a lower face thereof fixedly attached to said upper face of said first substrate;

a first layer of electrically conductive material formed over a lower face of said first substrate, having a first slot aperture formed therein, with said first slot aperture located directly over a part of said first branch portion of said antenna connecting lead;

a second layer of electrically conductive material formed over an upper face of said second substrate, having a second slot aperture formed therein, with said second slot aperture located directly above a part of said second branch portion of said antenna connecting lead; and

connection means coupled to one of said connector elements and to each of said first layer of electrically conductive material and second layer of electrically conductive material, for connecting each of said layers to a ground potential of said internal circuits of said transponder;

wherein said first slot aperture in conjunction with said first branch portion of the antenna connecting lead constitutes a first slot antenna and said second slot aperture in conjunction with said second branch portion of the antenna connecting lead constitutes a second slot antenna, whereby each of said first and second slot antennas implements the functions of said antenna of said transponder independently of the other one of said first and second slot antennas.

10

64. The transponder for a mobile body discrimination apparatus according to claim 63, further comprising a first layer of a dielectric material formed over said first layer of electrically conductive material and a second layer of a dielectric material formed over said second layer of electrically conductive material, with said first and second layers of dielectric material respectively covering said first and second slot apertures.

20

65. A mobile body discrimination apparatus according to claim 1, wherein said radio waves transmitted by said interrogator apparatus are in the microwave frequency range and wherein each of said transponders is structured as an IC (integrated circuit) card having

25

a first substrate with patterned connecting leads
formed on an upper face thereof and an integrated
circuit chip in bare chip condition, which constitutes
respective internal circuits of said transponder and
5 has a plurality of connector elements, which are
respectively coupled to said internal circuits, formed
thereon, said integrated circuit chip being mounted on
said upper face of said first substrate;

wherein said integrated circuit chip is
10 manufactured with a ground connecting layer of
electrically conductive material, connected to a ground
potential of said internal circuits, formed over at
least a part of a face of said integrated circuit chip
that is opposite to a face which supports said
15 connector elements, and

said IC card comprises:

an antenna connecting lead formed as part of said
patterned connecting leads, having a first branch
portion and a second branch portion which respectively
20 extend from a junction thereof, each of said first and
second branch portions having a length that is
determined in accordance with a wavelength of said
radio waves transmitted by said interrogator apparatus,
and with said antenna connecting lead having a common

portion which extends between said junction and one of said connector elements;

a layer of electrically insulating sealing material formed upon said upper face of said substrate surrounding said integrated circuit chip while leaving
5 at least a part of said ground connecting layer uncovered by said layer of sealing material;

a first layer of electrically conductive material formed over a lower face of said first substrate,
10 having a first slot aperture formed therein, located such as to extend directly below a part of said first branch portion of said antenna connecting lead;

a second layer of electrically conductive material formed over an upper face of said layer of electrically
15 insulating sealing material and said ground connecting layer, having a second slot aperture formed therein, with said second slot aperture located such as to extend directly above a part of said second branch portion of said antenna connecting lead; and

20 connection means coupled to one of said connector elements and to said first layer of electrically conductive material, for connecting said layer to said ground potential;

wherein said first slot aperture in conjunction
25 with said first branch portion of the antenna

connecting lead constitutes a first slot antenna and said second slot aperture in conjunction with said second branch portion of the antenna connecting lead constitutes a second slot antenna, whereby either one
5 of said first and second slot antennas can implement the functions of said antenna of said transponder independently of the other one of said first and second slot antennas.

10 66. The transponder for a mobile body discrimination apparatus according to claim 61, further comprising a first layer of a dielectric material formed over said first layer of electrically conductive material and a second layer of a dielectric material formed over said
15 second layer of electrically conductive material, with said first and second layers of dielectric material respectively covering said first and second slot apertures.

20 67. A mobile body discrimination apparatus according to claim 1, wherein said radio waves transmitted by said interrogator apparatus are in the microwave frequency range and wherein each of said transponders is structured as an IC (integrated circuit) card having
25 a substrate with patterned connecting leads formed on

an upper face thereof and an integrated circuit chip in bare chip condition, which constitutes respective circuits of said transponder and has a plurality of connector elements, which are respectively coupled to
5 said internal circuits, formed thereon, said integrated circuit chip being mounted on said upper face of said substrate;

wherein said IC card comprises:

an antenna chip formed of a block of dielectric
10 material with planar upper and lower faces, mounted on said upper face of said substrate, with a layer of electrically conductive material having a slot aperture formed therein and connected to a ground potential of internal circuits of said integrated circuit chip,
15 formed over said upper face of said block;

an antenna connecting lead, having a first portion formed on said lower face of said antenna chip and a second portion formed on said upper face of said substrate, coupled through one of said connector
20 elements to said internal circuits; and

a layer of electrically conductive material formed over a lower face of said substrate and connected to said ground potential, having a slot aperture formed therein;

wherein said slot apertures are located in a predetermined position relationship to respective portions of said antenna connecting lead to thereby constitute respective slot antennas, and each of said slot antennas is configured to function independently of the other one thereof as said antenna of said transponder.

68. A mobile body discrimination apparatus according to claim 1, wherein said radio waves transmitted by said interrogator apparatus are in the microwave frequency range and wherein each of said transponders is structured as an IC (integrated circuit) card having a first substrate with patterned connecting leads formed on an upper face thereof and an integrated circuit chip in bare chip condition, which constitutes respective internal circuits of said transponder and has a plurality of connector elements, respectively coupled to said internal circuits, formed thereon, said integrated circuit chip being mounted on said upper face of said first substrate;

wherein said IC card comprises:

an antenna chip formed of a block of dielectric material mounted on said upper face of said substrate, said antenna chip being shaped with planar upper and

lower faces and having a first layer of electrically
conductive material formed on said upper face thereof
and a plurality of connector elements attached to said
lower face thereof, said first layer of electrically
5 conductive material having a first slot aperture formed
therein, and patterned connecting leads formed on said
lower face of said block to constitute a first branch
portion and a second branch portion of an antenna
connecting lead, with said first and second branch
10 portions extending from a junction thereof which is
coupled to a first one of said connector elements and
said first branch portion positioned with a part
thereof disposed directly below said first slot
aperture, each of said first and second branch portions
15 having a length that is determined in accordance with a
wavelength of said radio waves transmitted by said
interrogator apparatus;

a common portion of said antenna connecting lead,
formed on said upper face of said substrate to connect
20 said first connector element of said antenna chip to
one of said connector elements of said integrated
circuit chip;

a second layer of electrically conductive
material, formed over a lower face of said substrate,
25 having a second slot aperture formed therein, with said

second slot aperture positioned directly over a part of said second branch portion of said antenna connecting lead;

first through-hole connection means formed in said
5 substrate, coupled to one of said connector elements and to said first layer of electrically conductive material, for connecting said layer to said ground potential; and

second through-hole connecting means formed in
10 said substrate, and third through-hole connecting means formed in said block of dielectric material, disposed to electrically interconnect said first layer of electrically conductive material of said antenna chip and said second layer of electrically conductive
15 material of said substrate via one of said connector elements of said antenna chip;

wherein said first slot aperture in conjunction with said first branch portion of the antenna connecting lead constitutes a first slot antenna and
20 said second slot aperture in conjunction with said second branch portion of the antenna connecting lead constitutes a second slot antenna, whereby either one of said first and second slot antennas can implement the functions of said antenna of said transponder

independently of the other one of said first and second slot antennas

69. A mobile body discrimination apparatus according
5 to claim 1, wherein said radio waves transmitted by
said interrogator apparatus are in the microwave
frequency range and wherein each of said transponders
is structured as an IC (integrated circuit) card having
a substrate and an integrated circuit chip which
10 constitutes respective internal circuits of said
transponder and has a plurality of connector elements,
which are respectively coupled to said internal
circuits, formed thereon, said integrated circuit chip
being mounted in bare chip form on an upper face of
15 said substrate;

wherein said IC card comprises:

first and second portions of a patterned layer of
electrically conductive material formed over said upper
face of said substrate, said first portion connected to
20 said internal circuits and shaped to constitute a co-
planar antenna connecting lead of a slot antenna, and
said second portion connected to a ground potential of
said internal circuits and shaped with a cut-out
portion which extends to an edge of said upper face, to

25

constitute said slot antenna in conjunction with said antenna connecting lead;

whereby said slot antenna has a directivity oriented parallel to said upper face of said substrate.

5

70. A mobile body discrimination apparatus according to claim 1, wherein said radio waves transmitted by said interrogator apparatus are in the microwave frequency range and wherein each of said transponders is structured as an IC (integrated circuit) card having a substrate and an integrated circuit chip which constitutes respective internal circuits of said transponder and has a plurality of connector elements formed thereon, with respective ones of said connector elements coupled to said internal circuits, with said integrated circuit chip being mounted in bare chip form on an upper face of said substrate;

10

15

wherein said IC card comprises:

a first portion of a patterned layer of electrically conductive material that is formed over said upper face of said substrate, said first portion being connected via at least one of said connector elements to a ground potential of said internal circuits and formed with a shaped cut-out region, said

20

25

shaped region extending to an outer edge of said upper face; and

a second portion of said patterned layer of electrically conductive material, extending from said integrated circuit chip to a position adjacent to said shaped region, shaped to function as a co-planar antenna connecting lead of a slot antenna, and connected at one end thereof via one of said connector elements to said internal circuits of said transponder; said cut-out portion and said co-planar antenna connecting lead having respective shapes and dimensions determined in accordance with a wavelength of said microwave radio waves such as to constitute said slot antenna.

ABSTRACT OF THE DISCLOSURE

In a mobile body discrimination apparatus having an interrogator apparatus and a plurality of transponders each capable of transmitting information to the
5 interrogator apparatus by modulation of radio waves that are reflected from a transponder antenna, which can be attached to respective articles, store data concerning the articles, and transmit the data to the interrogator apparatus in response to a command signal
10 transmitted while the transponder traverses a communication region of an antenna of the interrogator apparatus, each transponder is configured to begin sending such response data after a randomly determined time interval following reception of the command
15 signal, thereby reducing the probability of data conflict when plural transponders are within the communication region. In addition, radio waves from a second antenna of the interrogator apparatus are directed into that communication region in the
20 intervals between transmissions of the command signal, thereby increasing the power level of radio waves that are reflected by a transponder antenna or used by a rectifier circuit to supply power for operating the transponder circuits.

FIG. 1

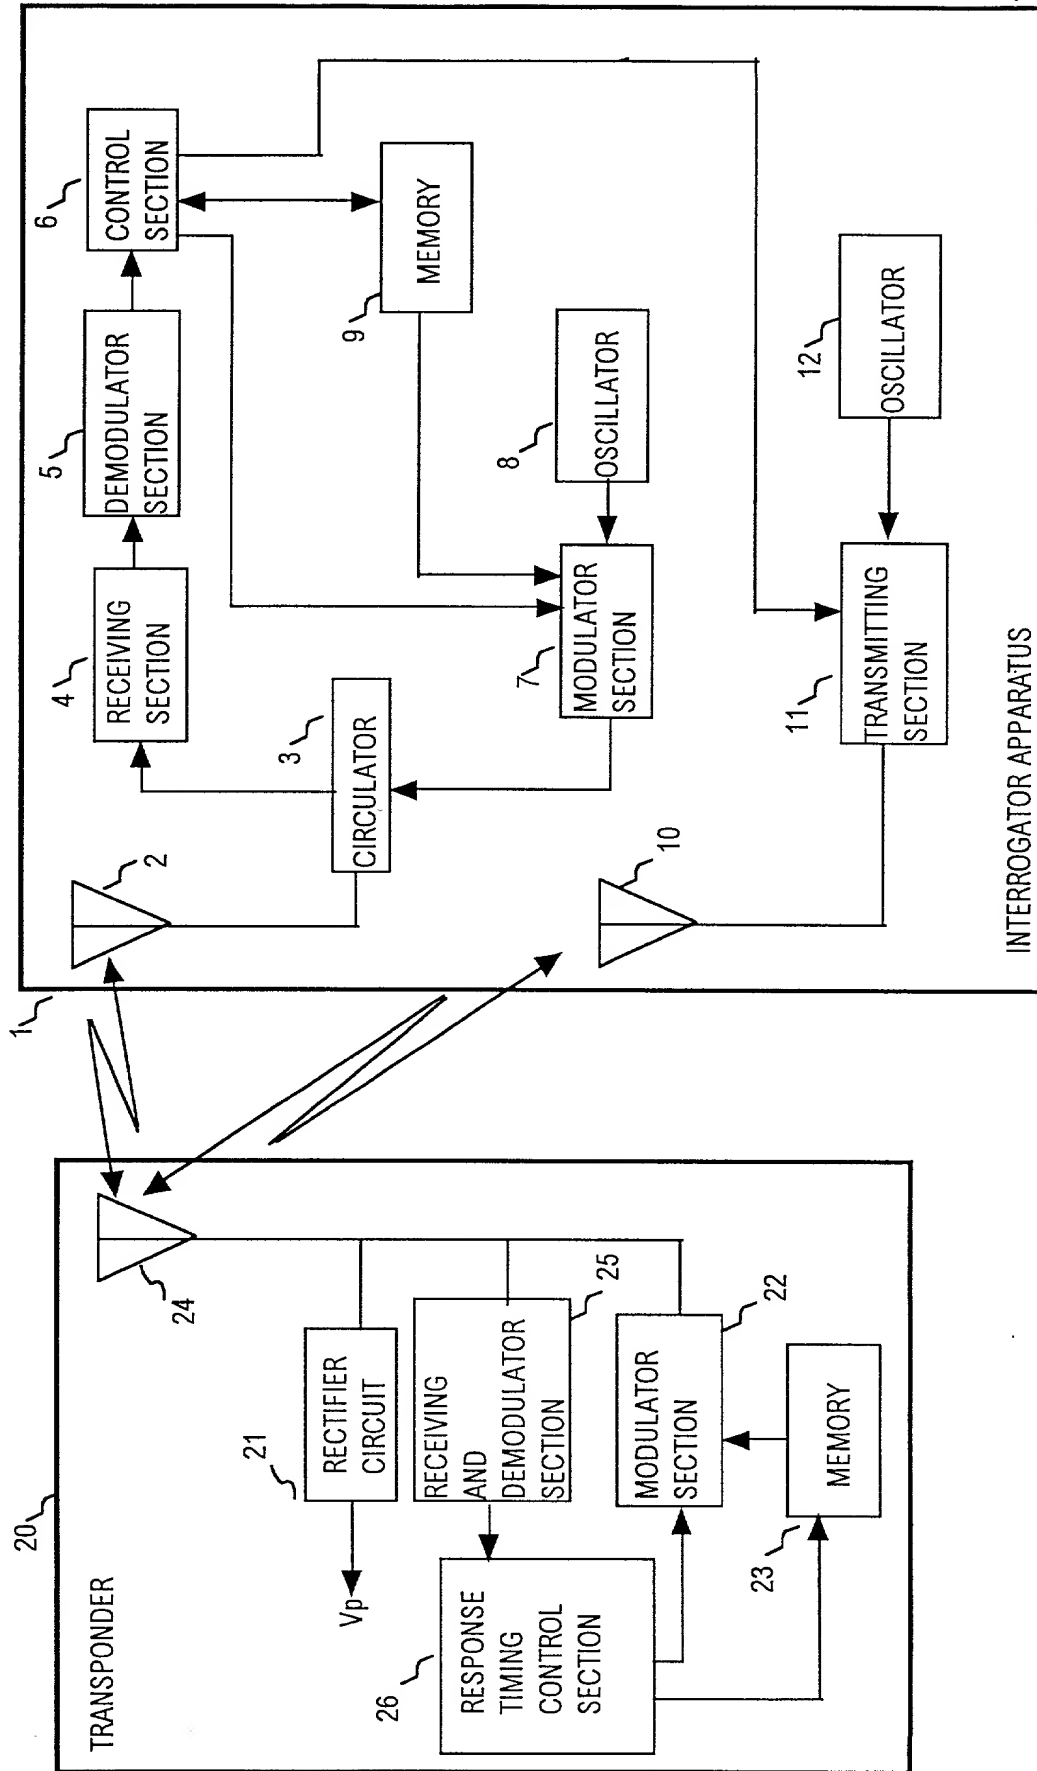


FIG. 2

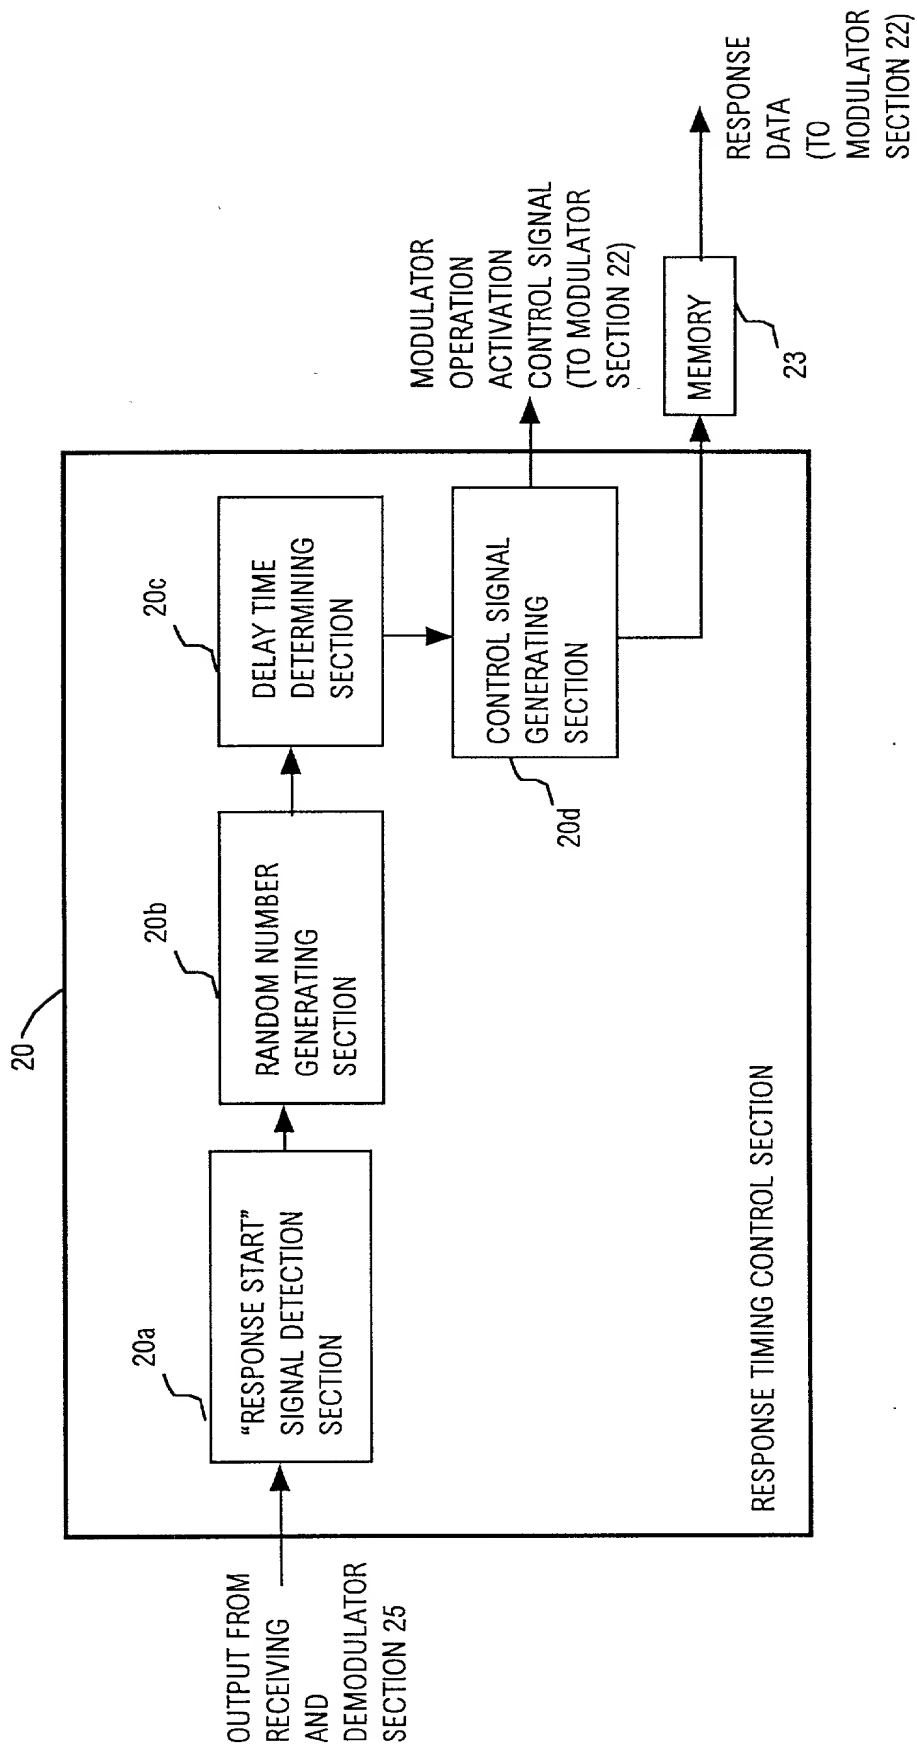


FIG. 3

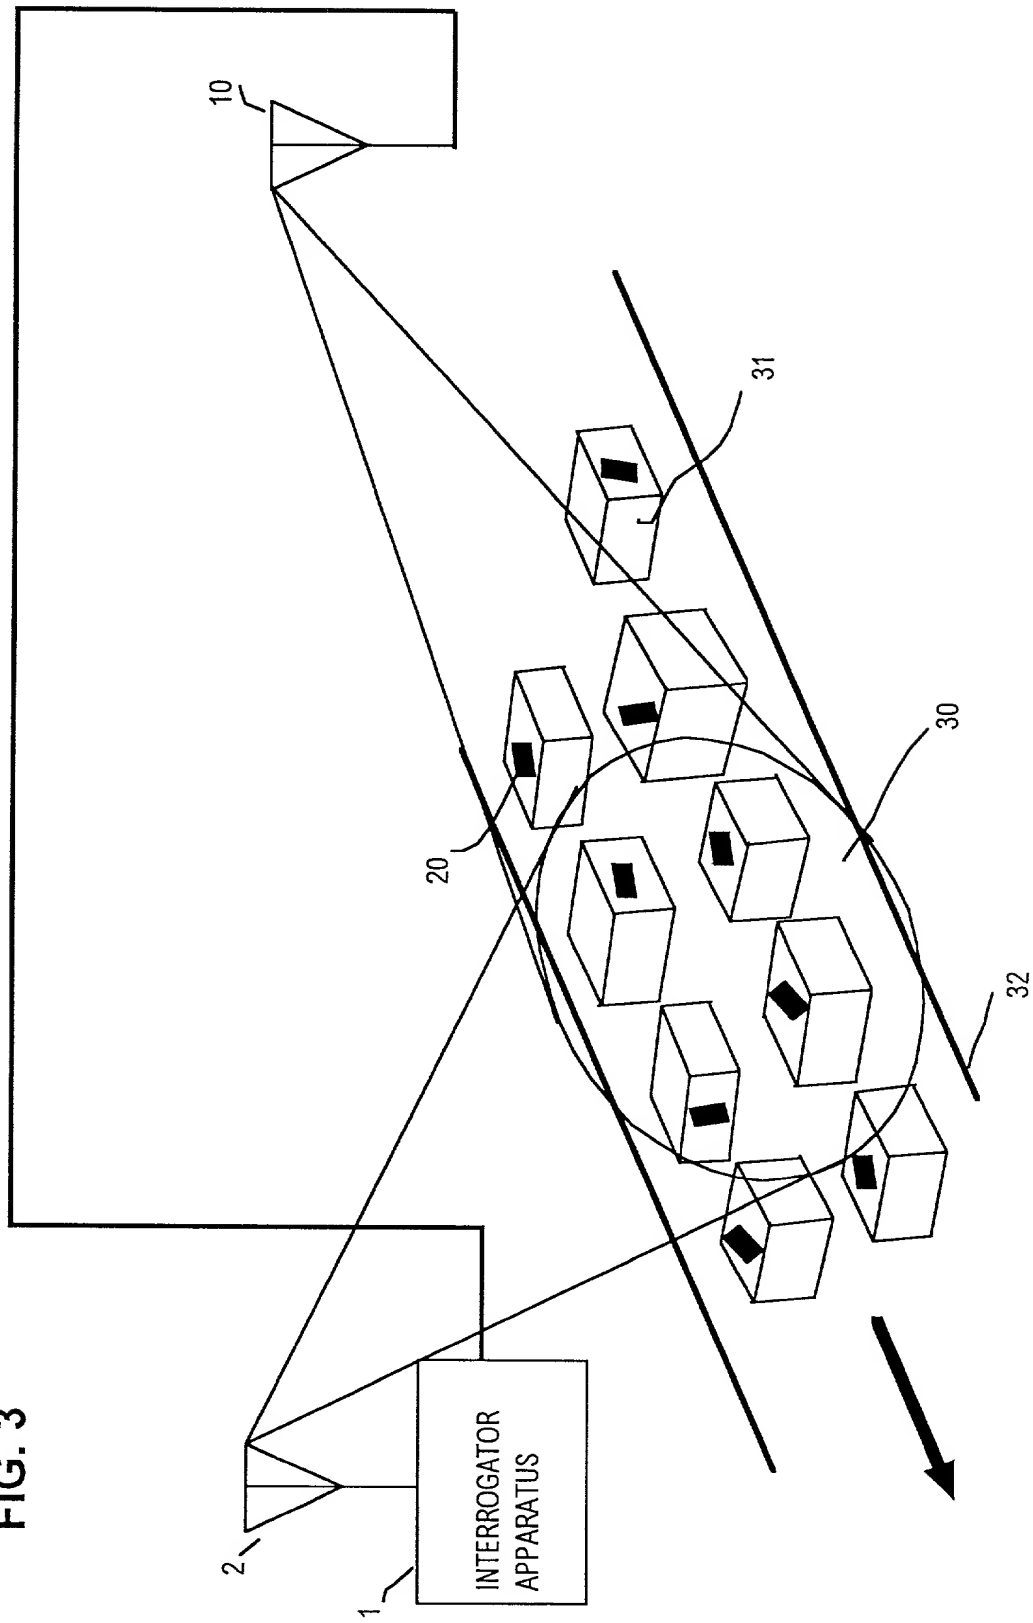


FIG. 4

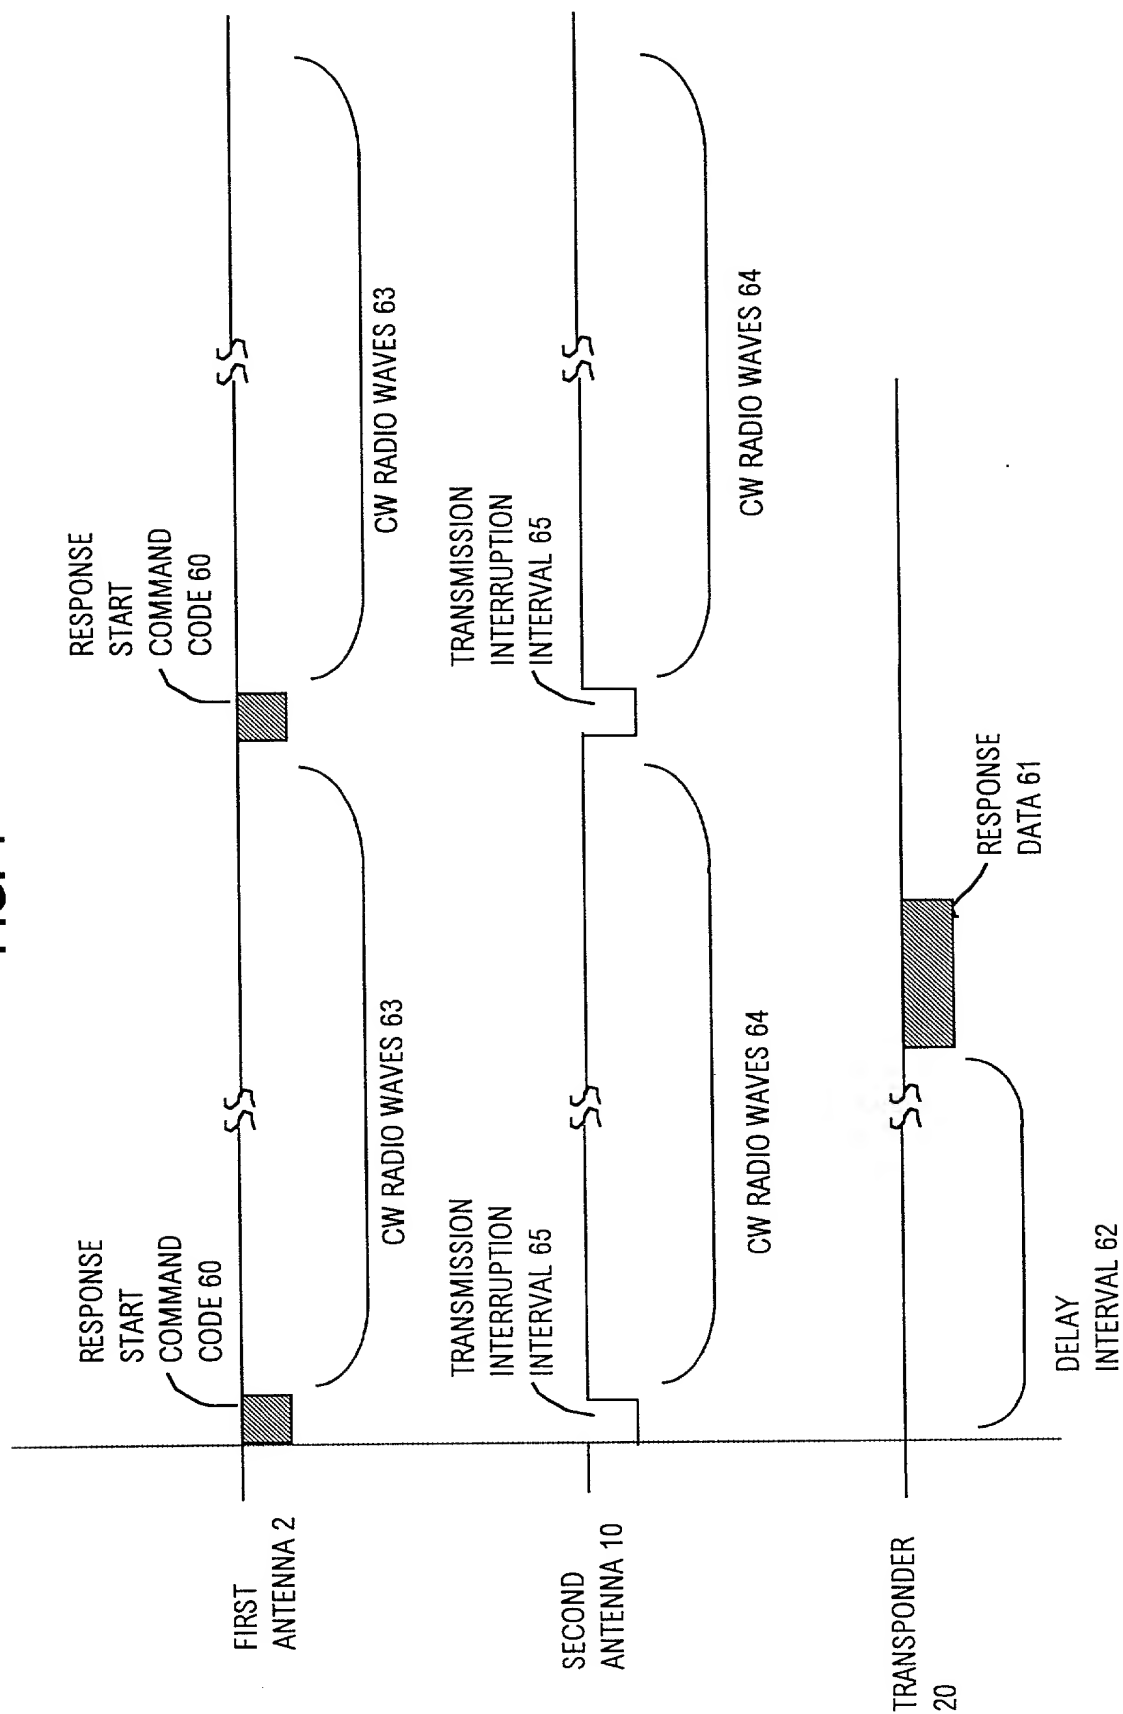


FIG. 5

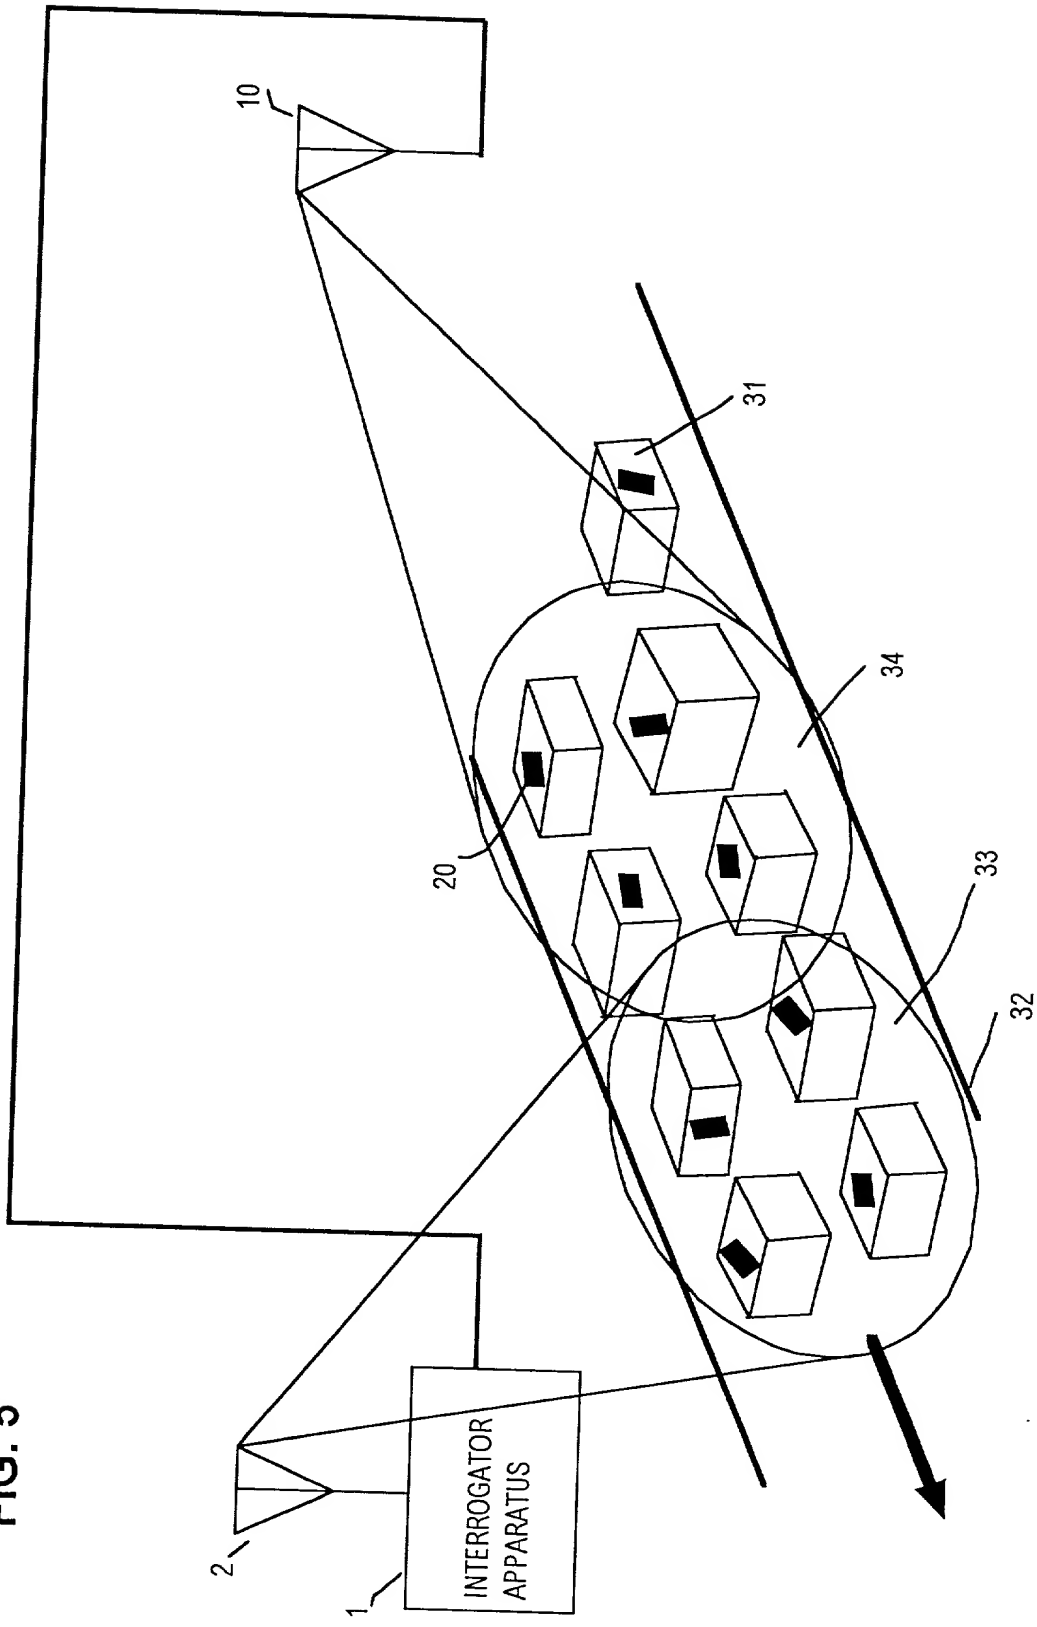


FIG. 6

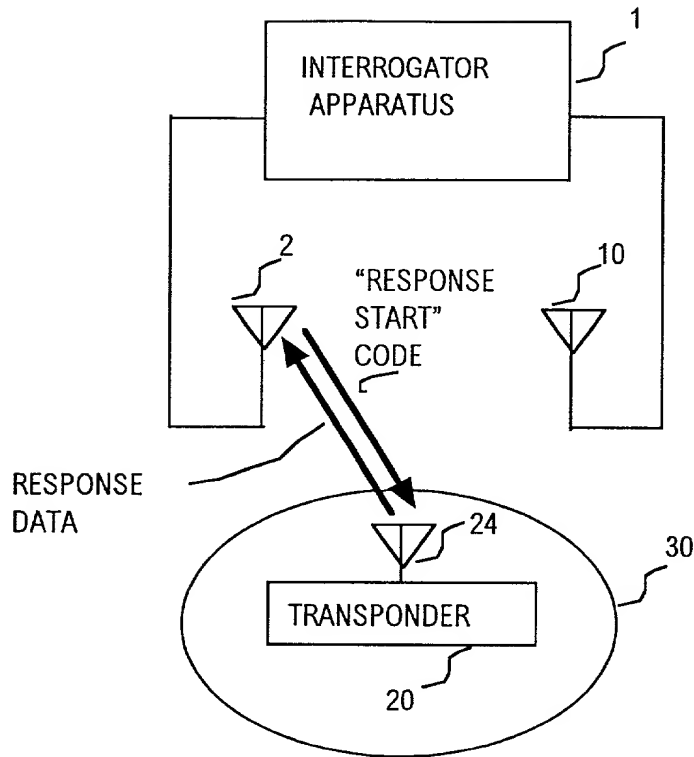


FIG. 7

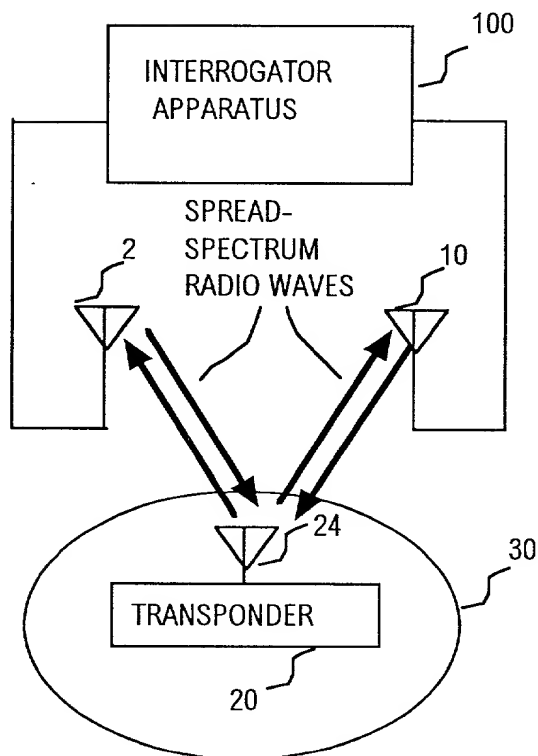


FIG. 8

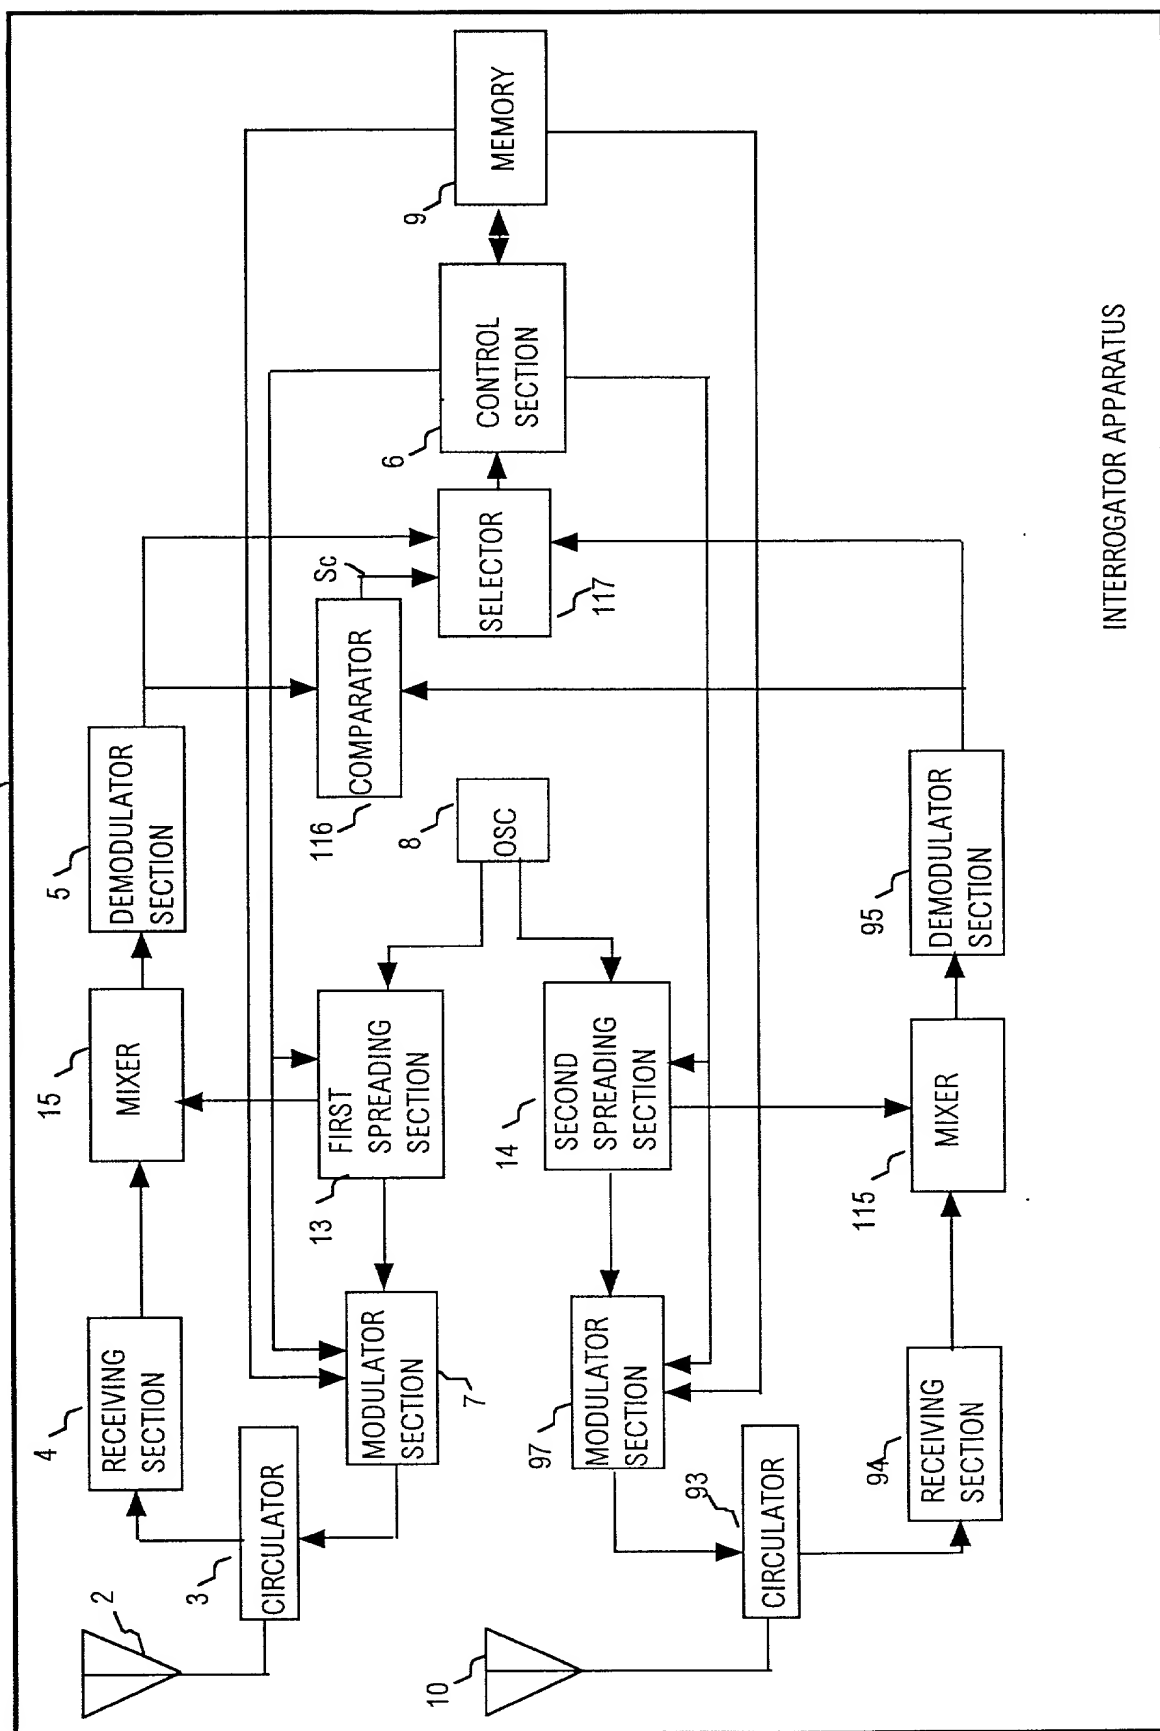


FIG. 9


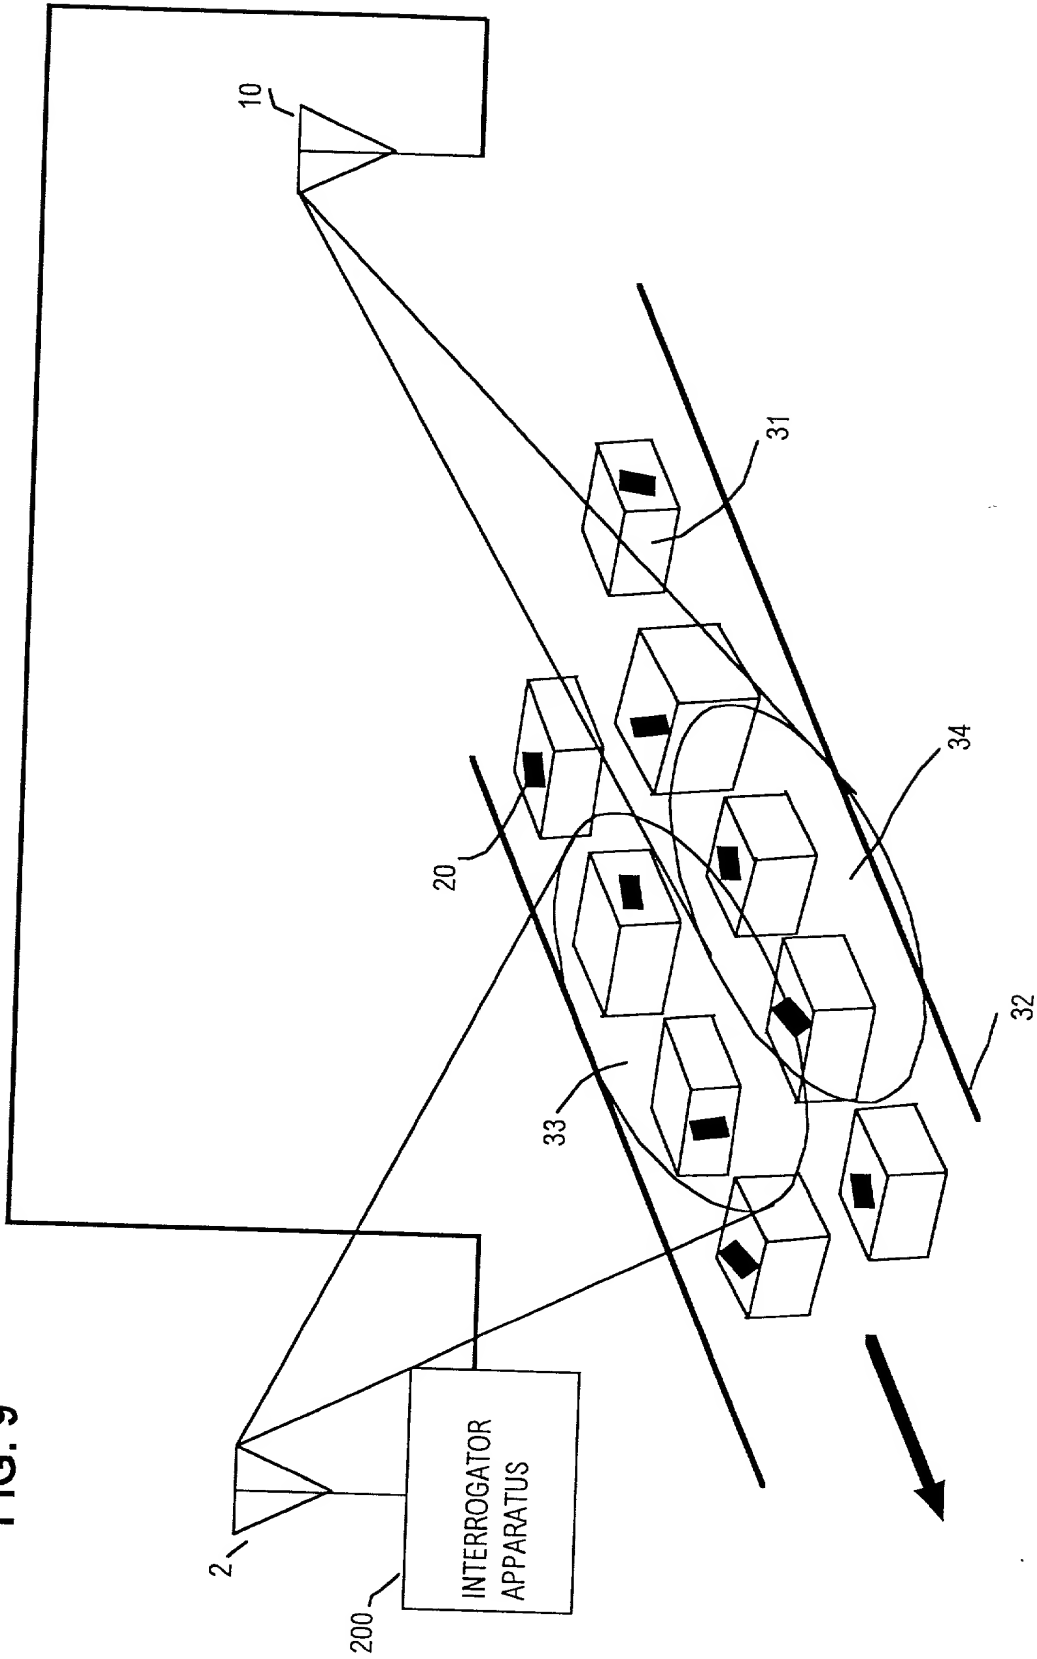



FIG. 10

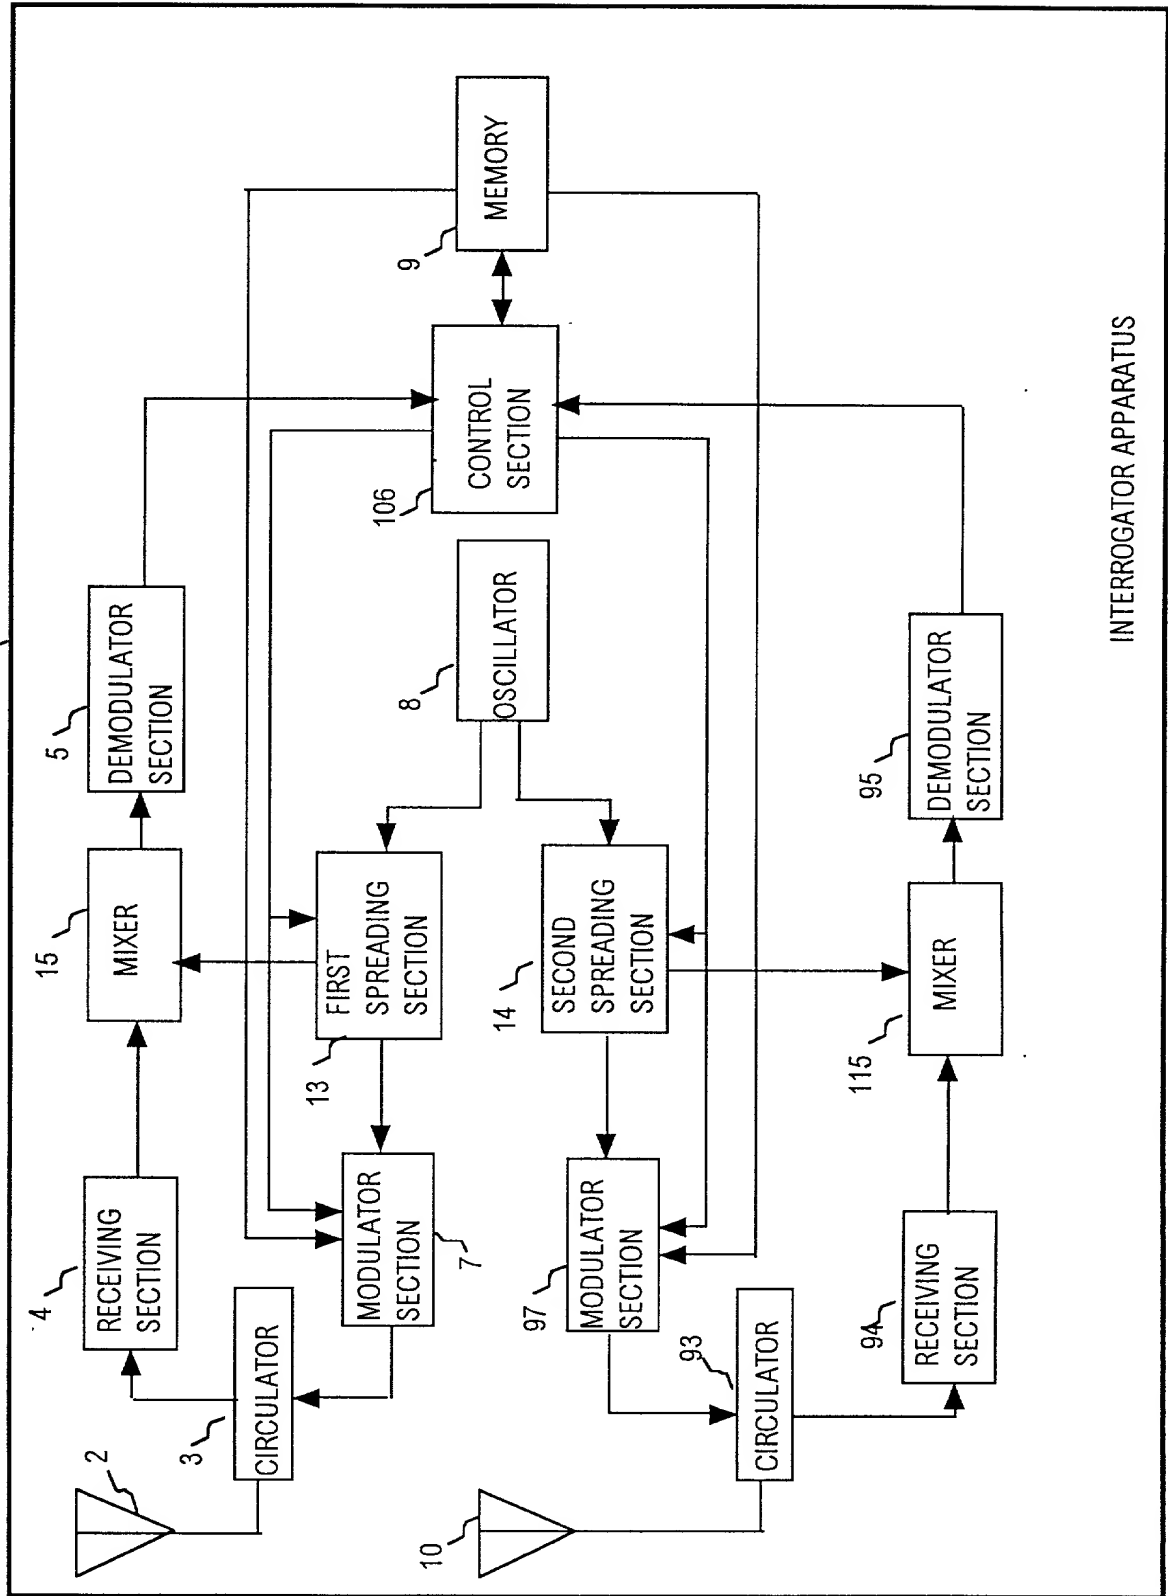

INTERROGATOR APPARATUS


10/68

FIG. 11

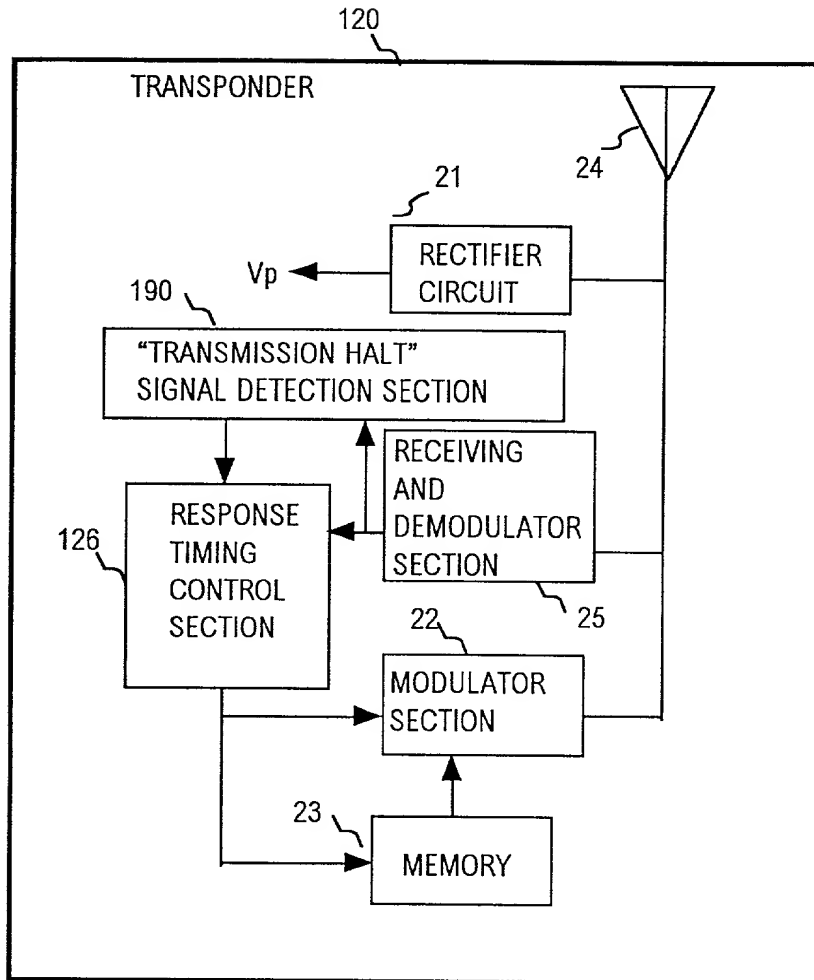


11/68

FIG. 12

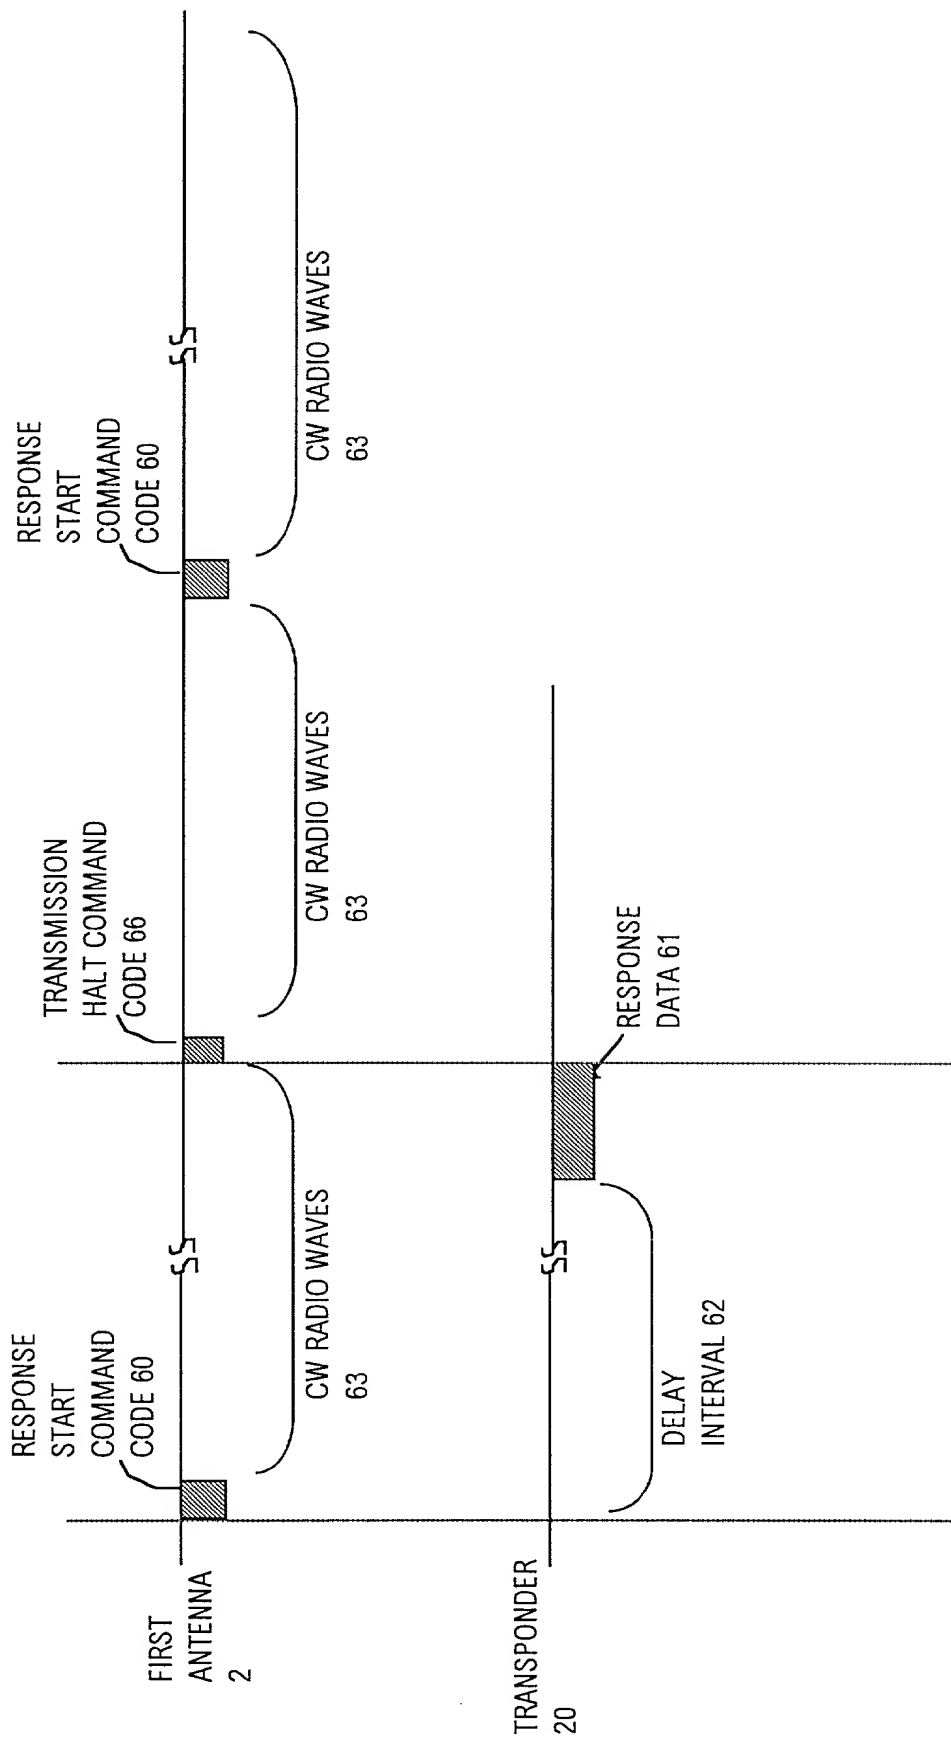

12/68

FIG. 13

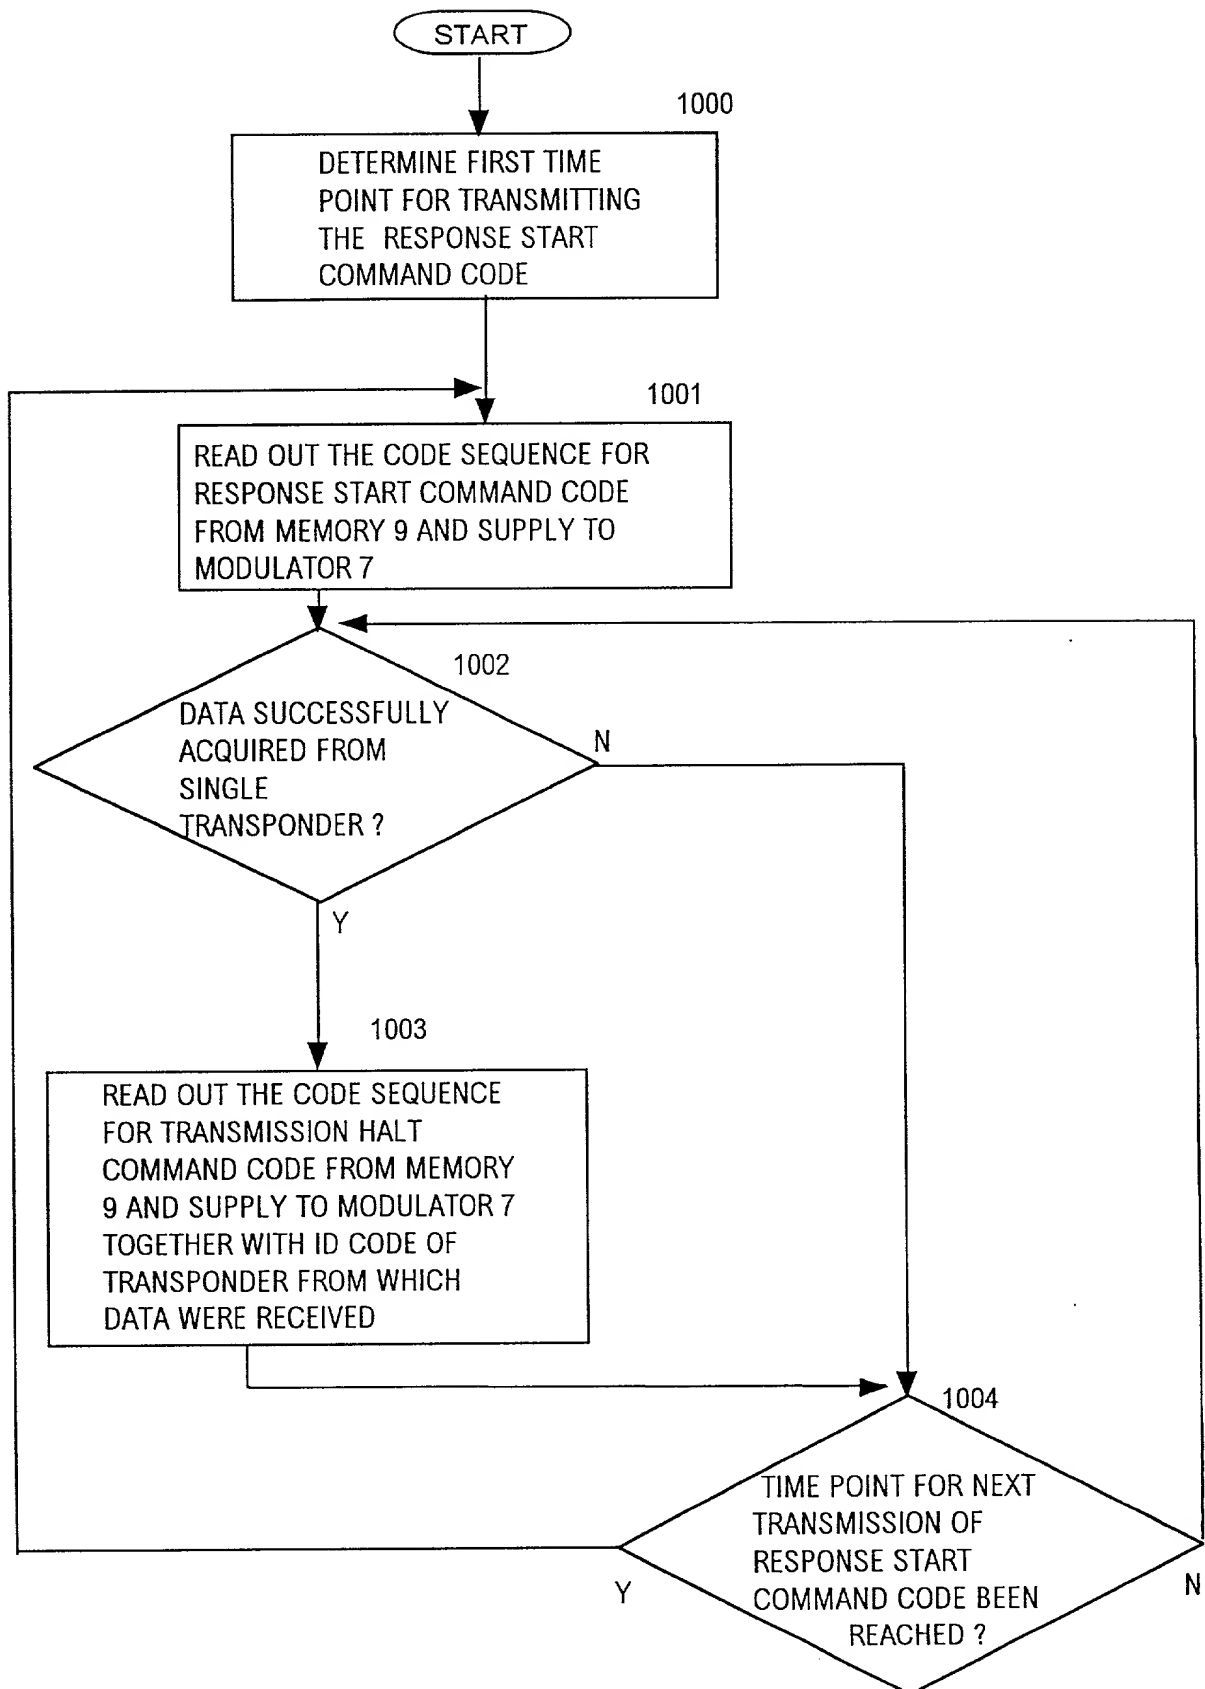

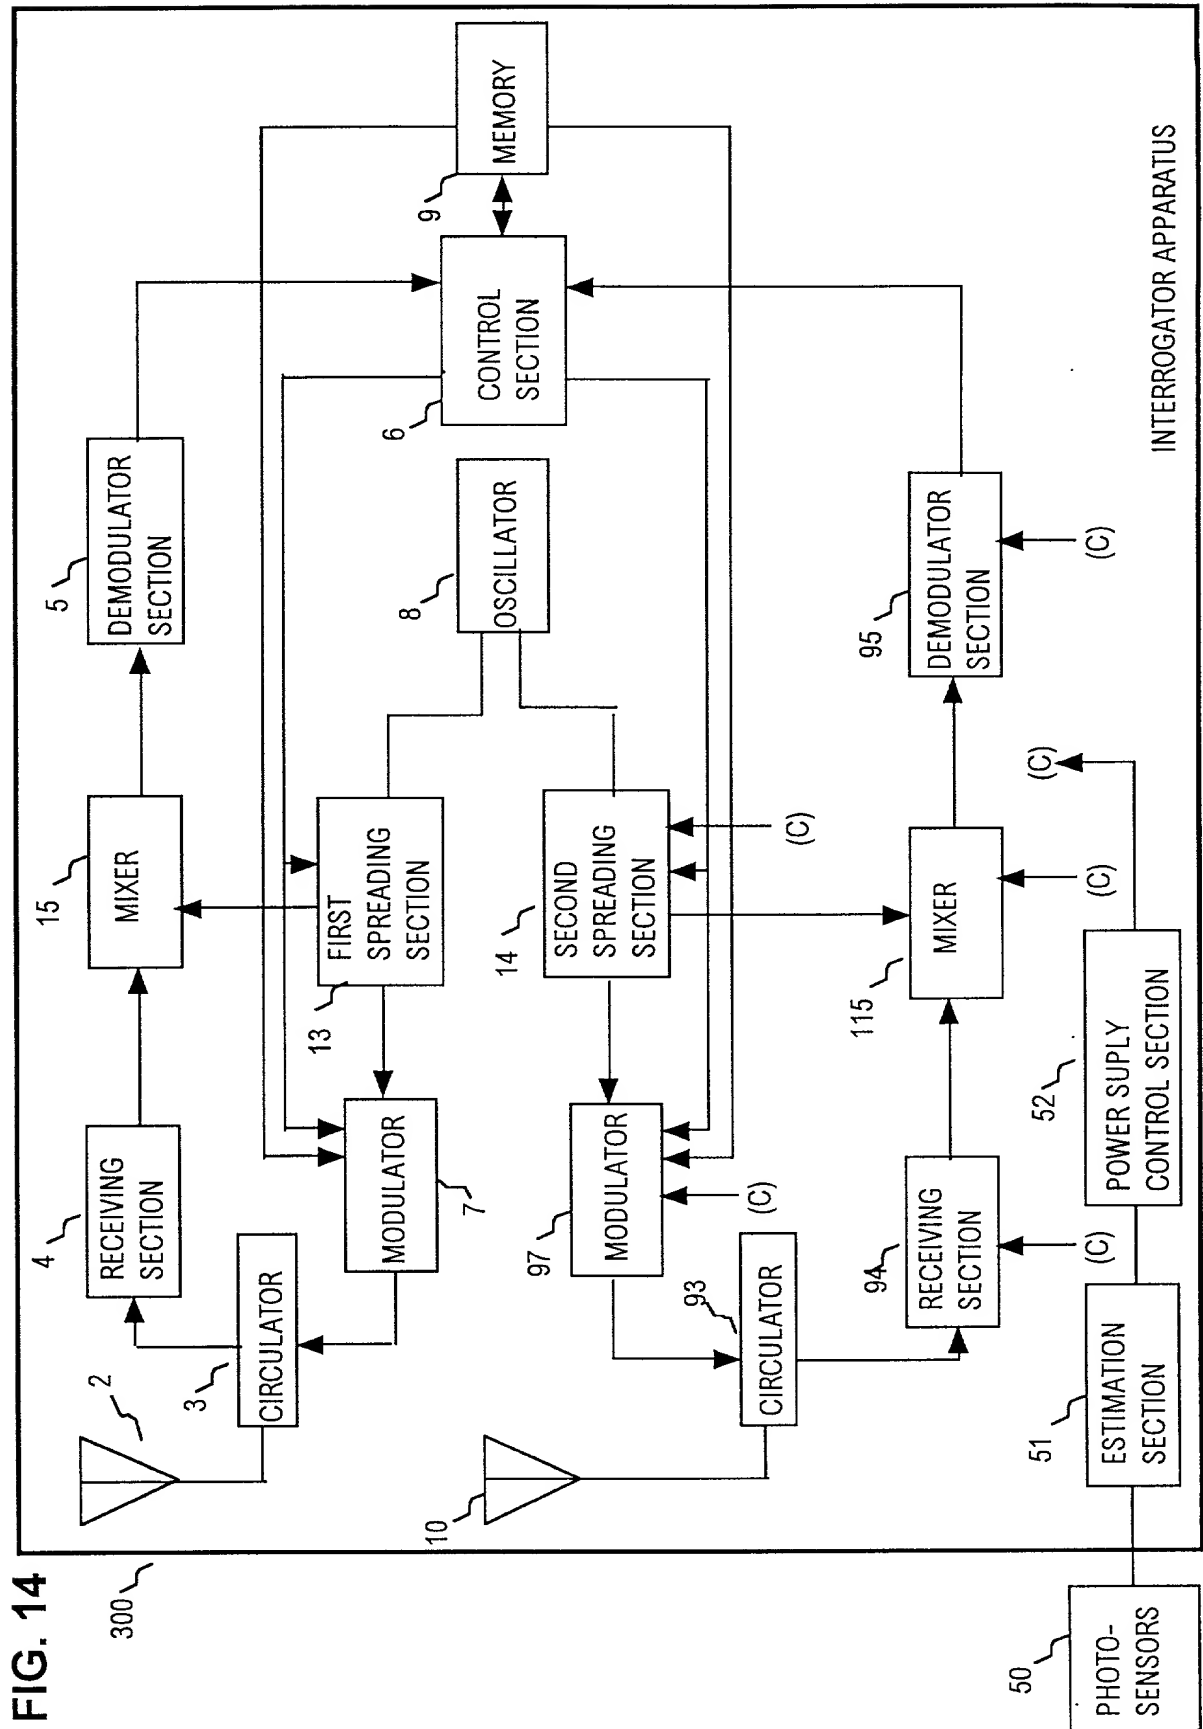


FIG. 15

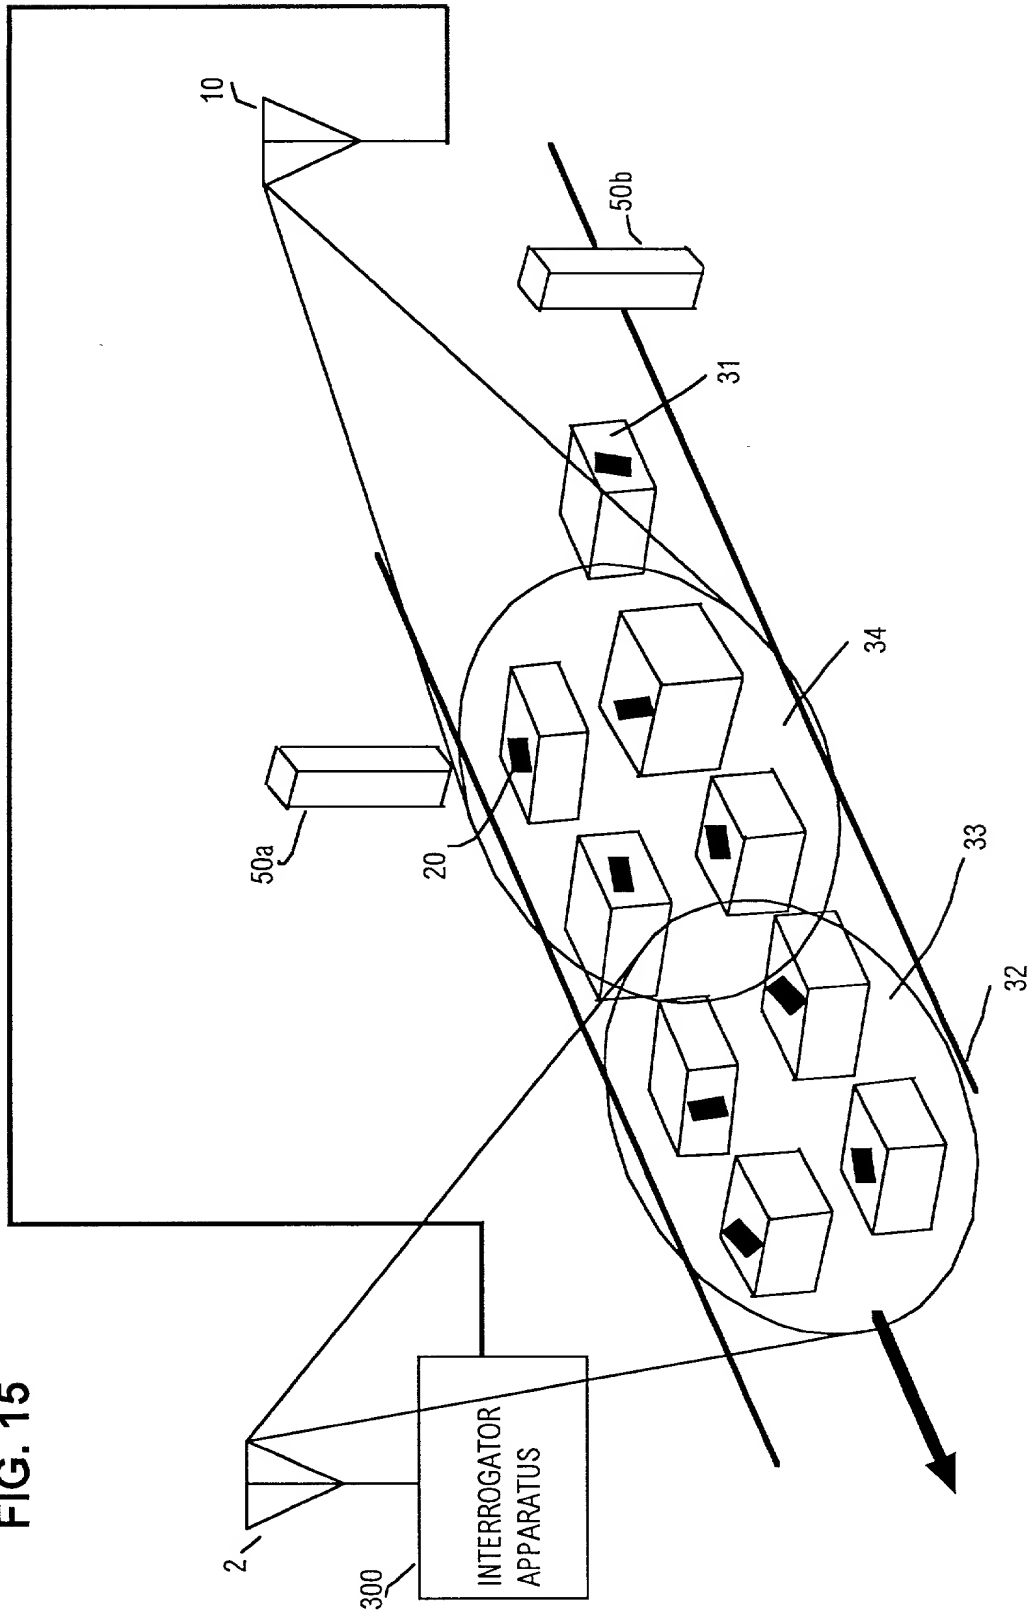


FIG. 16

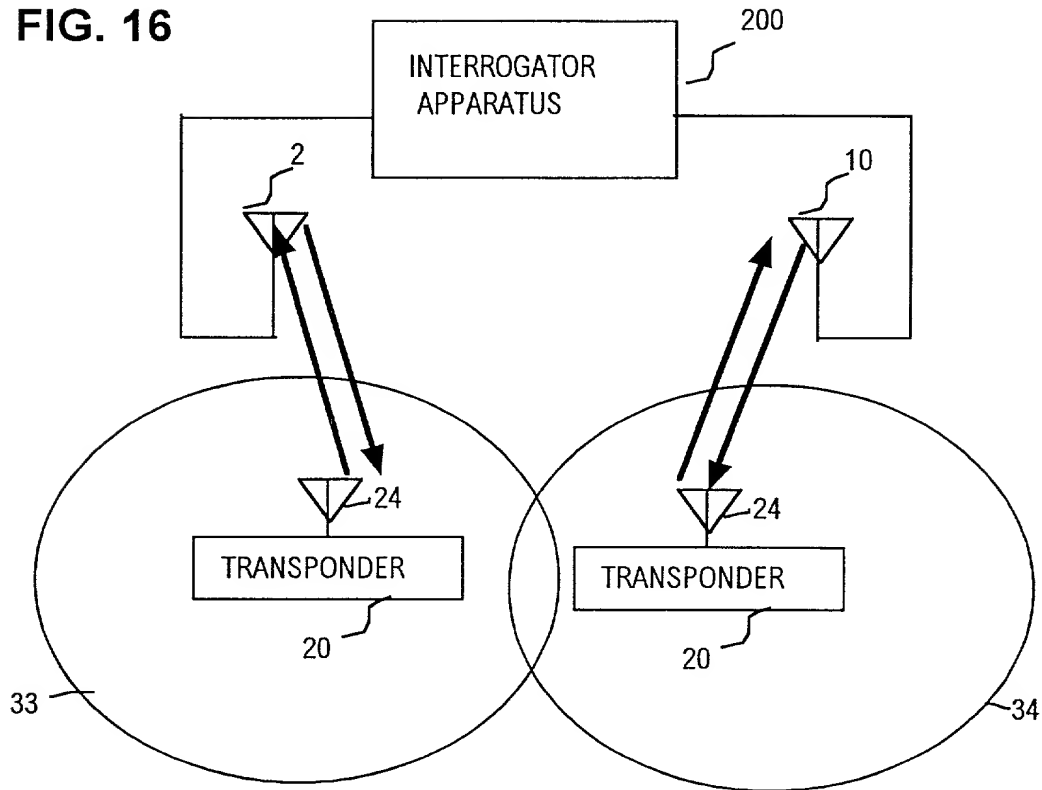


FIG. 17A

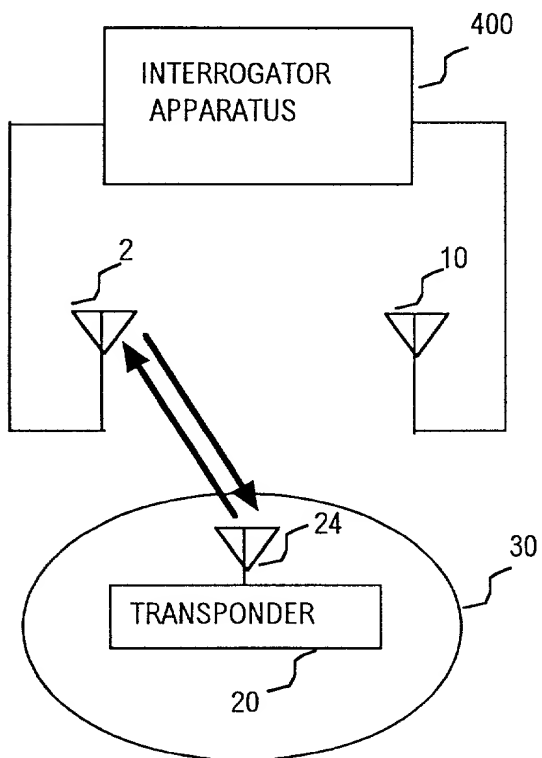


FIG. 17B


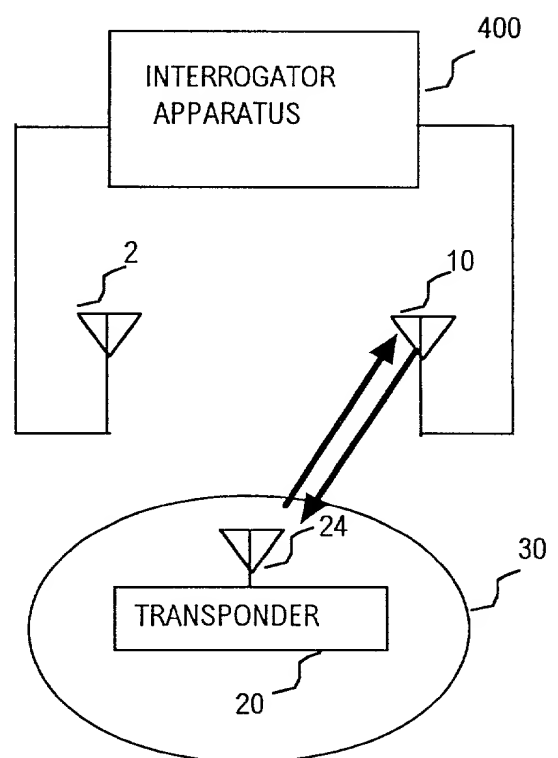


FIG. 18

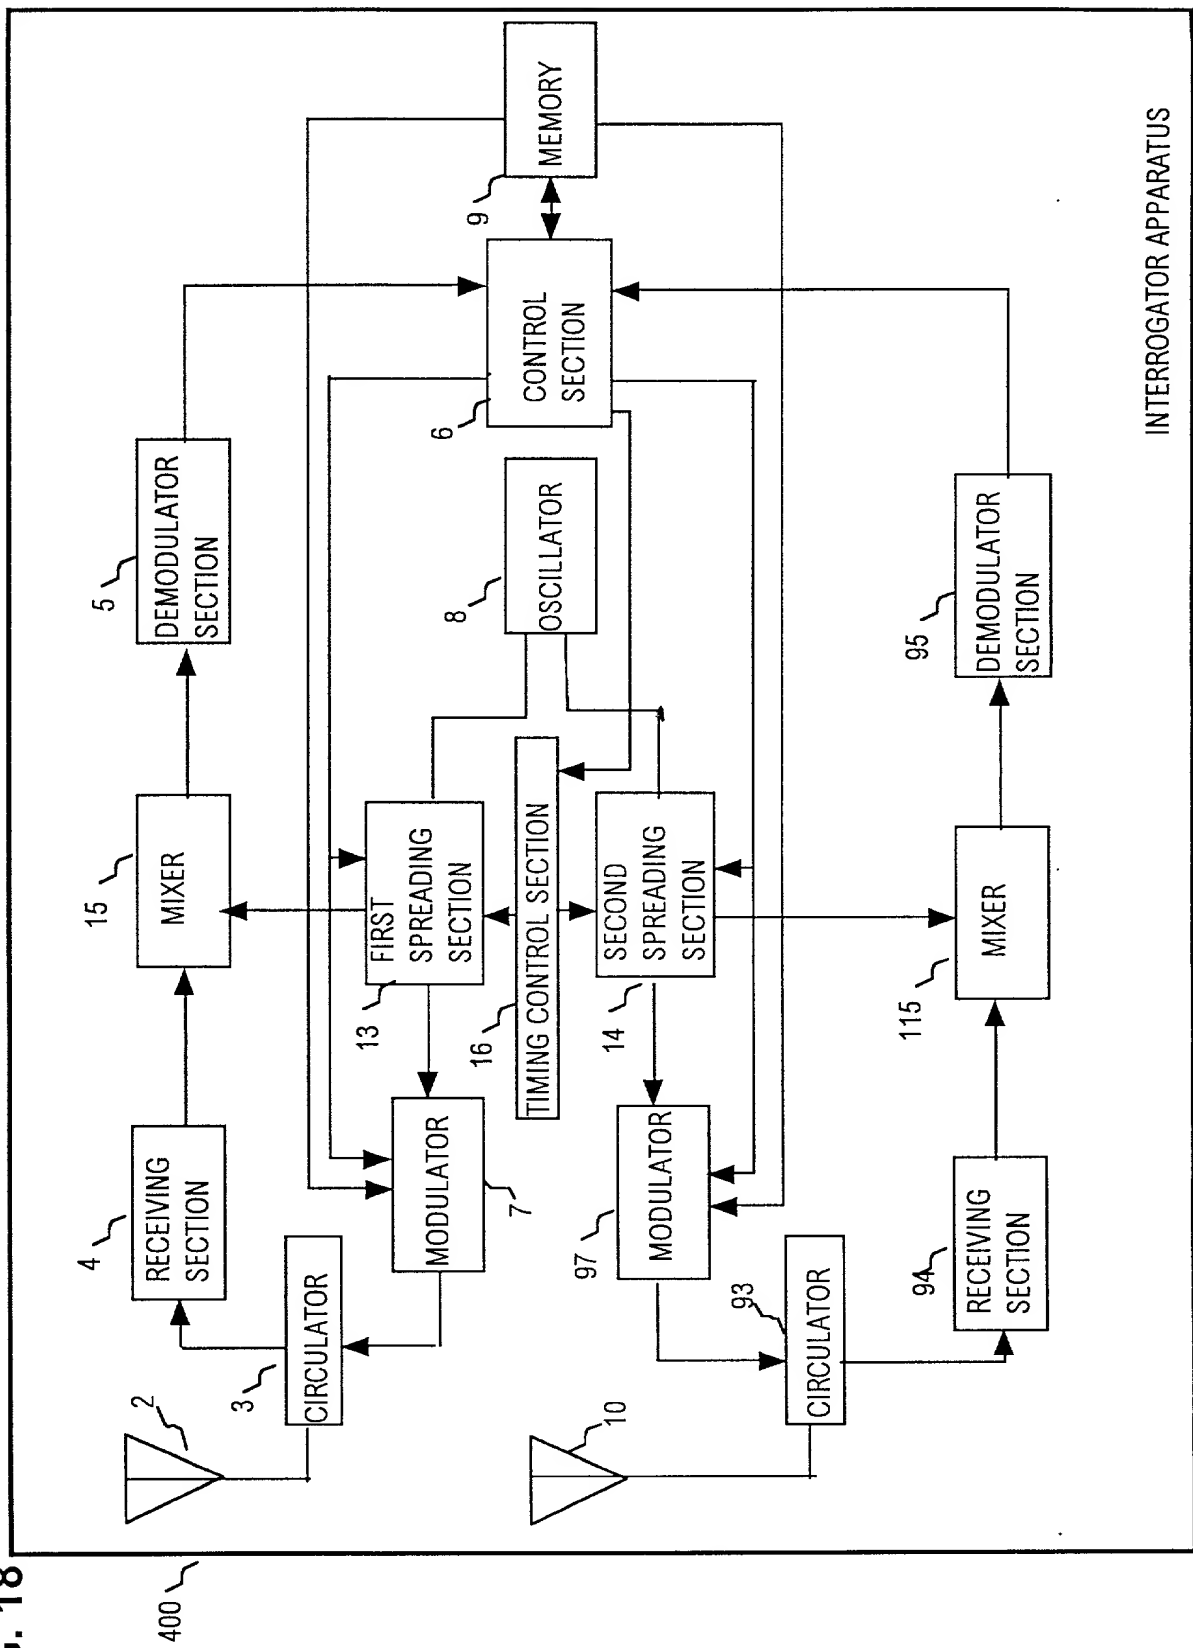

INTERROGATOR APPARATUS

FIG. 19


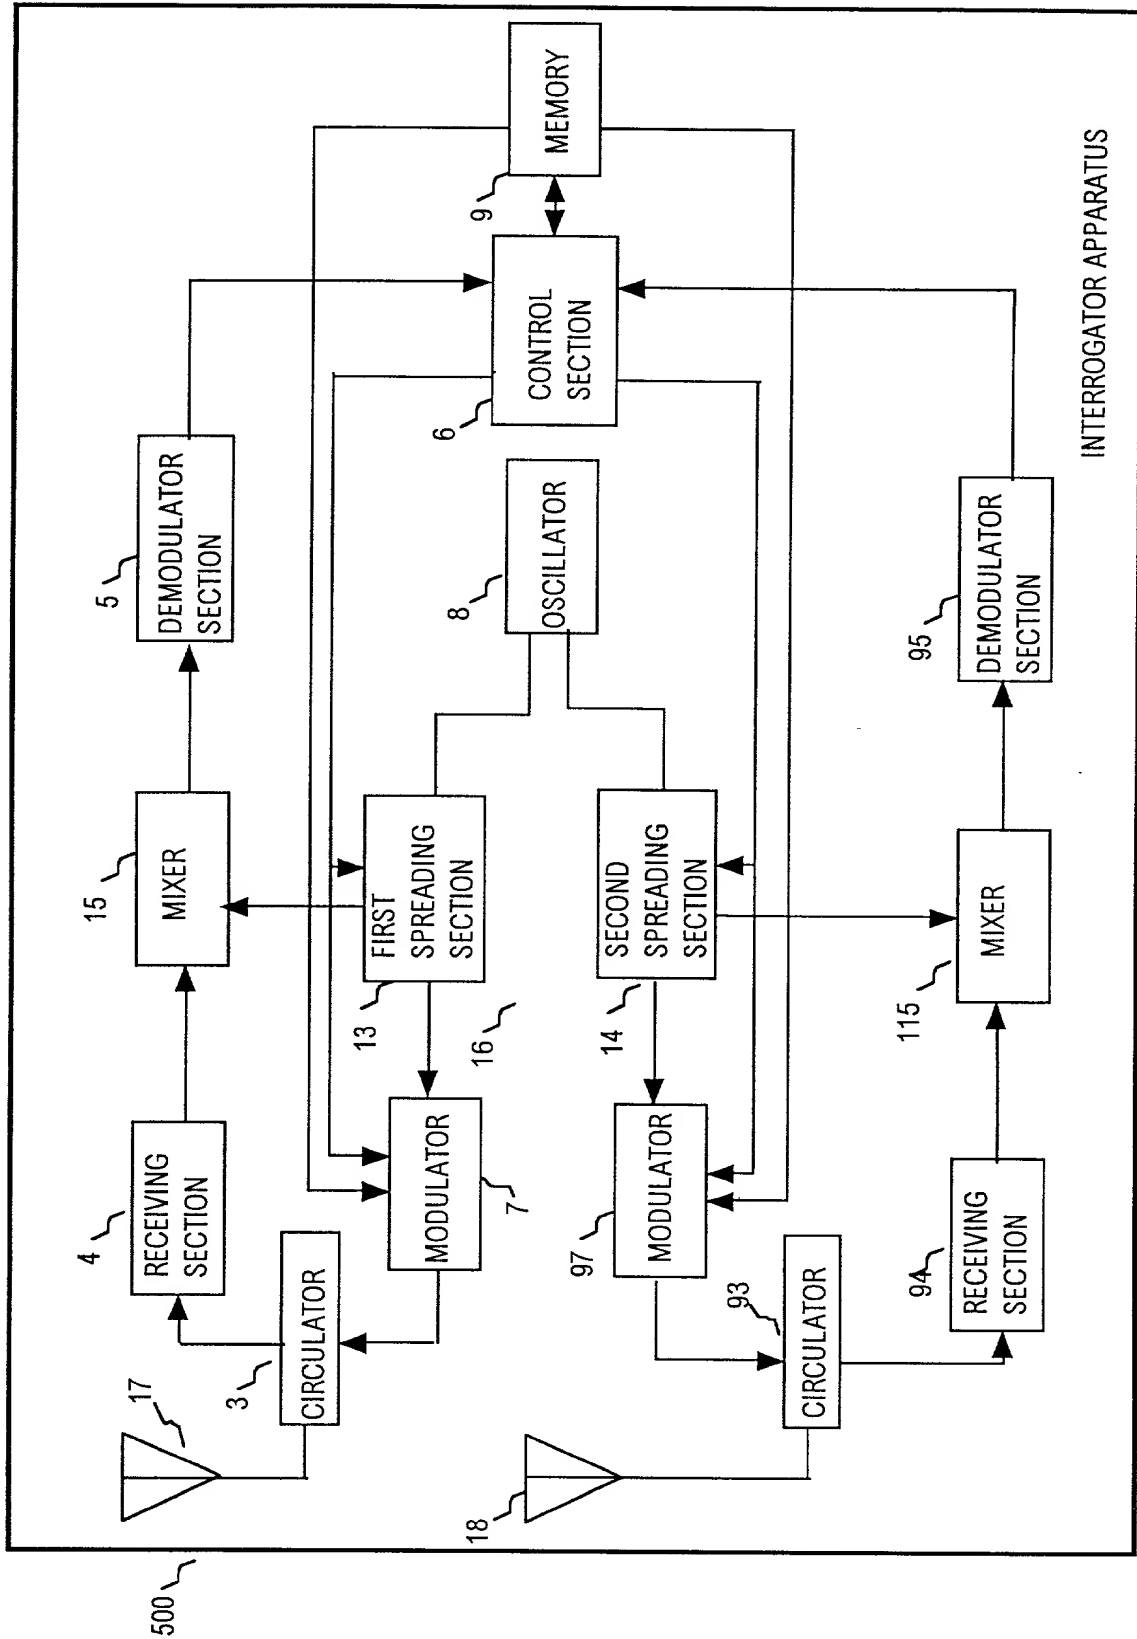


FIG. 20

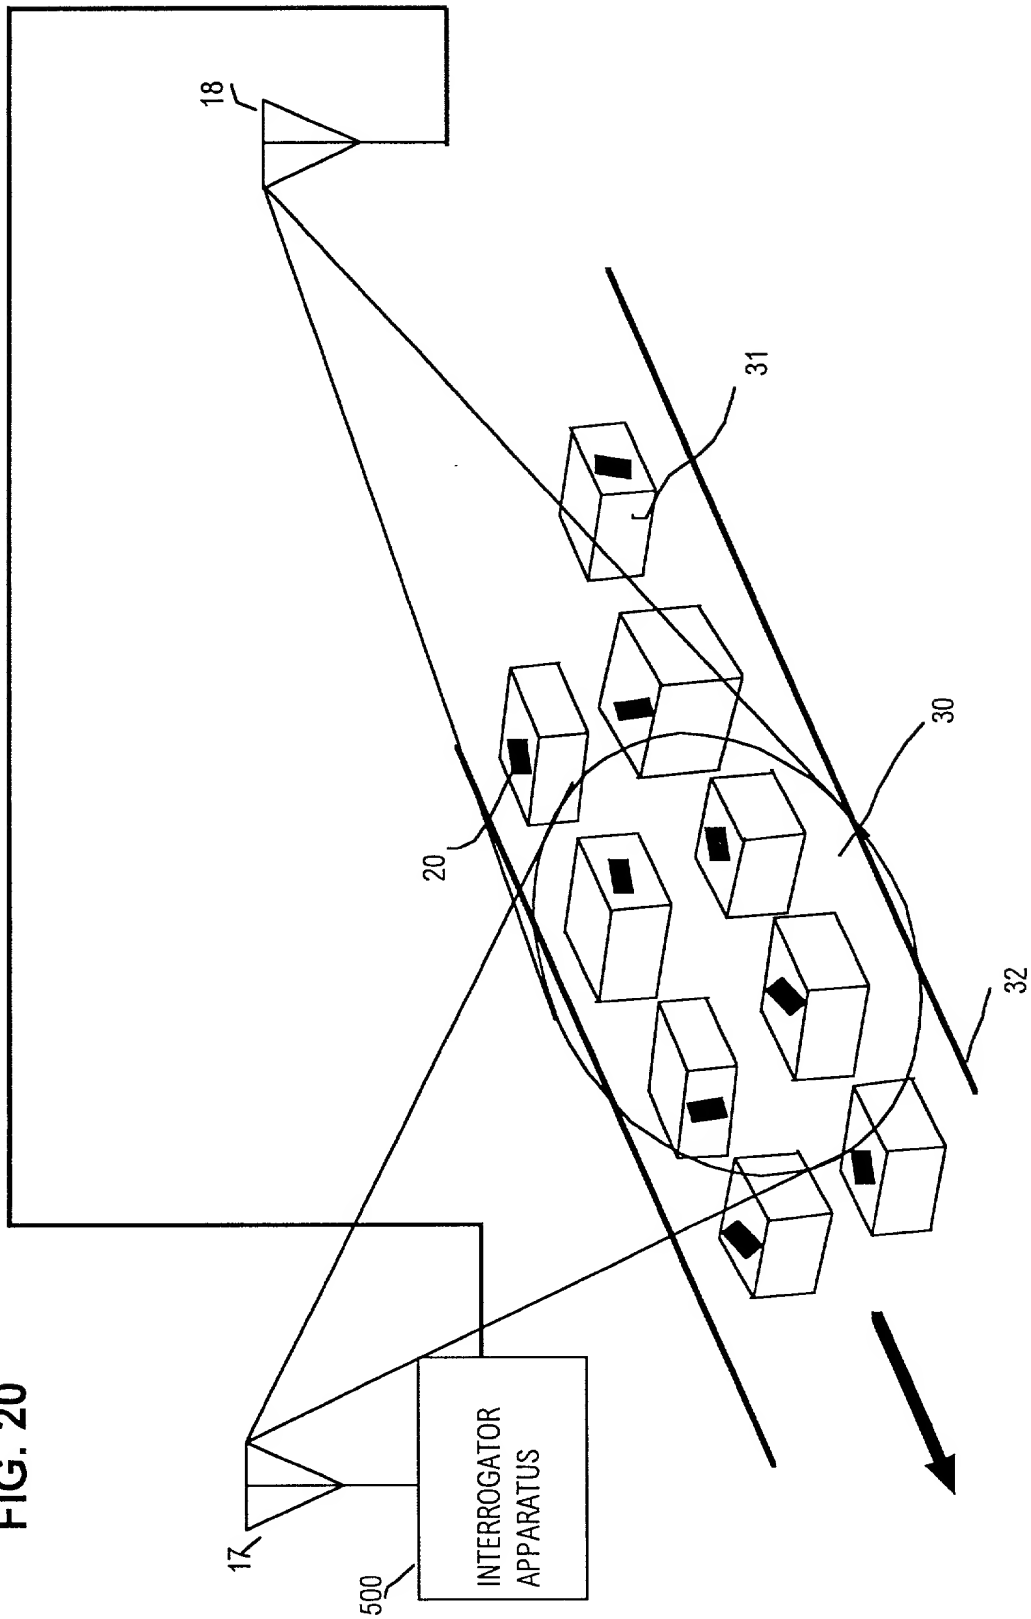

6007




FIG. 22

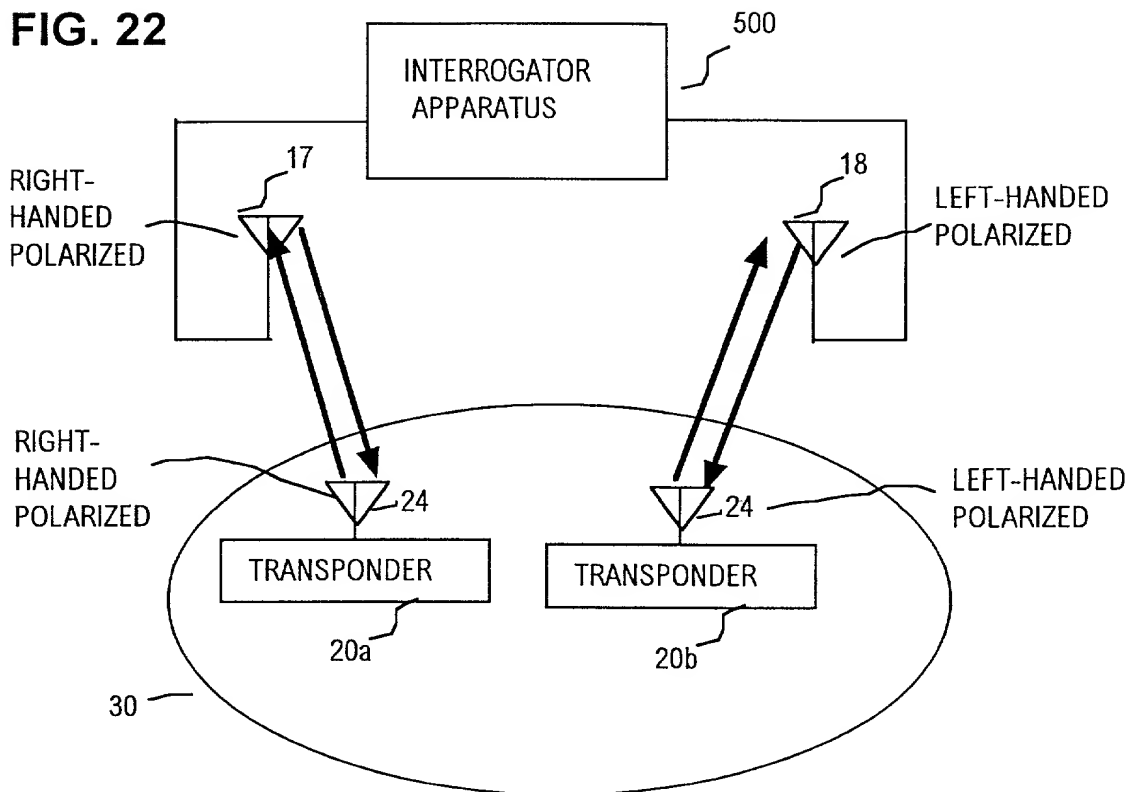


FIG. 23

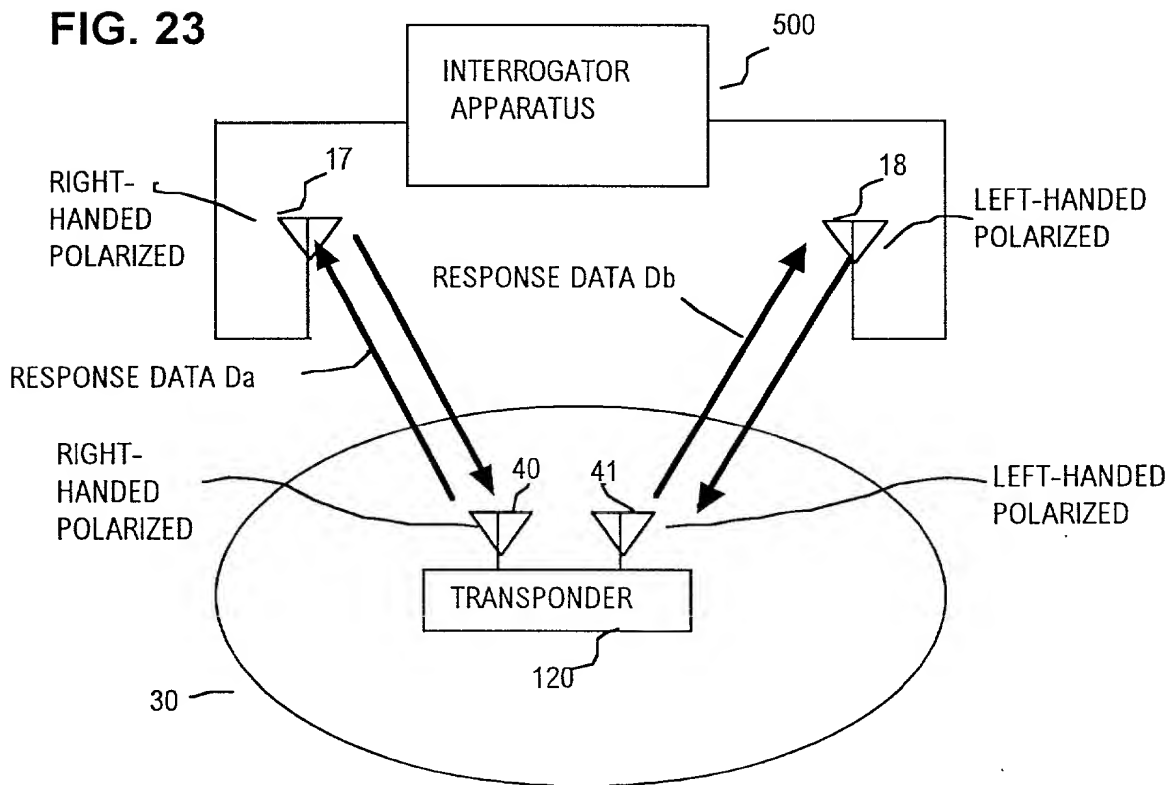


FIG. 24

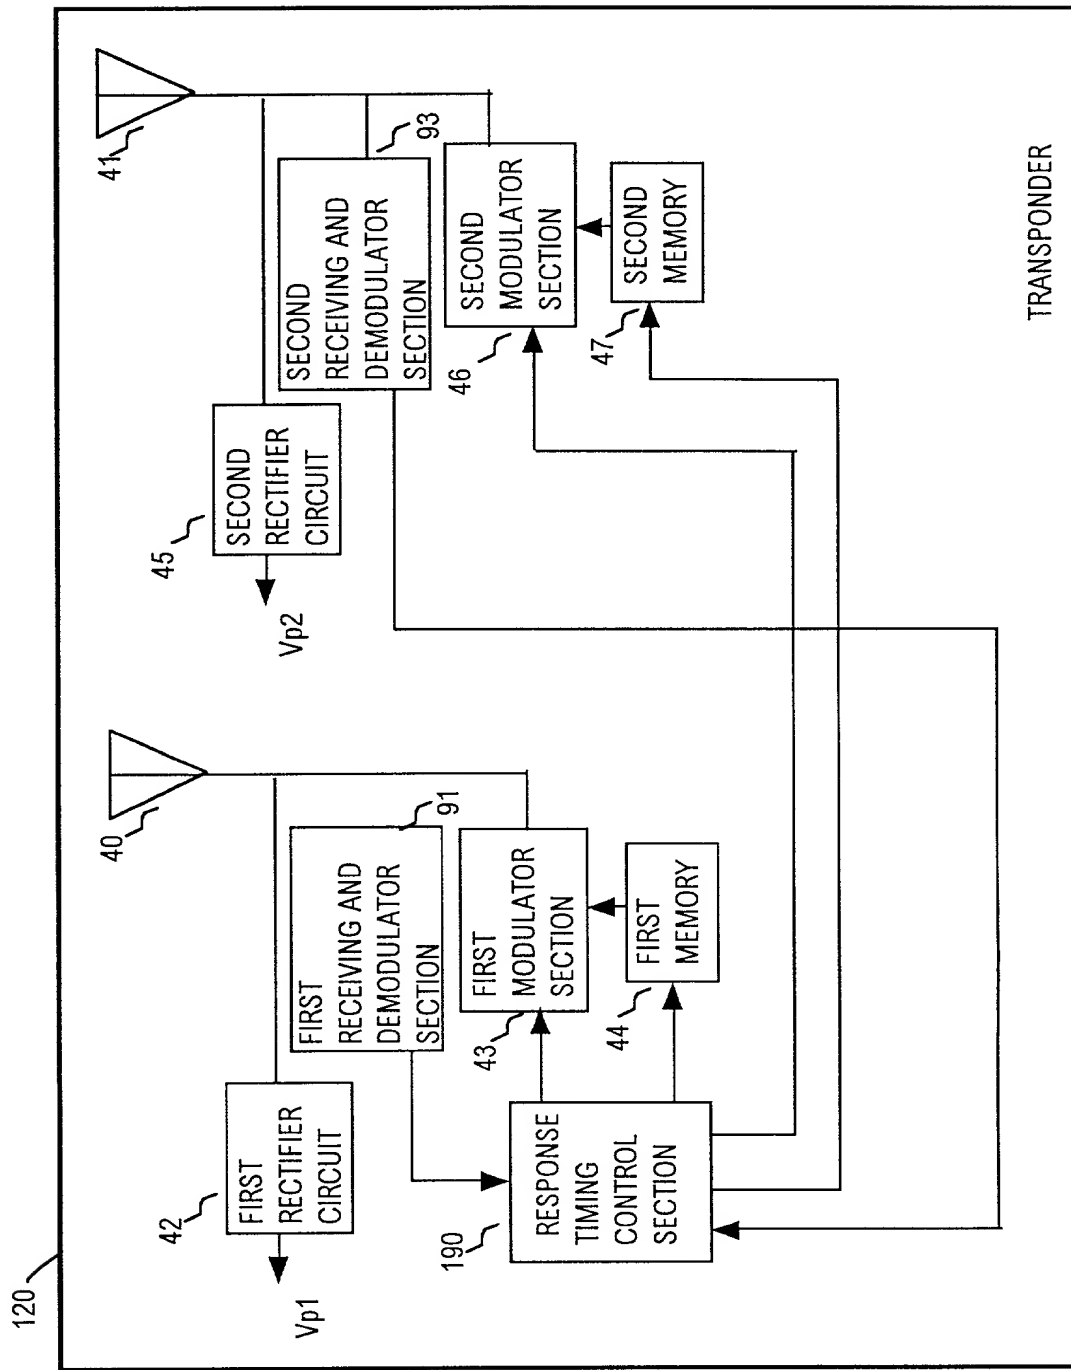


FIG. 25

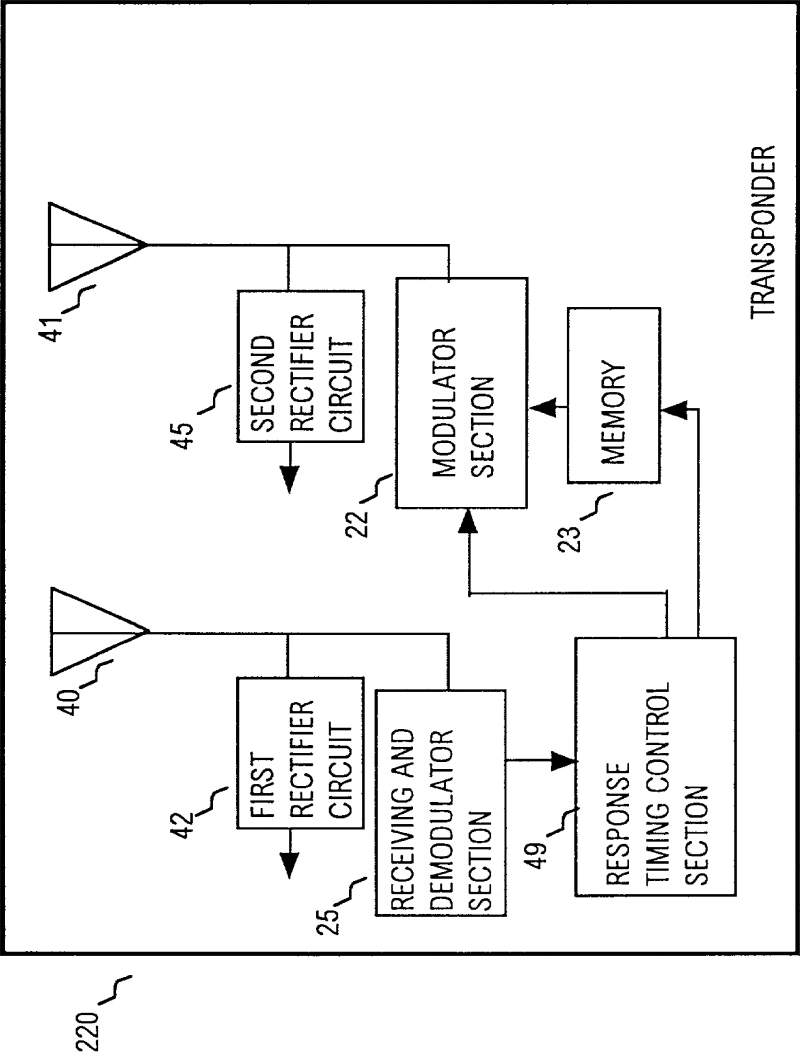


FIG. 26

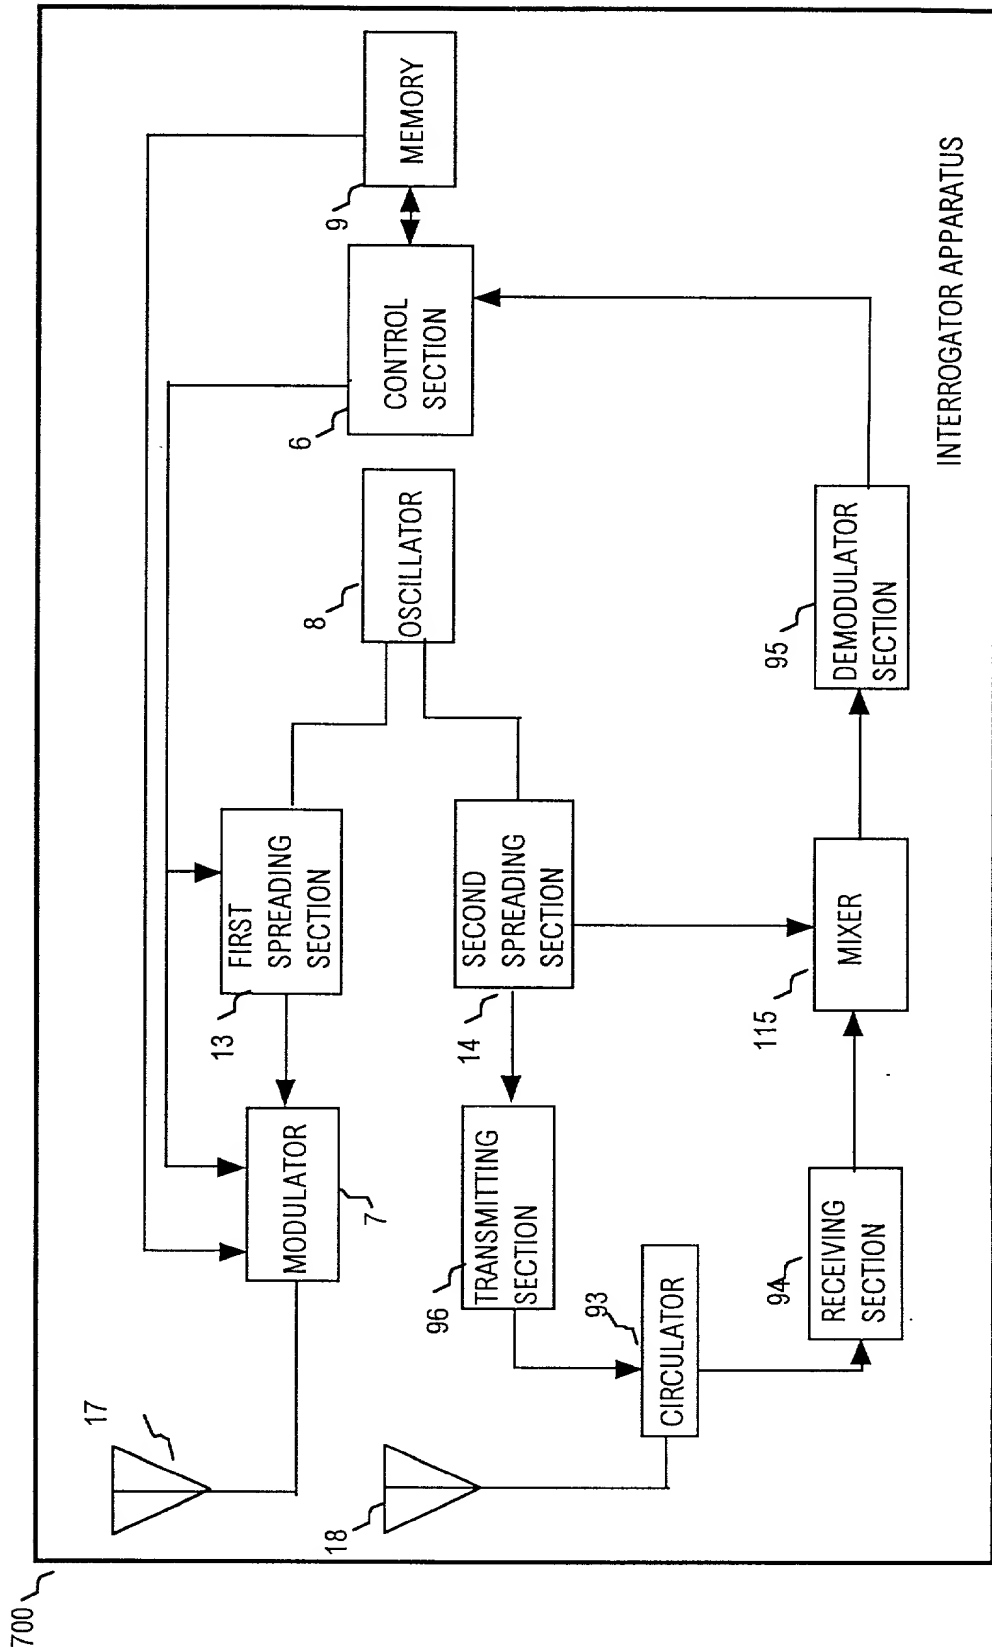


FIG. 27

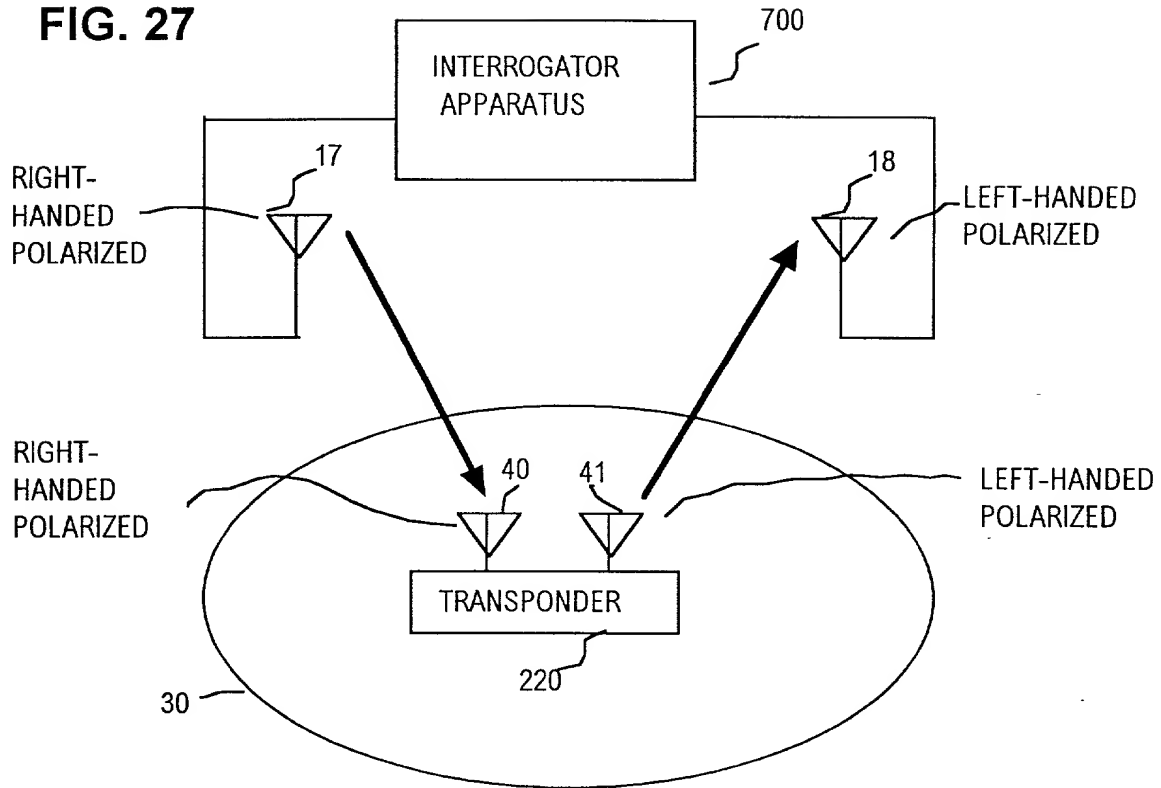


FIG. 28

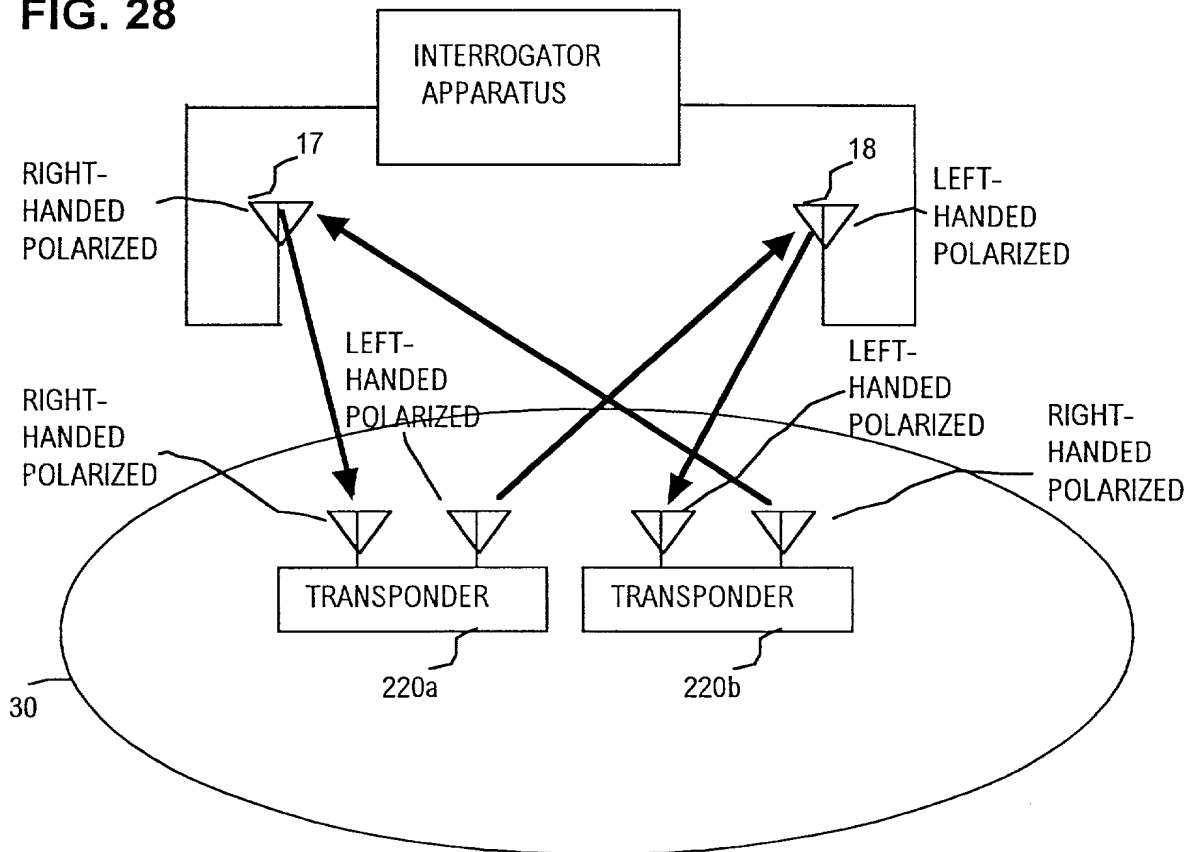


FIG. 29

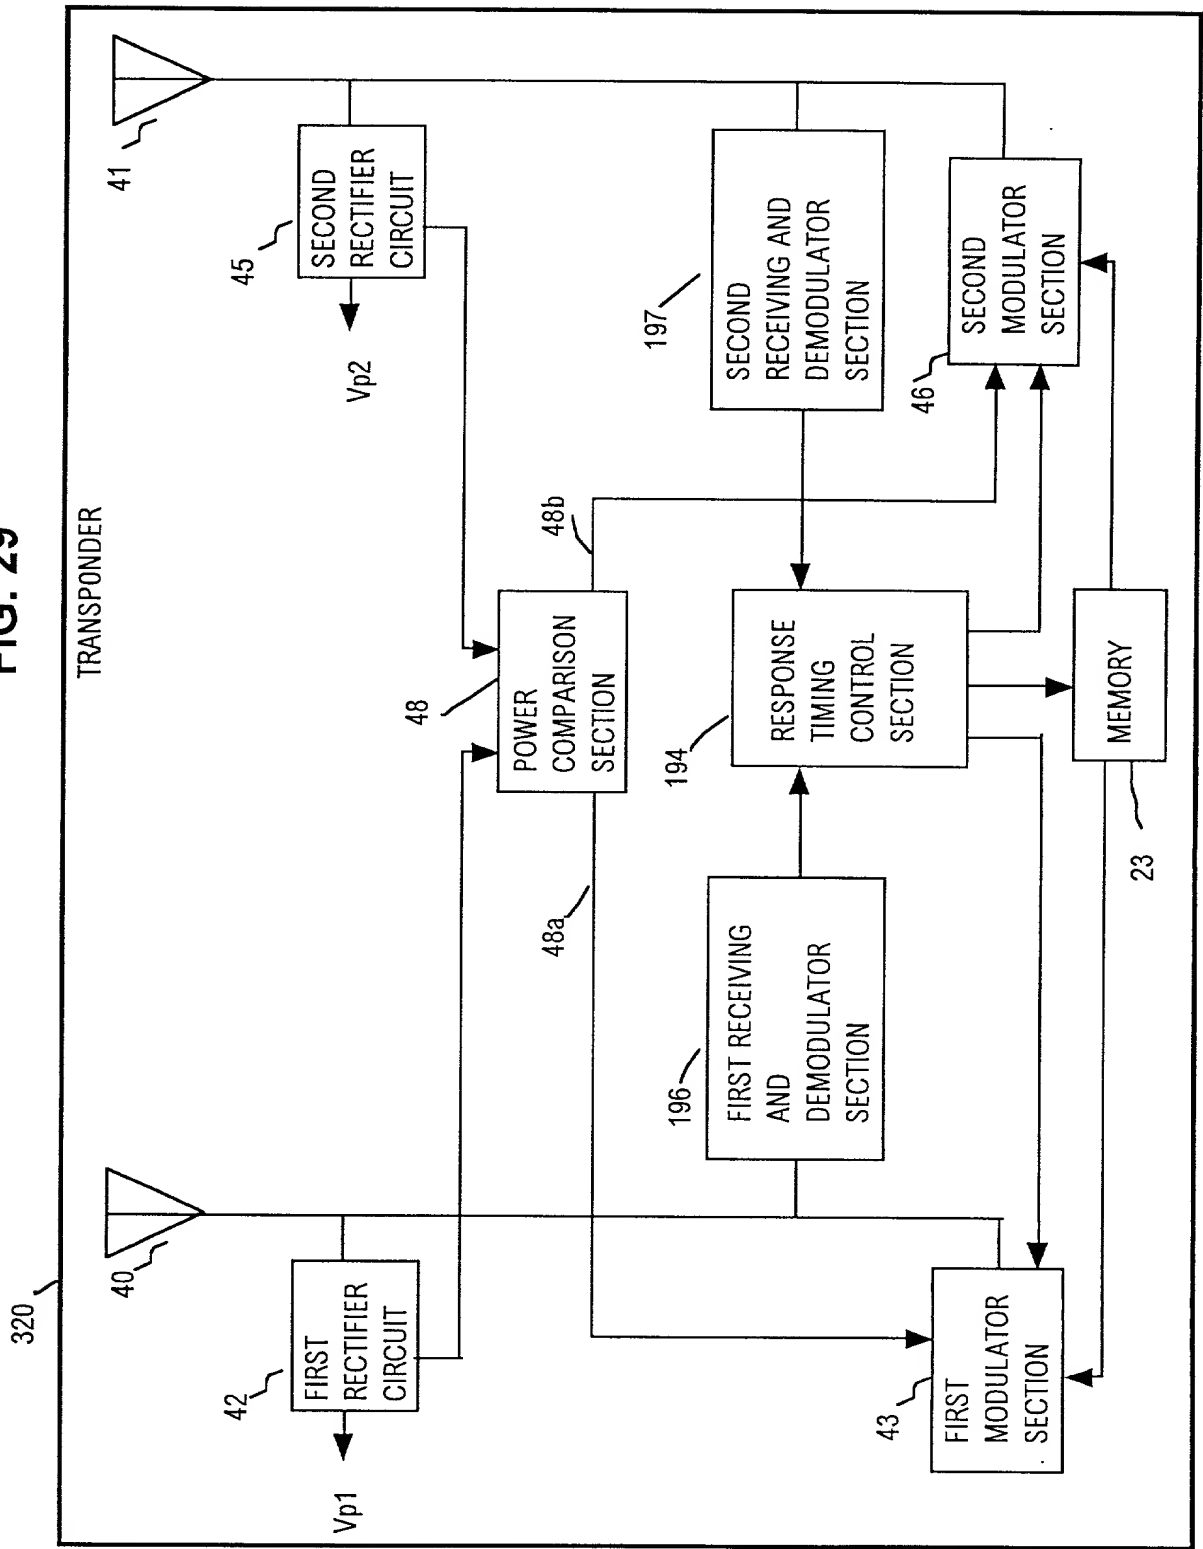


FIG. 30A



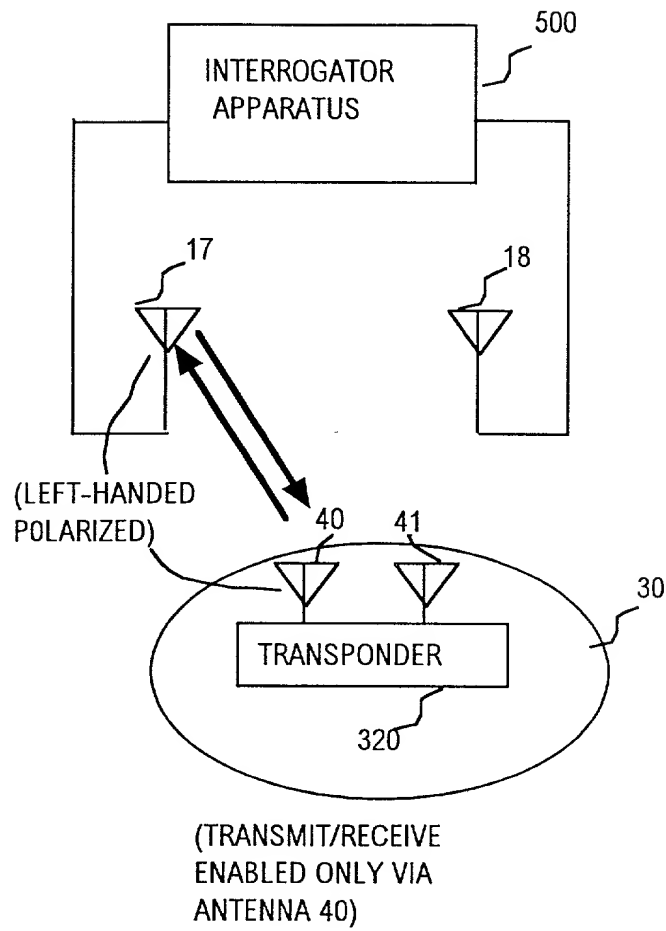


FIG. 30B

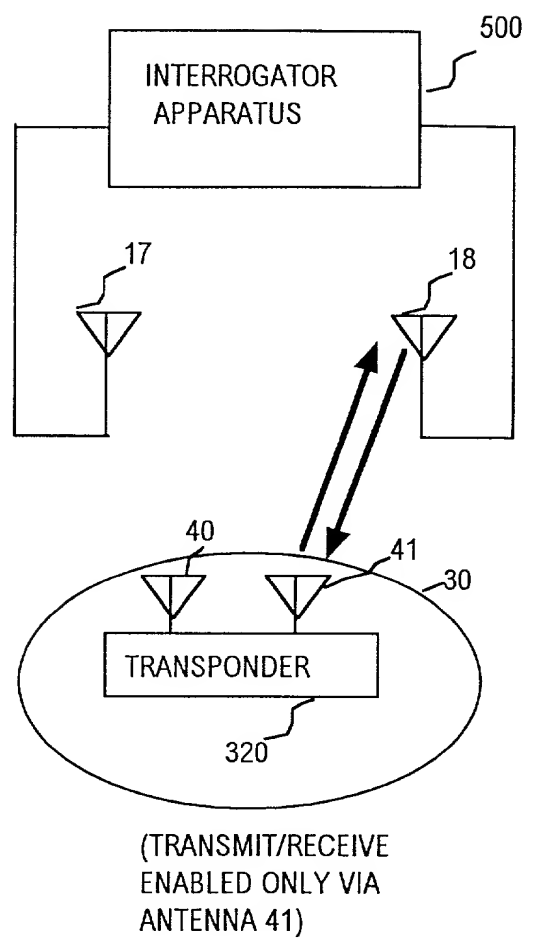

27/68

FIG. 31

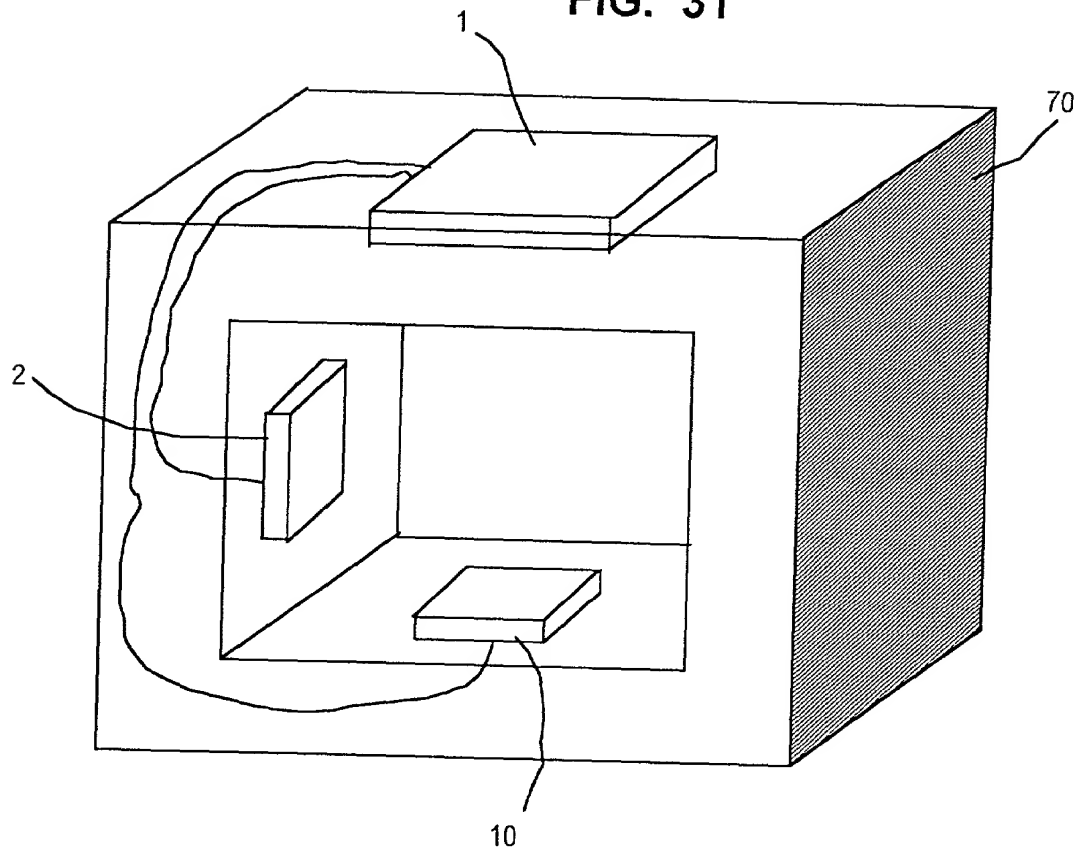

1987	1988	1989	1990	1991
1992	1993	1994	1995	1996
1997	1998	1999	2000	2001
2002	2003	2004	2005	2006
2007	2008	2009	2010	2011
2012	2013	2014	2015	2016
2017	2018	2019	2020	2021
2022	2023	2024	2025	2026
2027	2028	2029	2030	2031
2032	2033	2034	2035	2036
2037	2038	2039	2040	2041
2042	2043	2044	2045	2046
2047	2048	2049	2050	2051
2052	2053	2054	2055	2056
2057	2058	2059	2060	2061
2062	2063	2064	2065	2066
2067	2068	2069	2070	2071
2072	2073	2074	2075	2076
2077	2078	2079	2080	2081
2082	2083	2084	2085	2086
2087	2088	2089	2090	2091
2092	2093	2094	2095	2096
2097	2098	2099	2100	2101
2102	2103	2104	2105	2106
2107	2108	2109	2110	2111
2112	2113	2114	2115	2116
2117	2118	2119	2120	2121
2122	2123	2124	2125	2126
2127	2128	2129	2130	2131
2132	2133	2134	2135	2136
2137	2138	2139	2140	2141
2142	2143	2144	2145	2146
2147	2148	2149	2150	2151
2152	2153	2154	2155	2156
2157	2158	2159	2160	2161
2162	2163	2164	2165	2166
2167	2168	2169	2170	2171
2172	2173	2174	2175	2176
2177	2178	2179	2180	2181
2182	2183	2184	2185	2186
2187	2188	2189	2190	2191
2192	2193	2194	2195	2196
2197	2198	2199	2200	2201
2202	2203	2204	2205	2206
2207	2208	2209	2210	2211
2212	2213	2214	2215	2216
2217	2218	2219	2220	2221
2222	2223	2224	2225	2226
2227	2228	2229	2230	2231
2232	2233	2234	2235	2236
2237	2238	2239	2240	2241
2242	2243	2244	2245	2246
2247	2248	2249	2250	2251
2252	2253	2254	2255	2256
2257	2258	2259	2260	2261
2262	2263	2264	2265	2266
2267	2268	2269	2270	2271
2272	2273	2274	2275	2276
2277	2278	2279	2280	2281
2282	2283	2284	2285	2286
2287	2288	2289	2290	2291
2292	2293	2294	2295	2296
2297	2298	2299	2300	2301
2302	2303	2304	2305	2306
2307	2308	2309	2310	2311
2312	2313	2314	2315	2316
2317	2318	2319	2320	2321
2322	2323	2324	2325	2326
2327	2328	2329	2330	2331
2332	2333	2334	2335	2336
2337	2338	2339	2340	2341
2342	2343	2344	2345	2346
2347	2348	2349	2350	2351
2352	2353	2354	2355	2356
2357	2358	2359	2360	2361
2362	2363	2364	2365	2366
2367	2368	2369	2370	2371
2372	2373	2374	2375	2376
2377	2378	2379	2380	2381
2382	2383	2384	2385	2386
2387	2388	2389	2390	2391
2392	2393	2394	2395	

FIG. 32


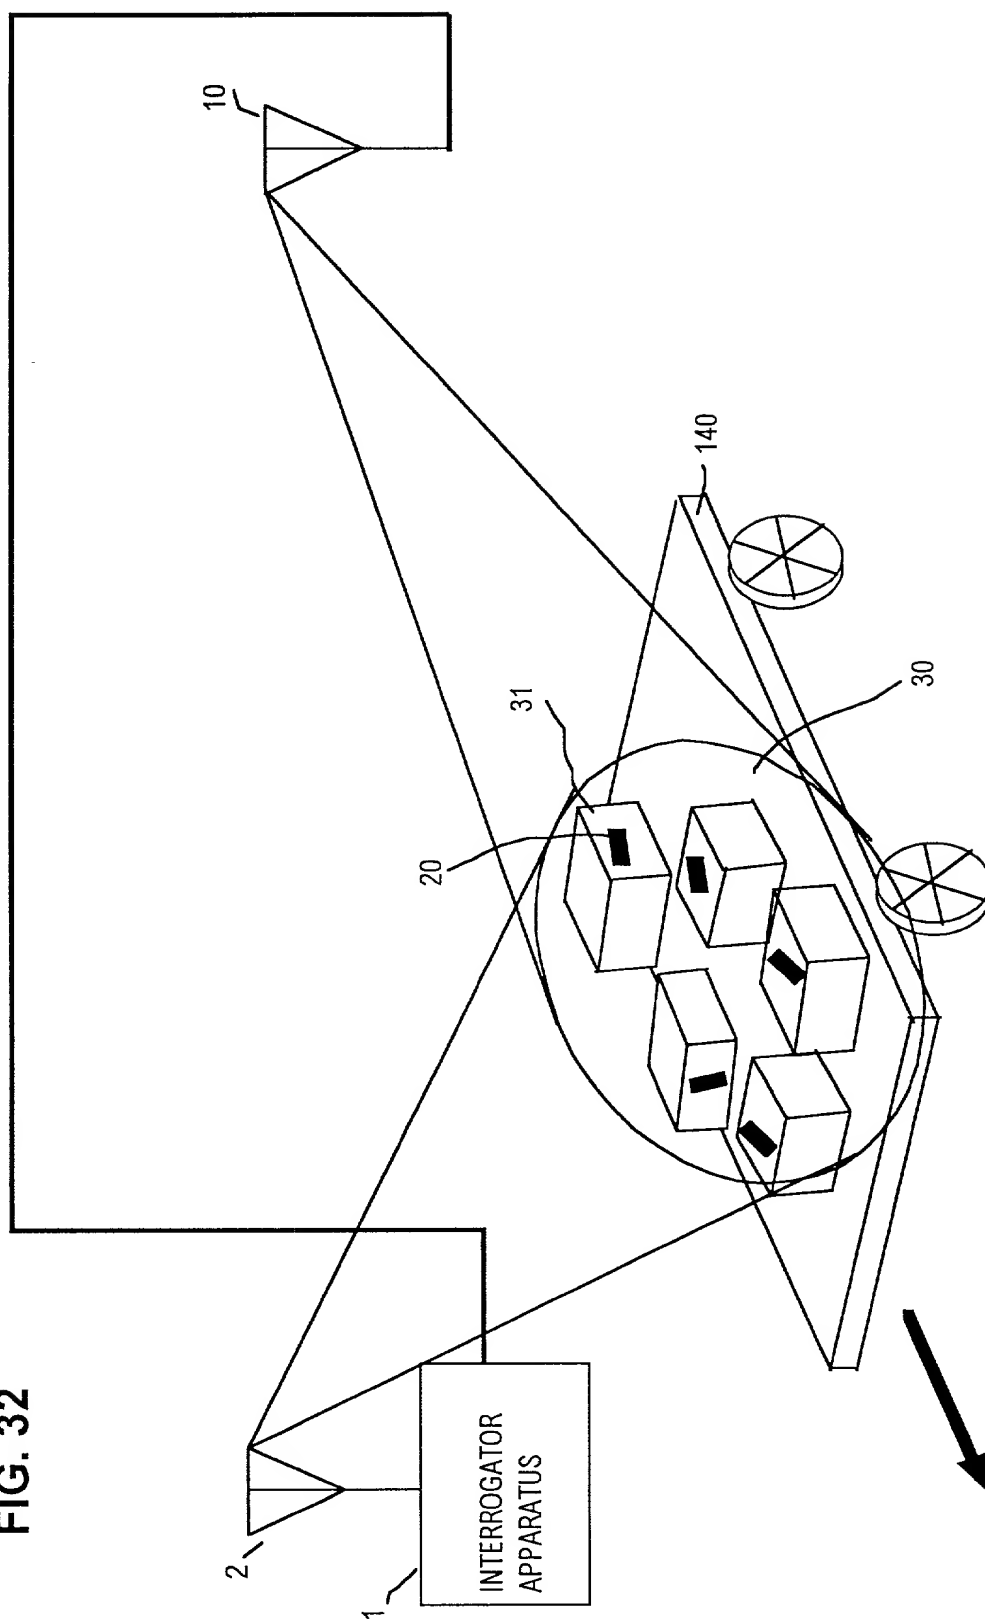


FIG. 33

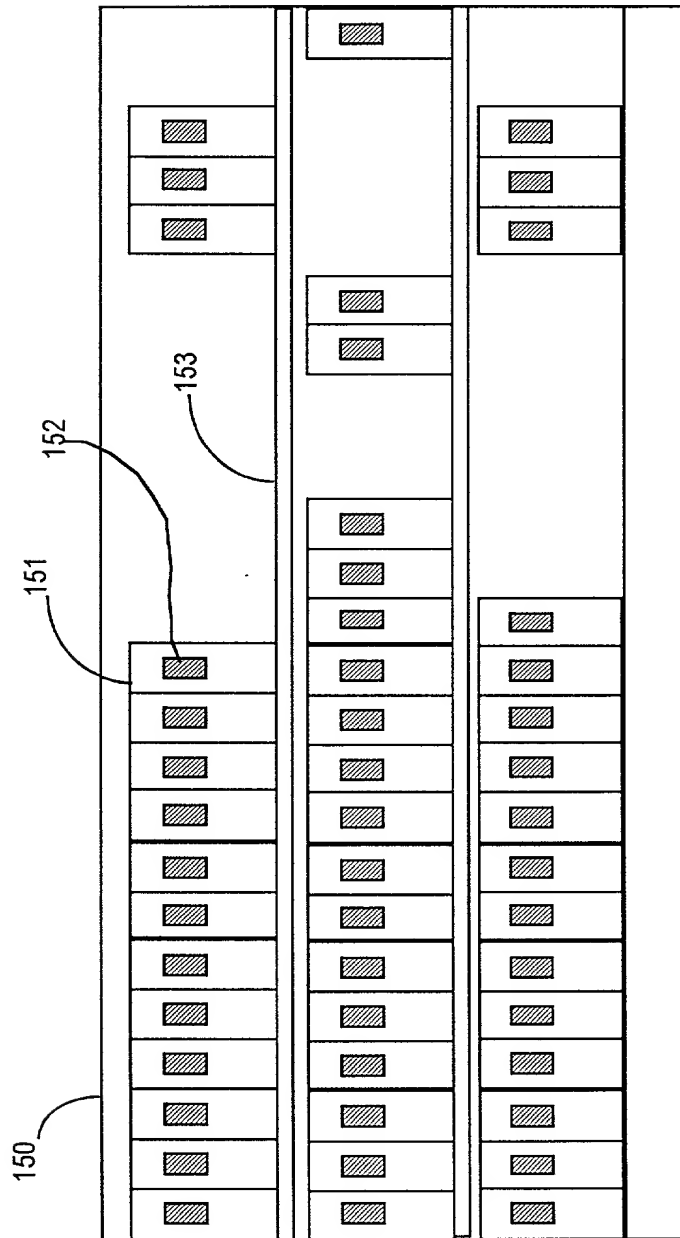

INTERROGATOR
APPARATUS

154

155

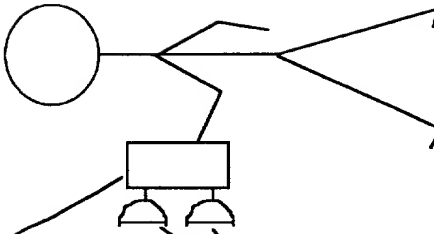


FIG. 34A

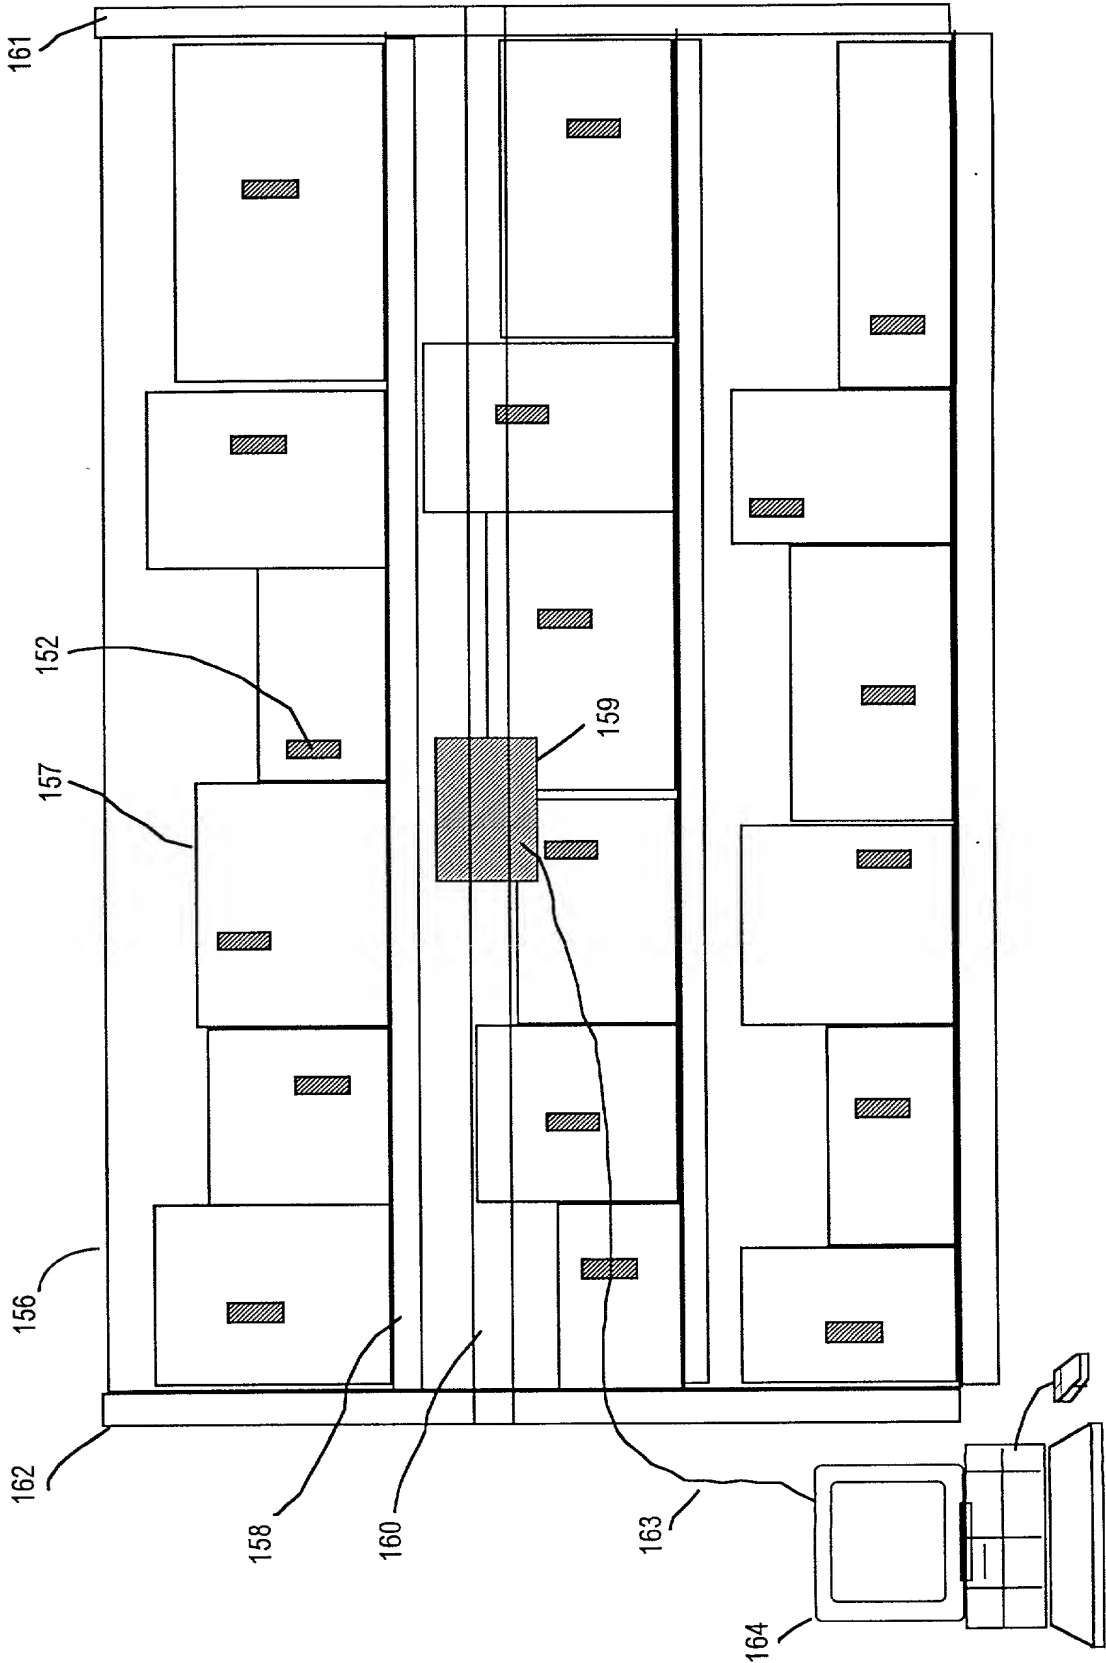


FIG. 34B

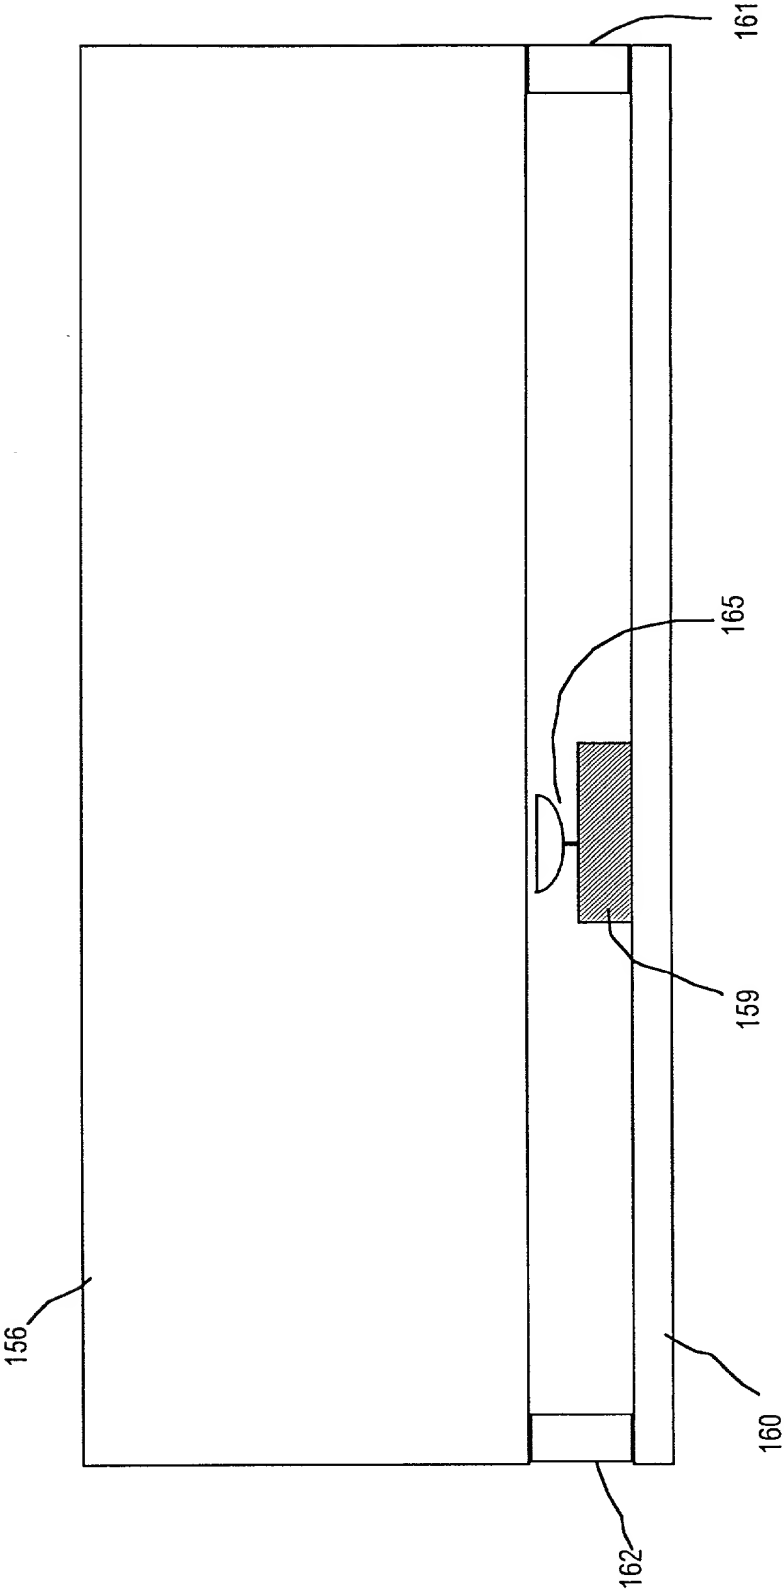


FIG. 35


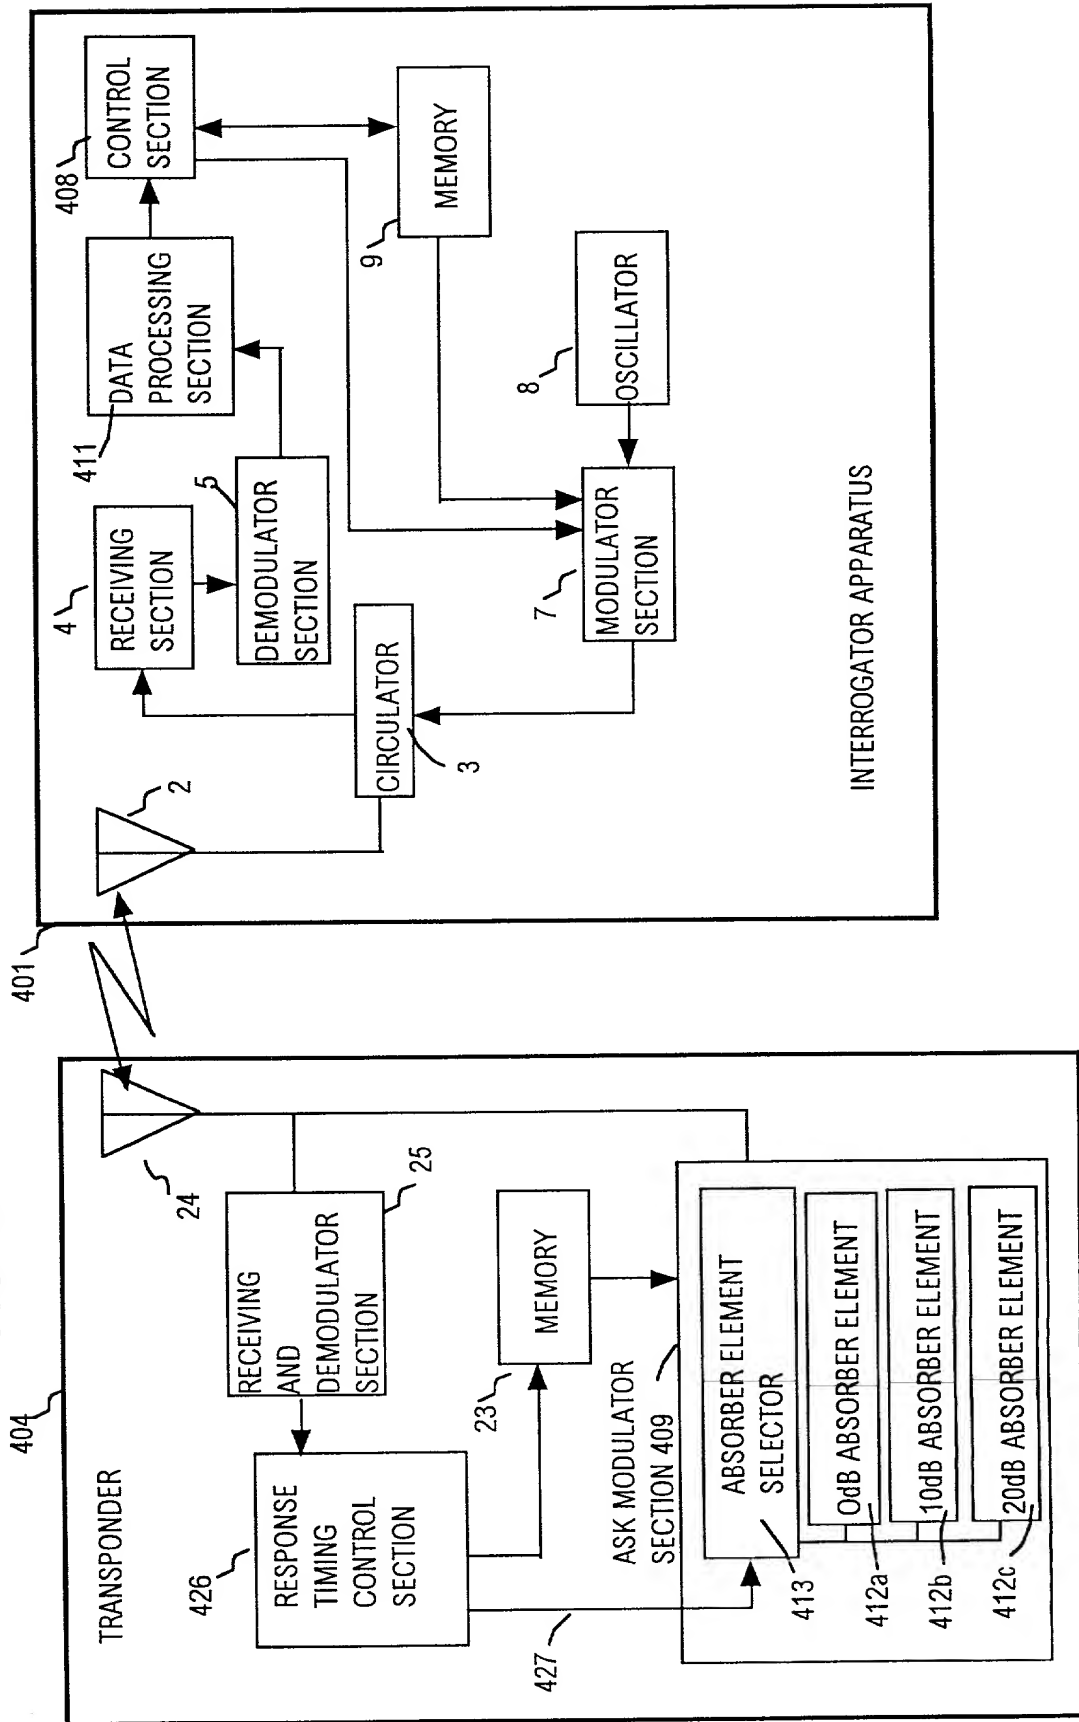


FIG. 36

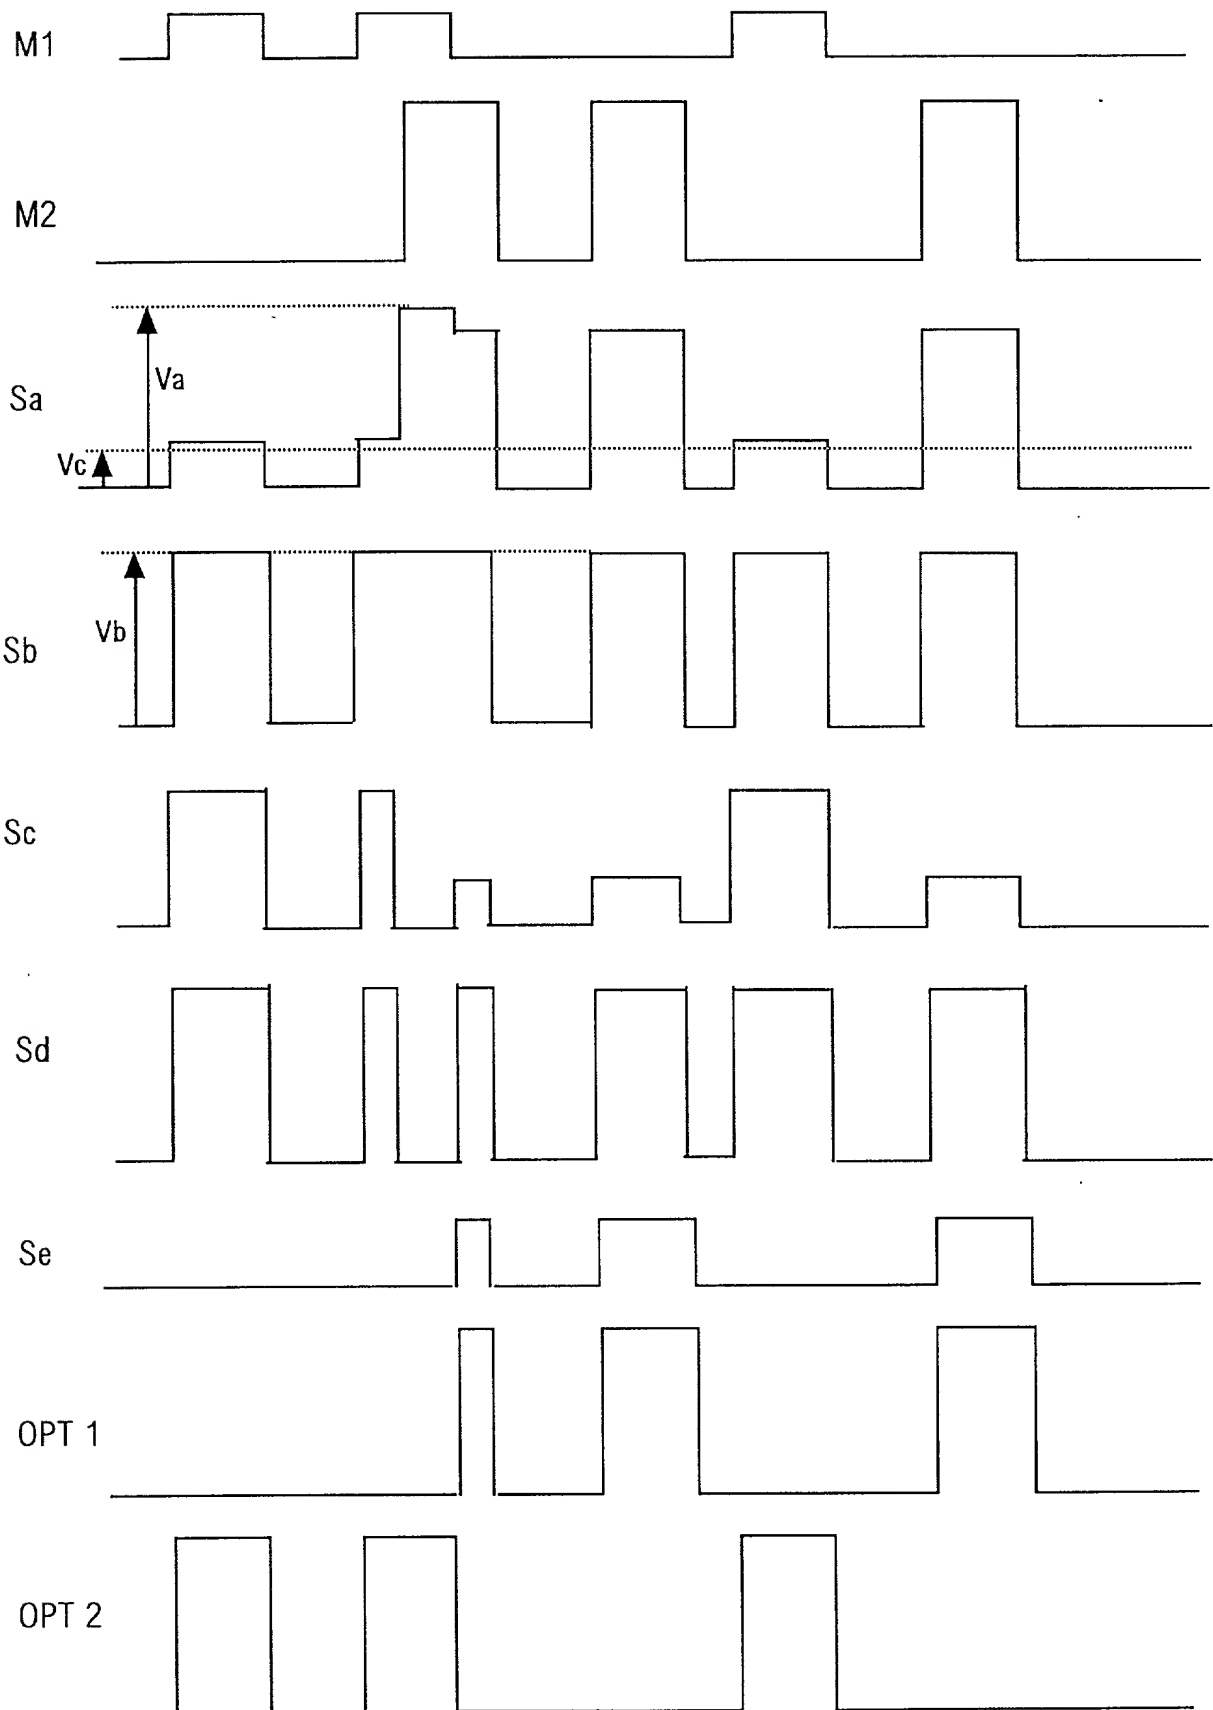

511

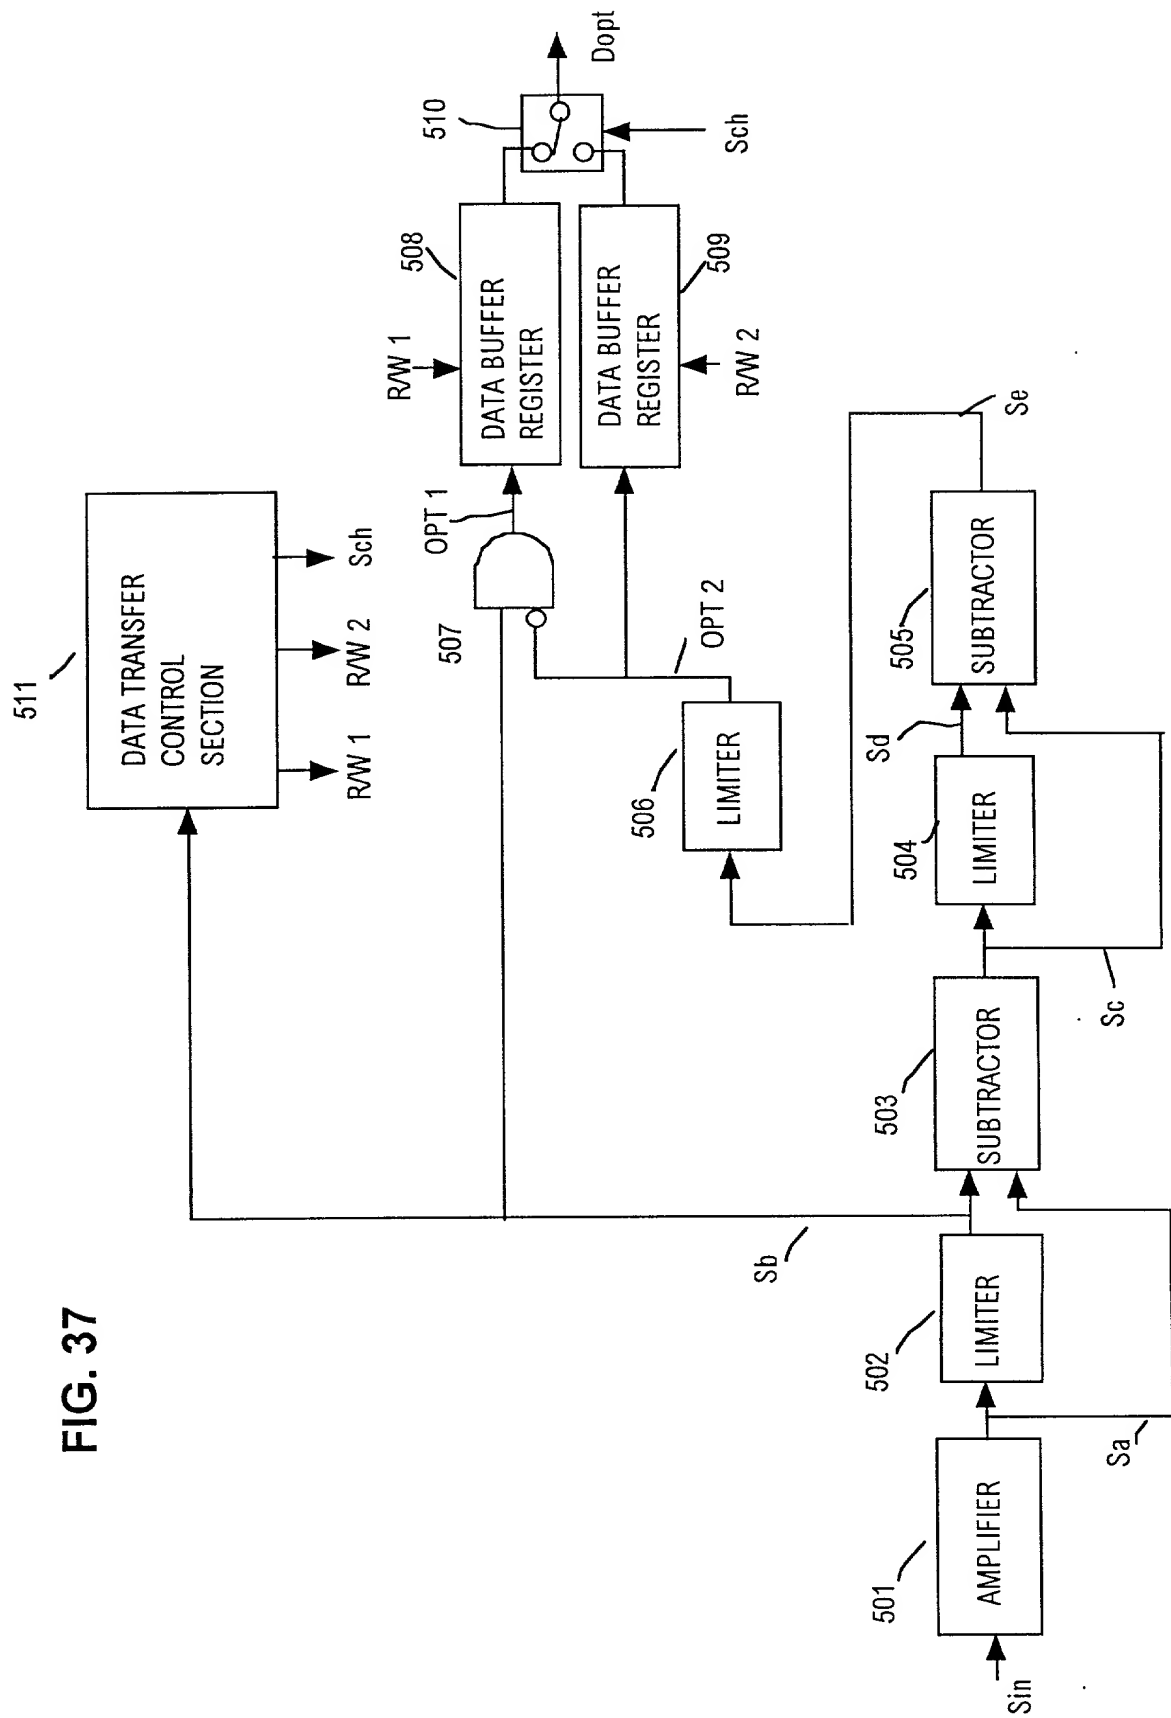


FIG. 38

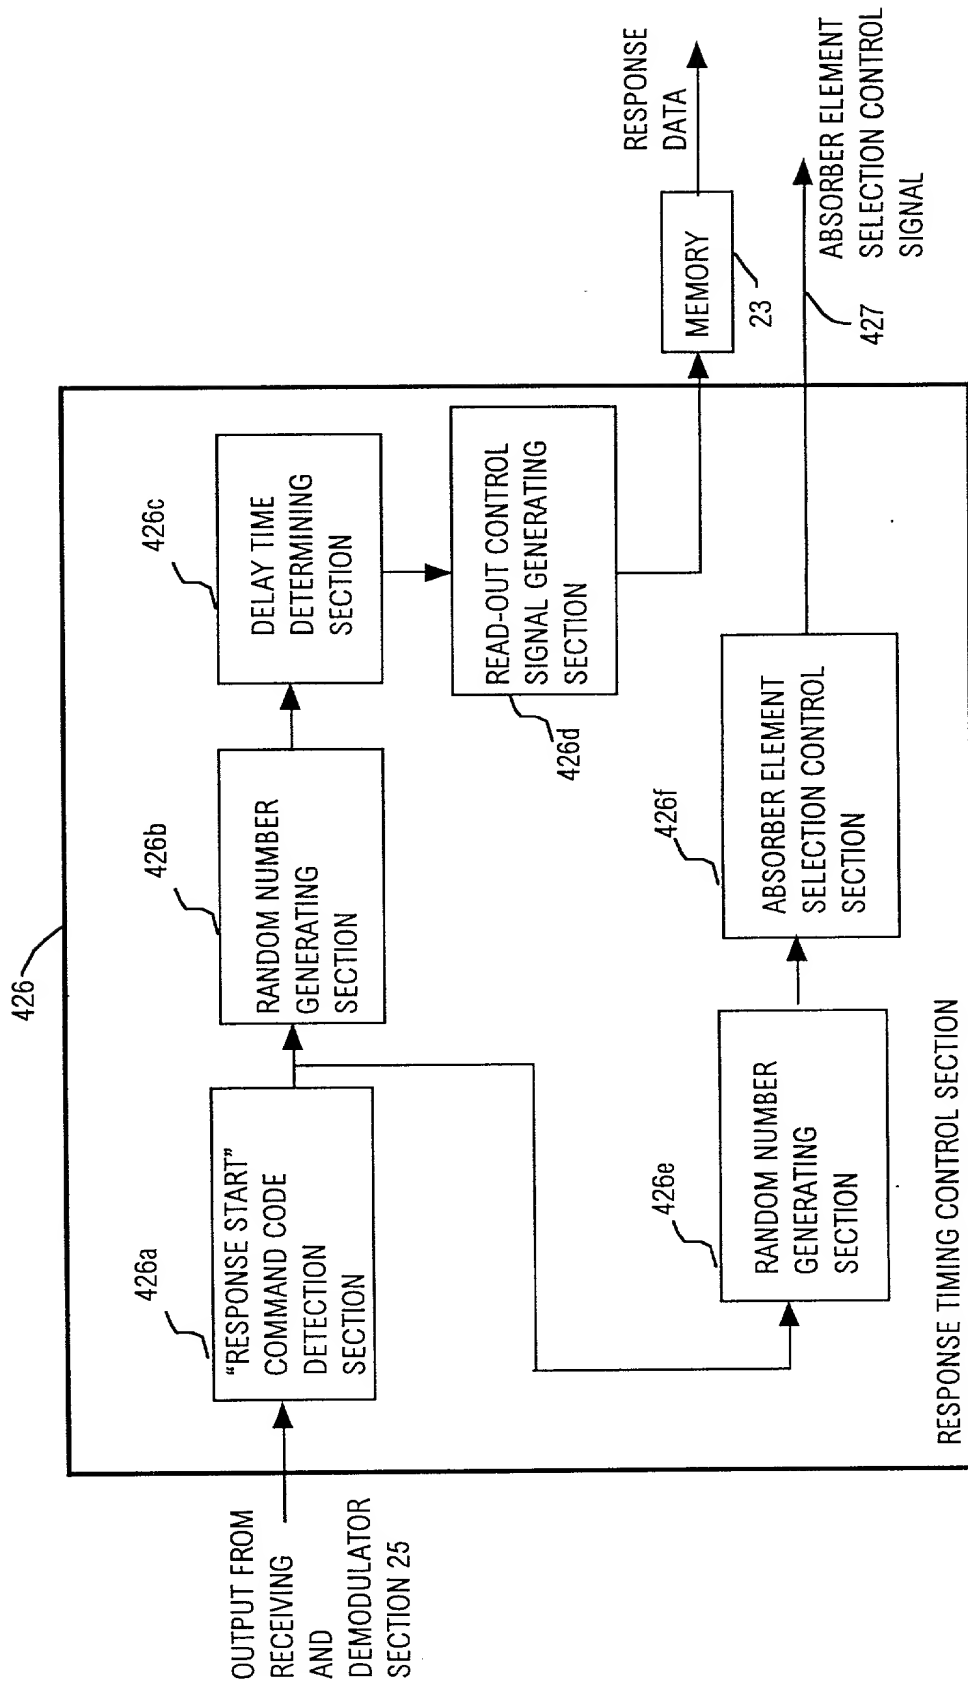


FIG. 39

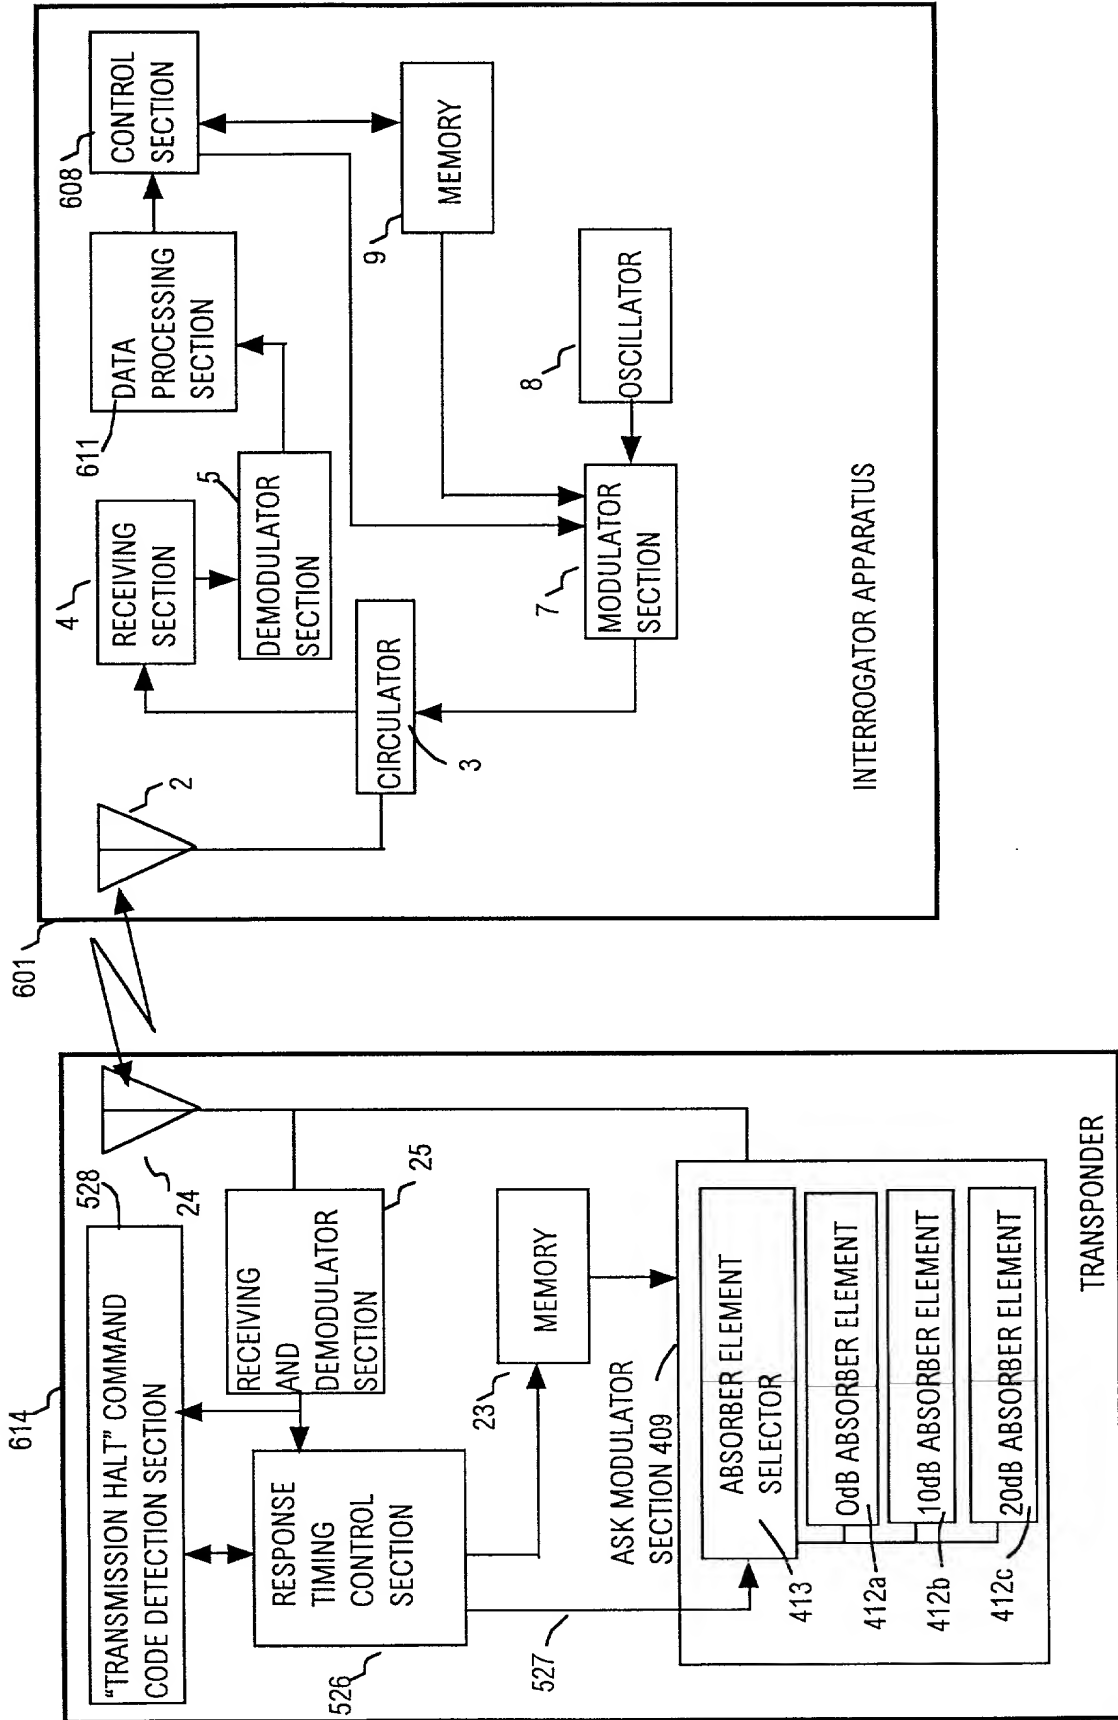


FIG. 40

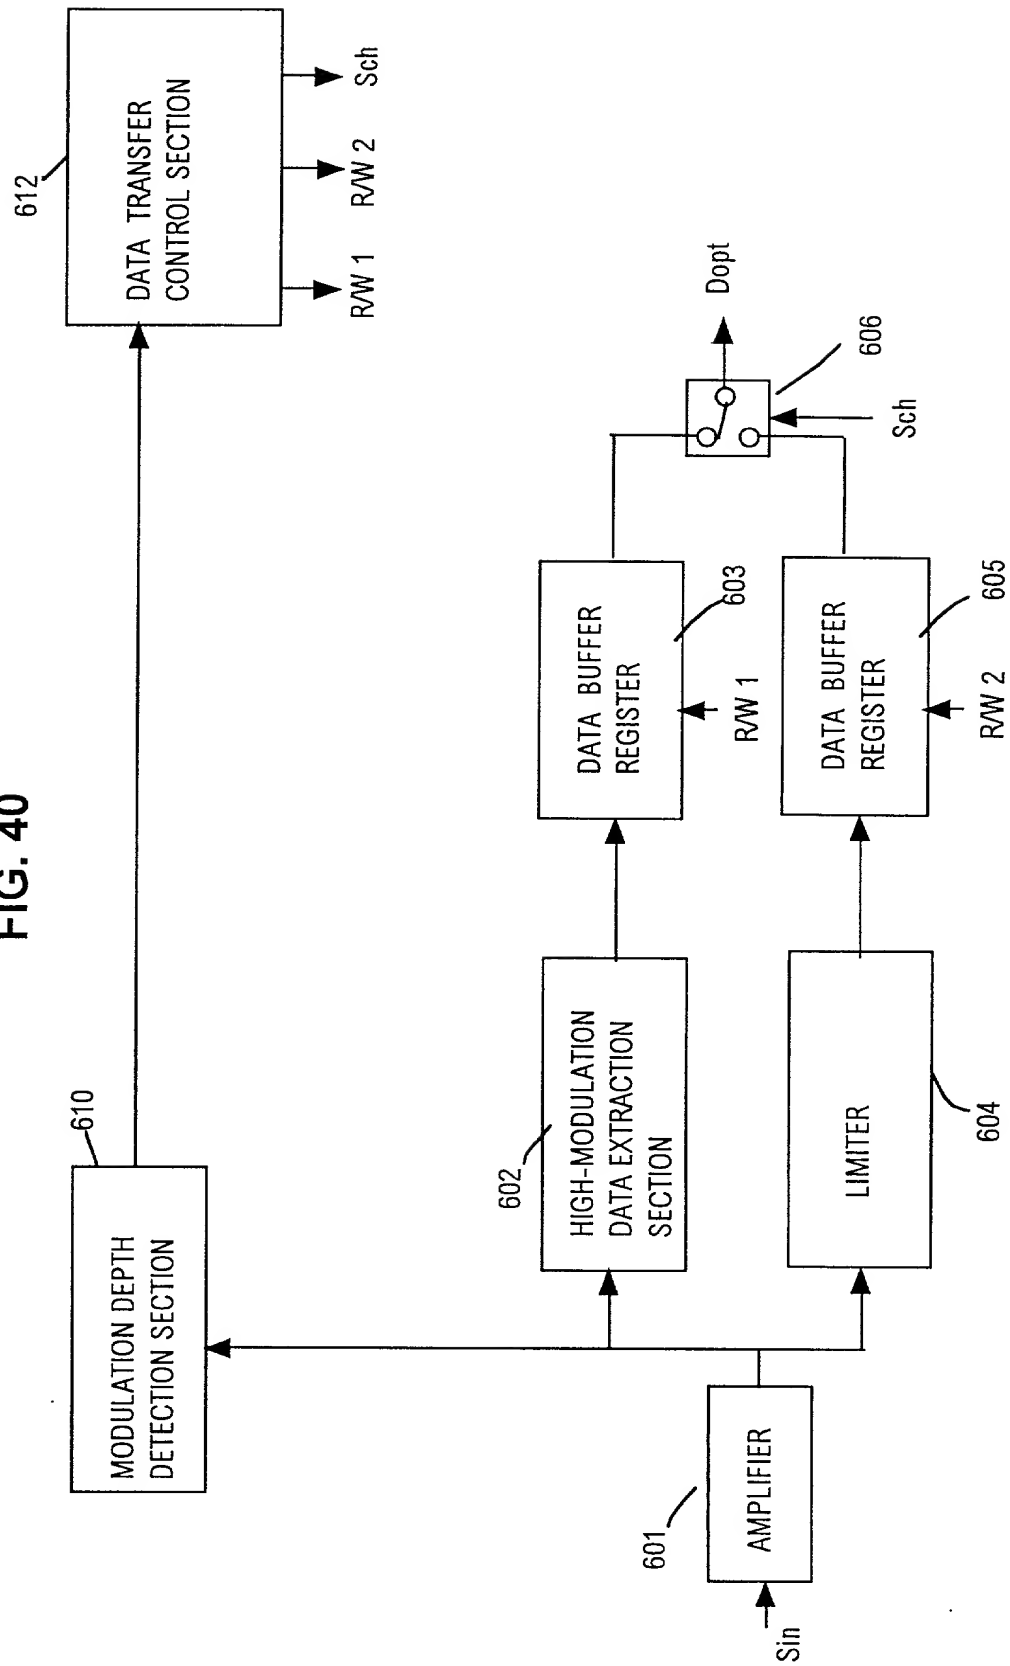


FIG. 41

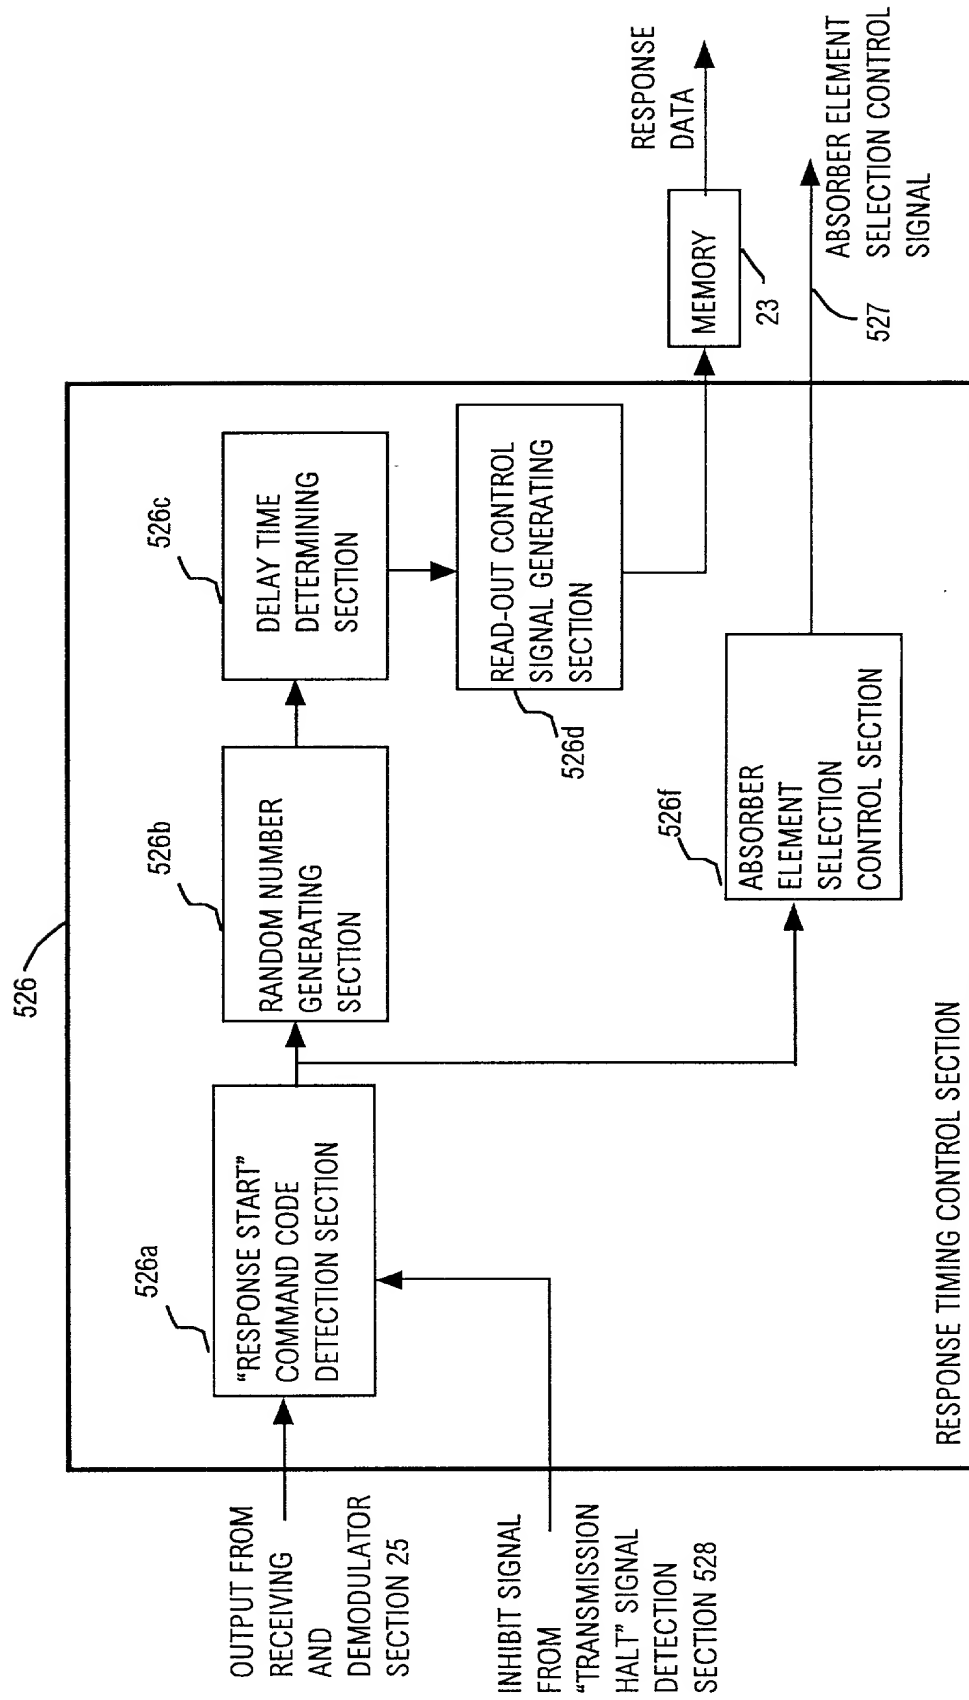


FIG. 42

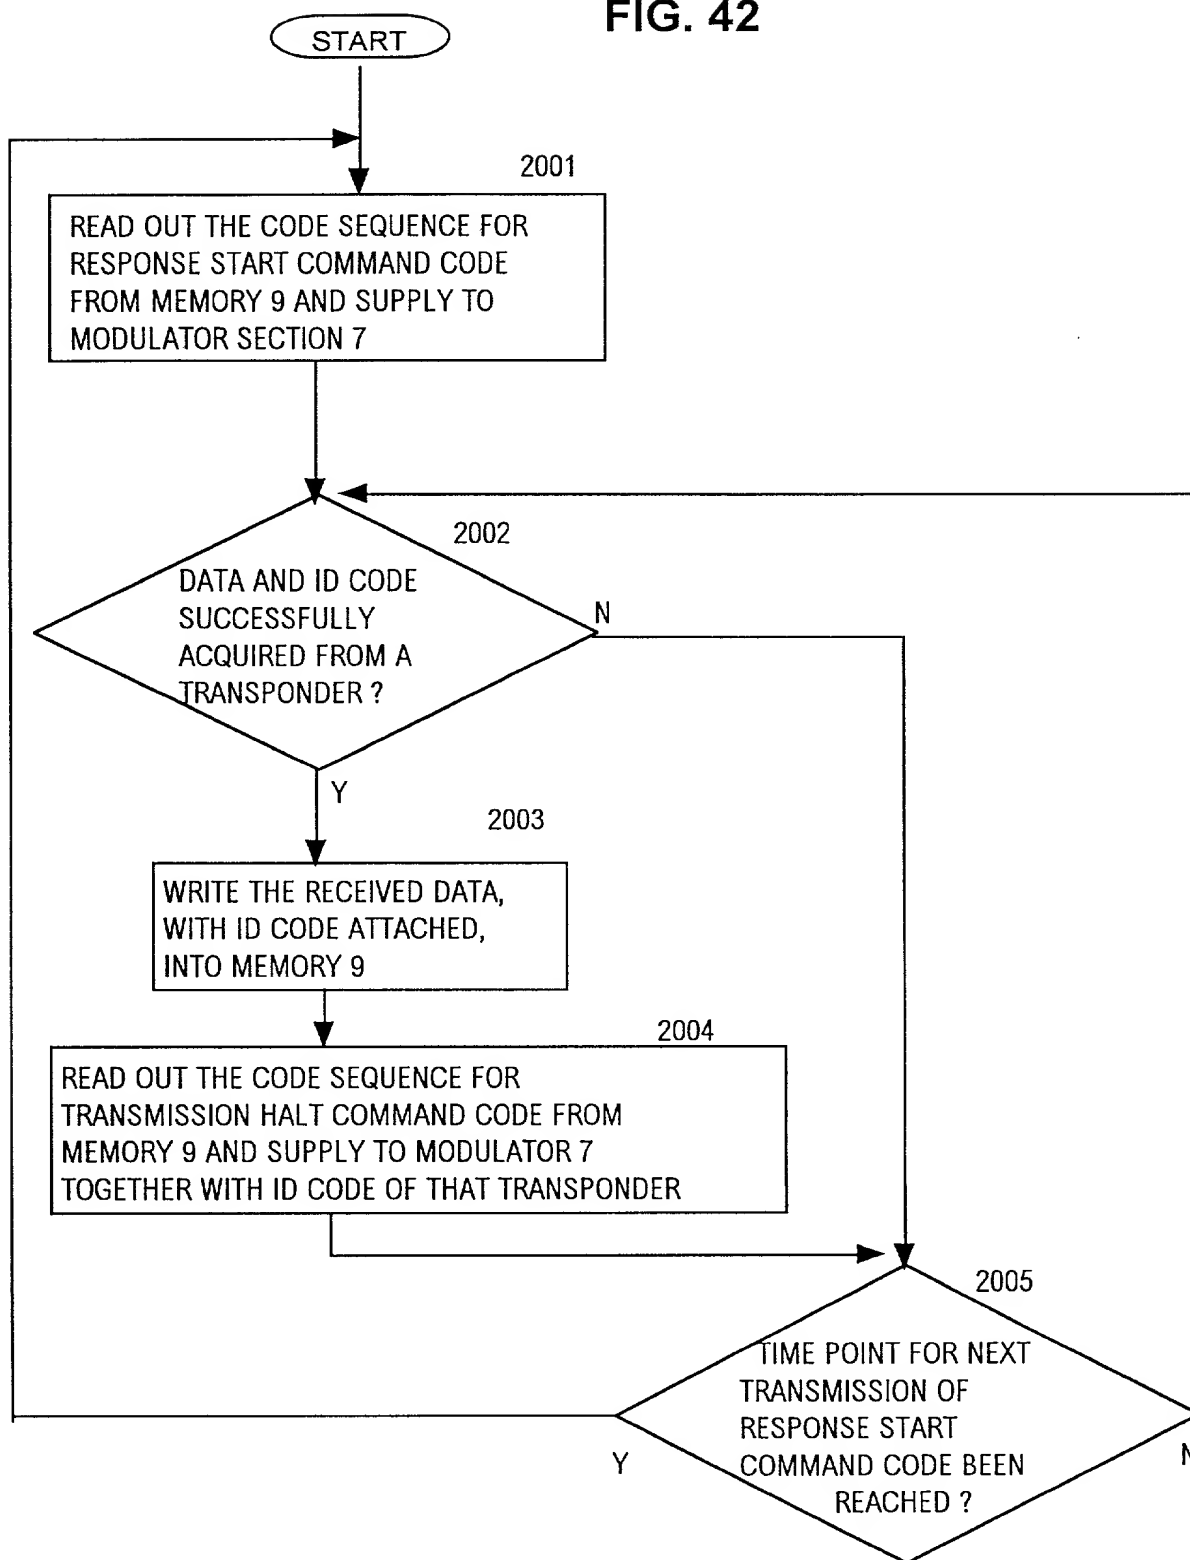


FIG. 43

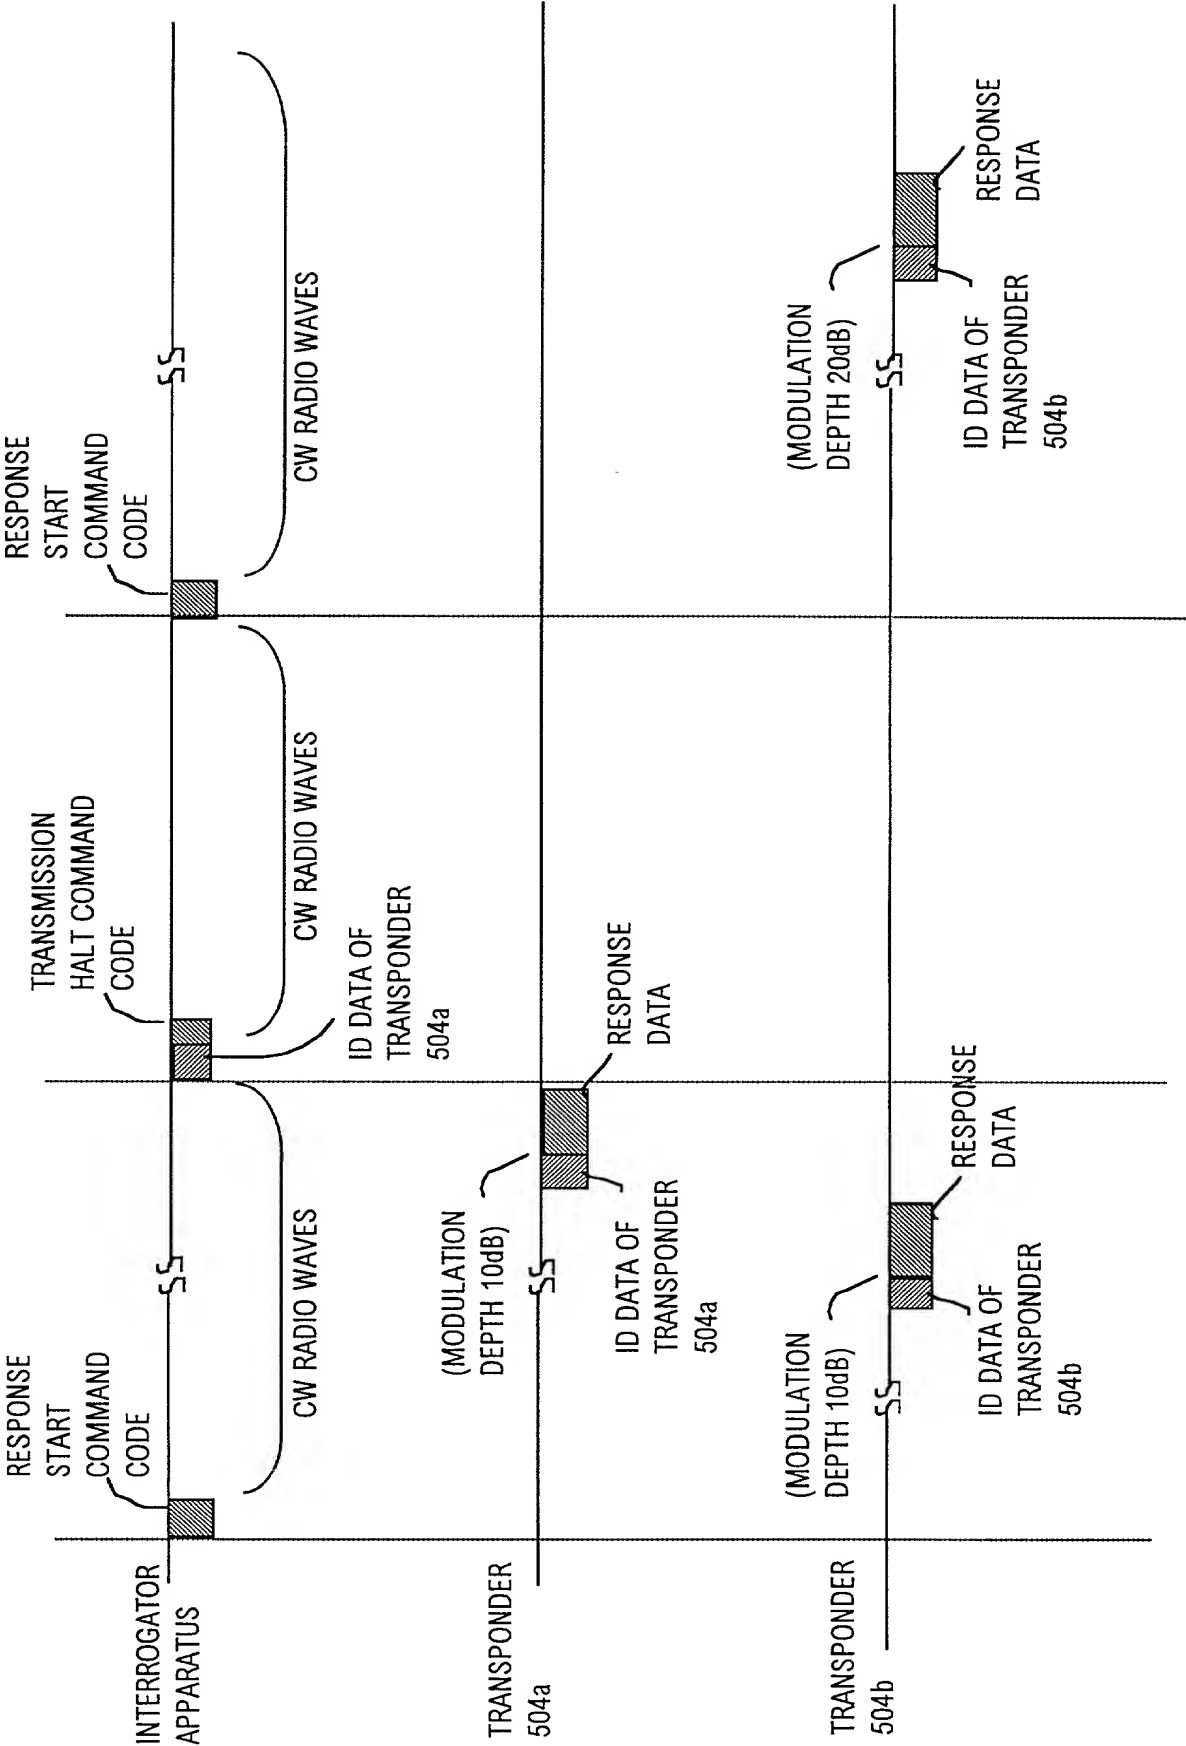


FIG. 45

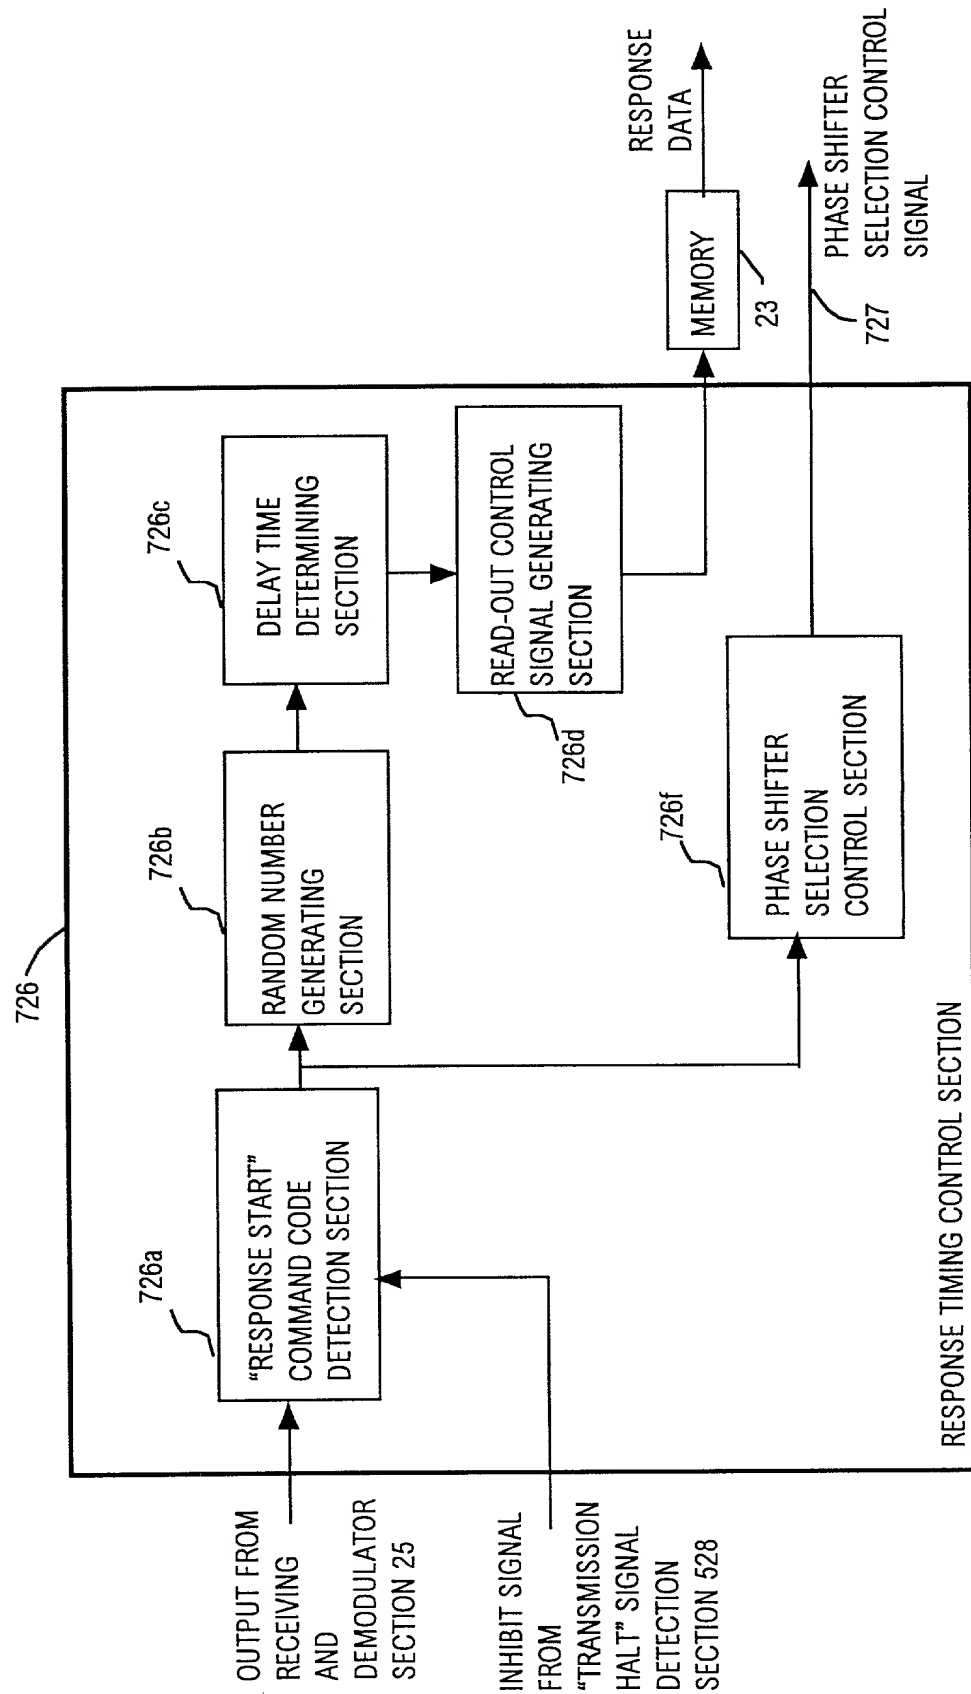


FIG. 46

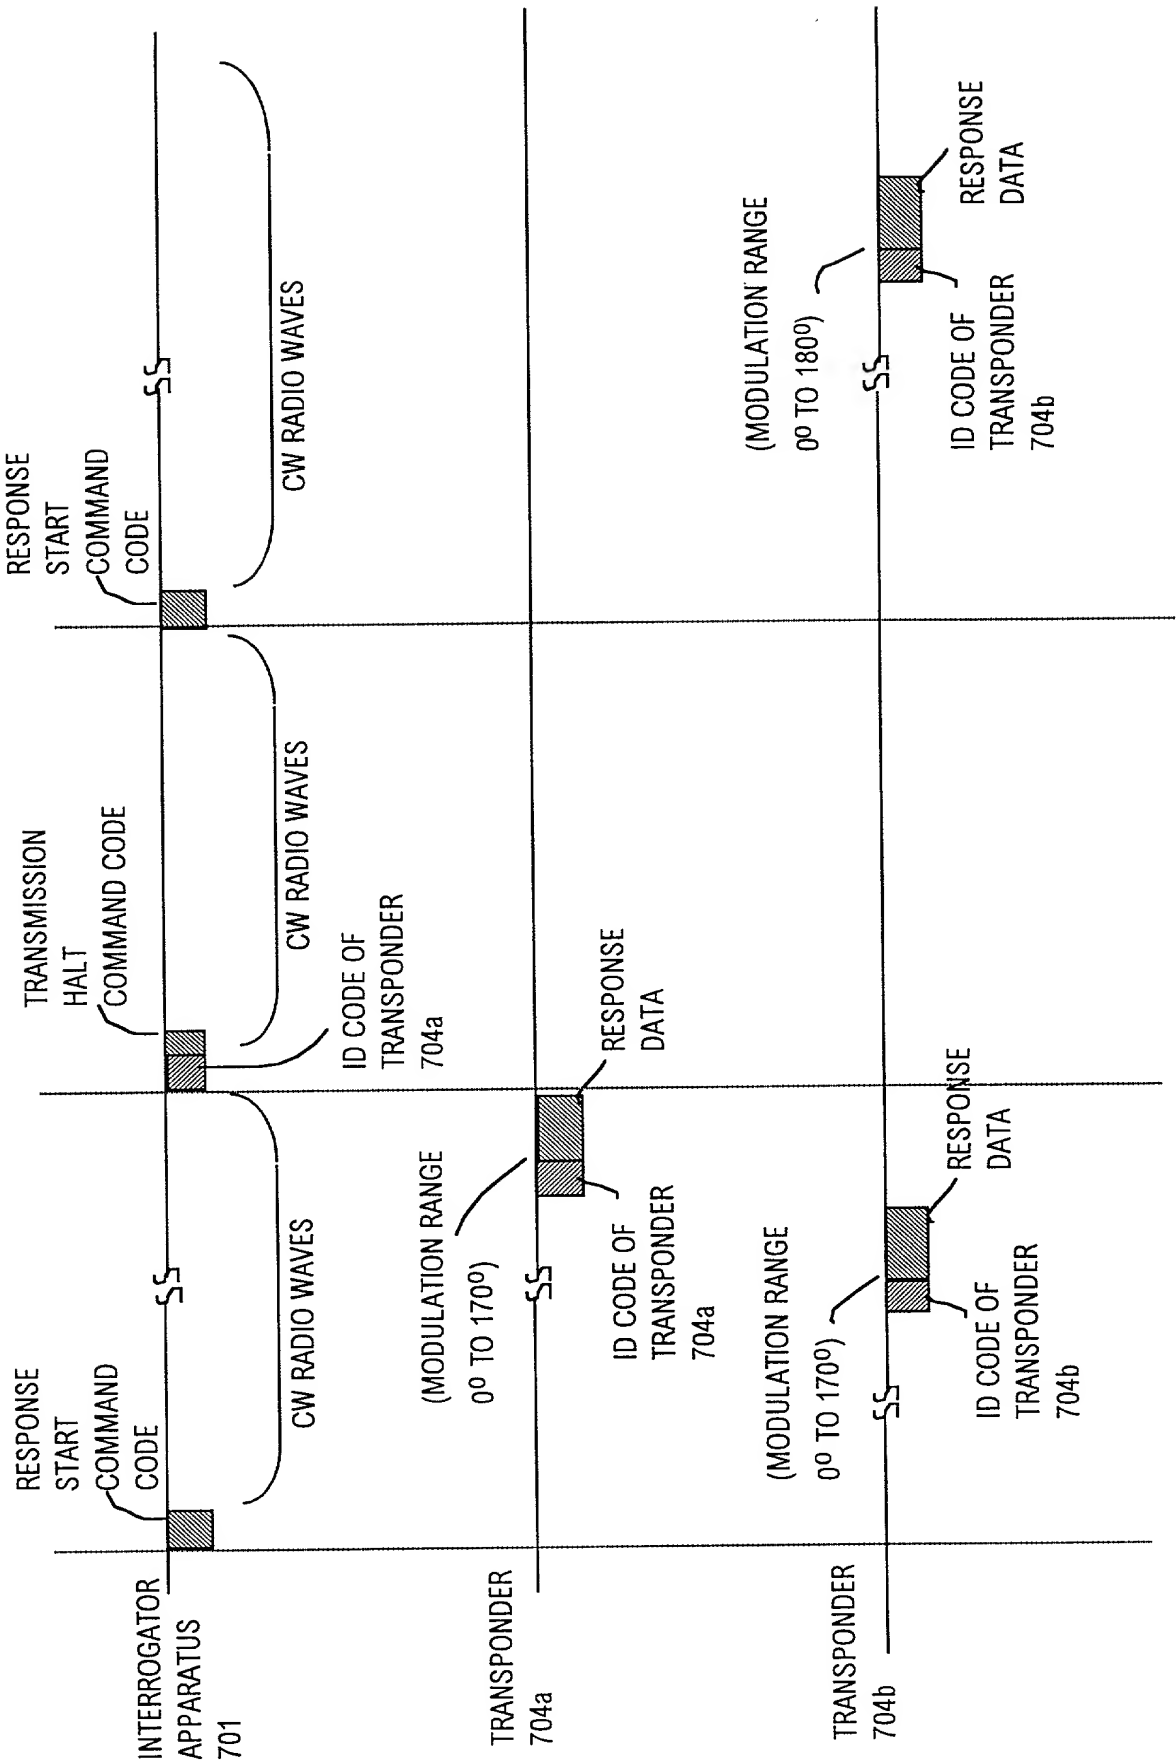


FIG. 47

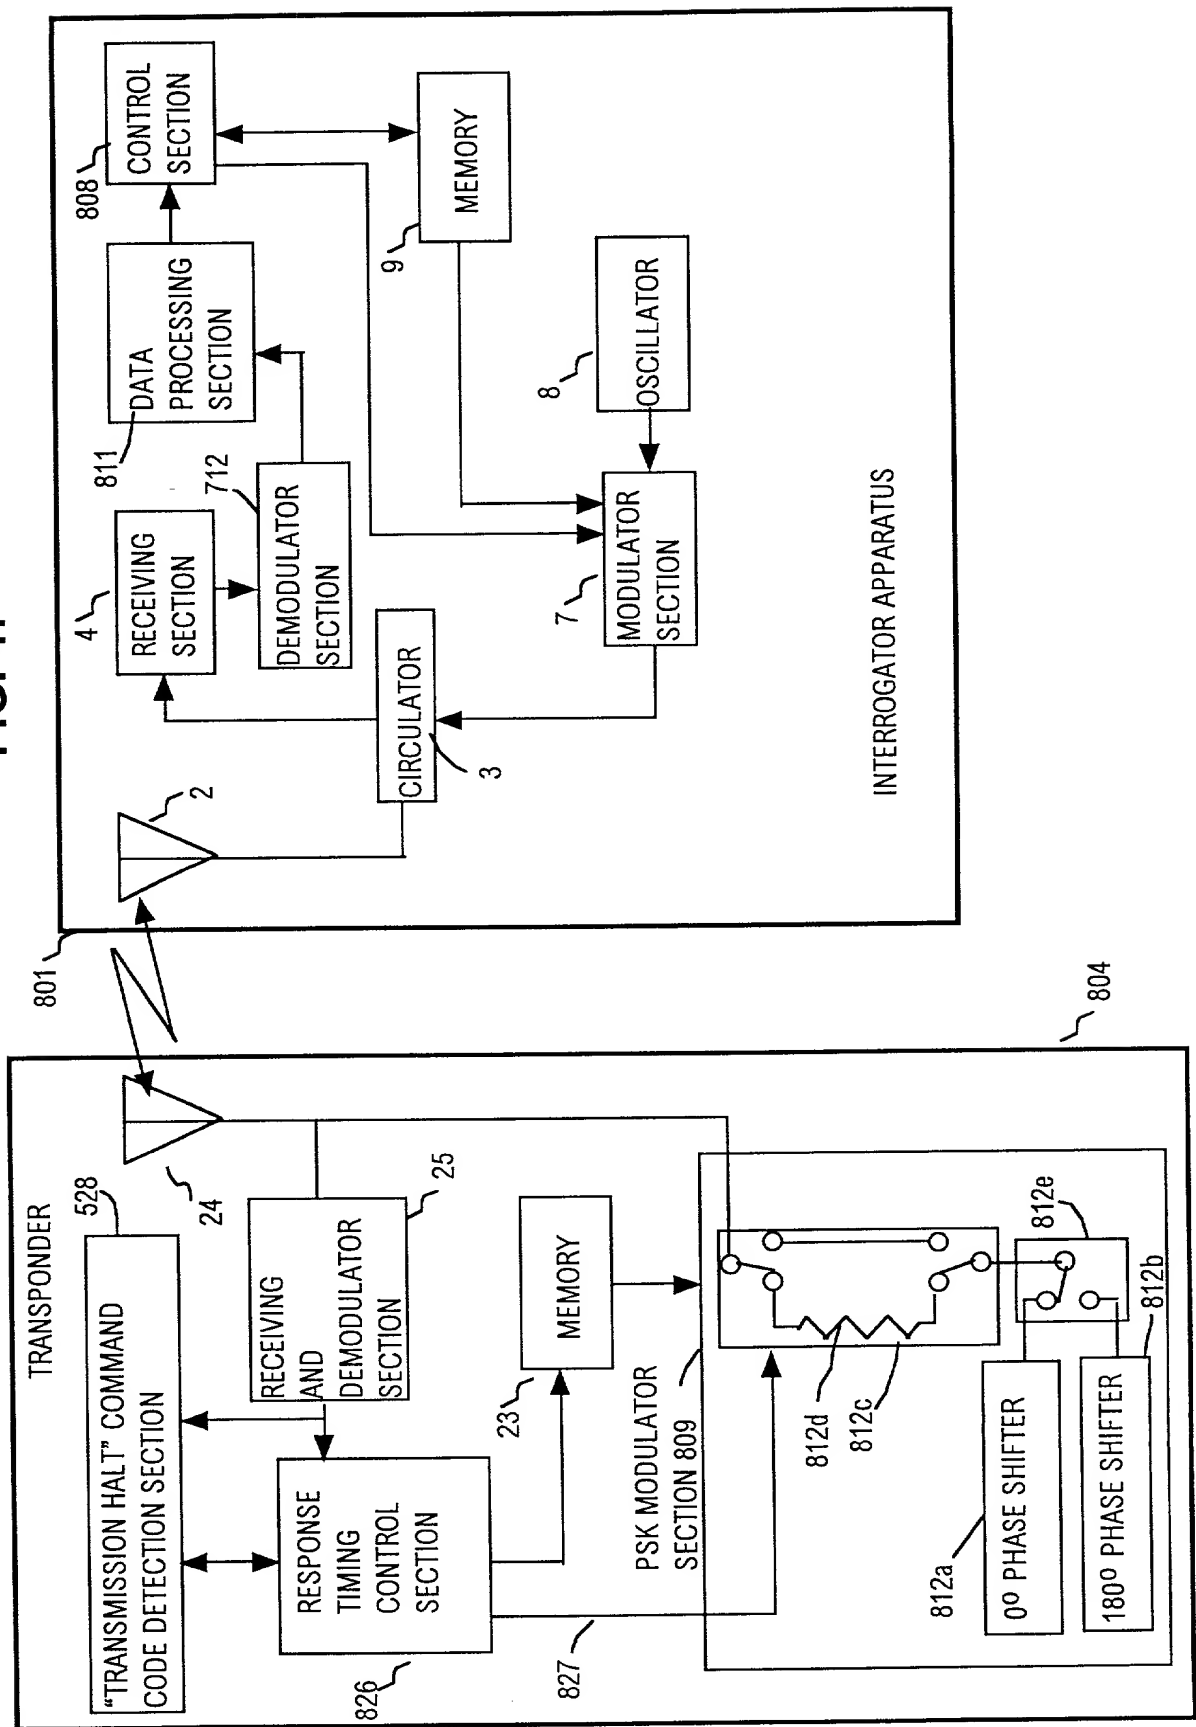


FIG. 48

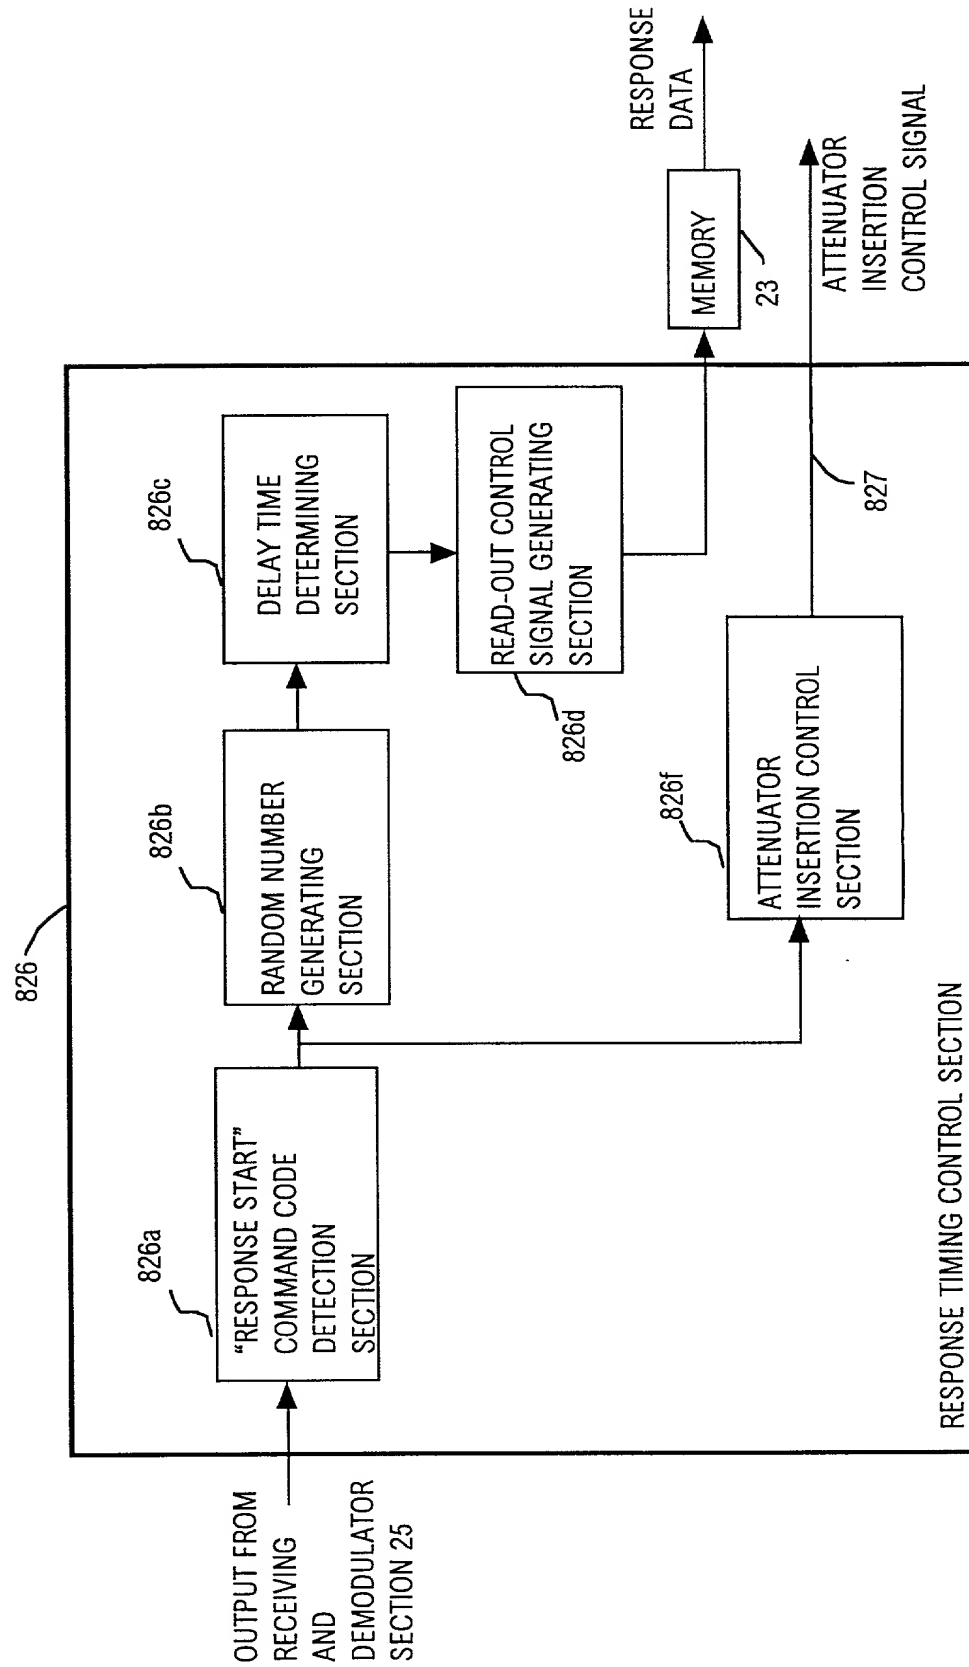


FIG. 49

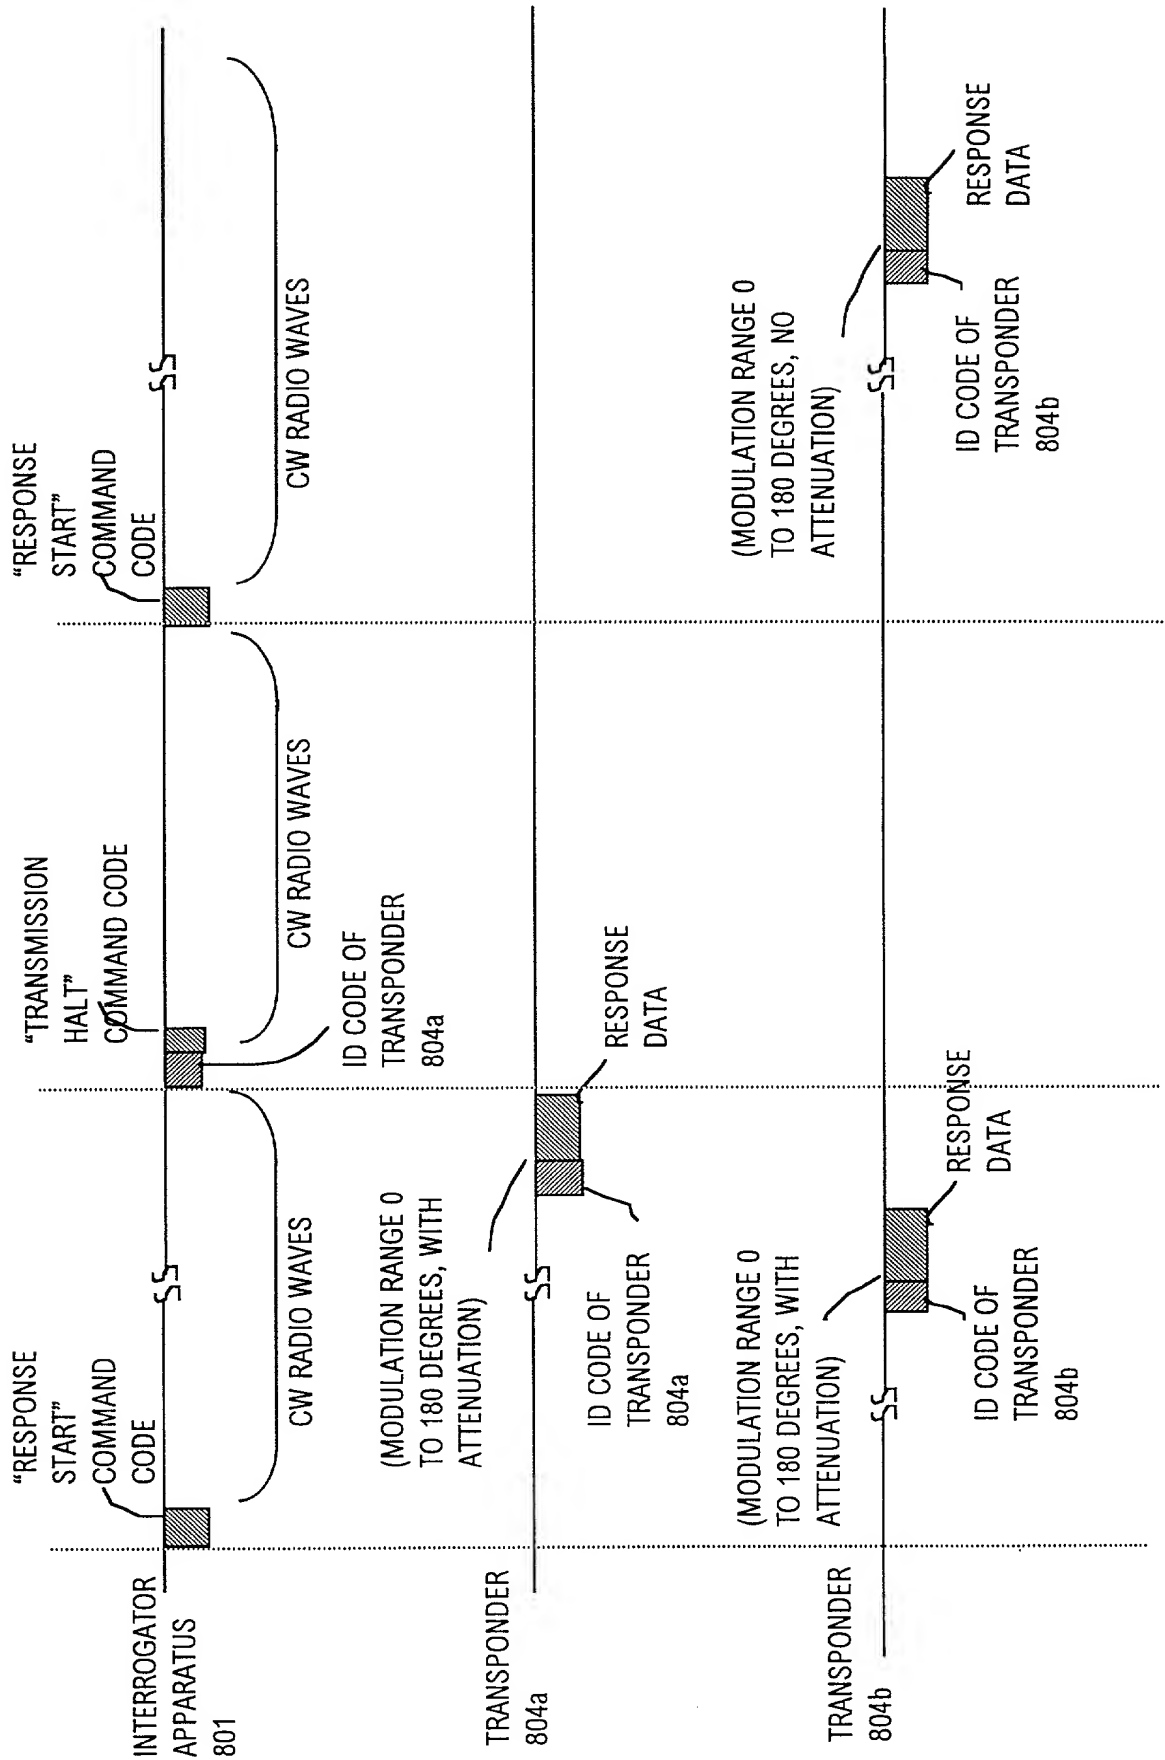


FIG. 50

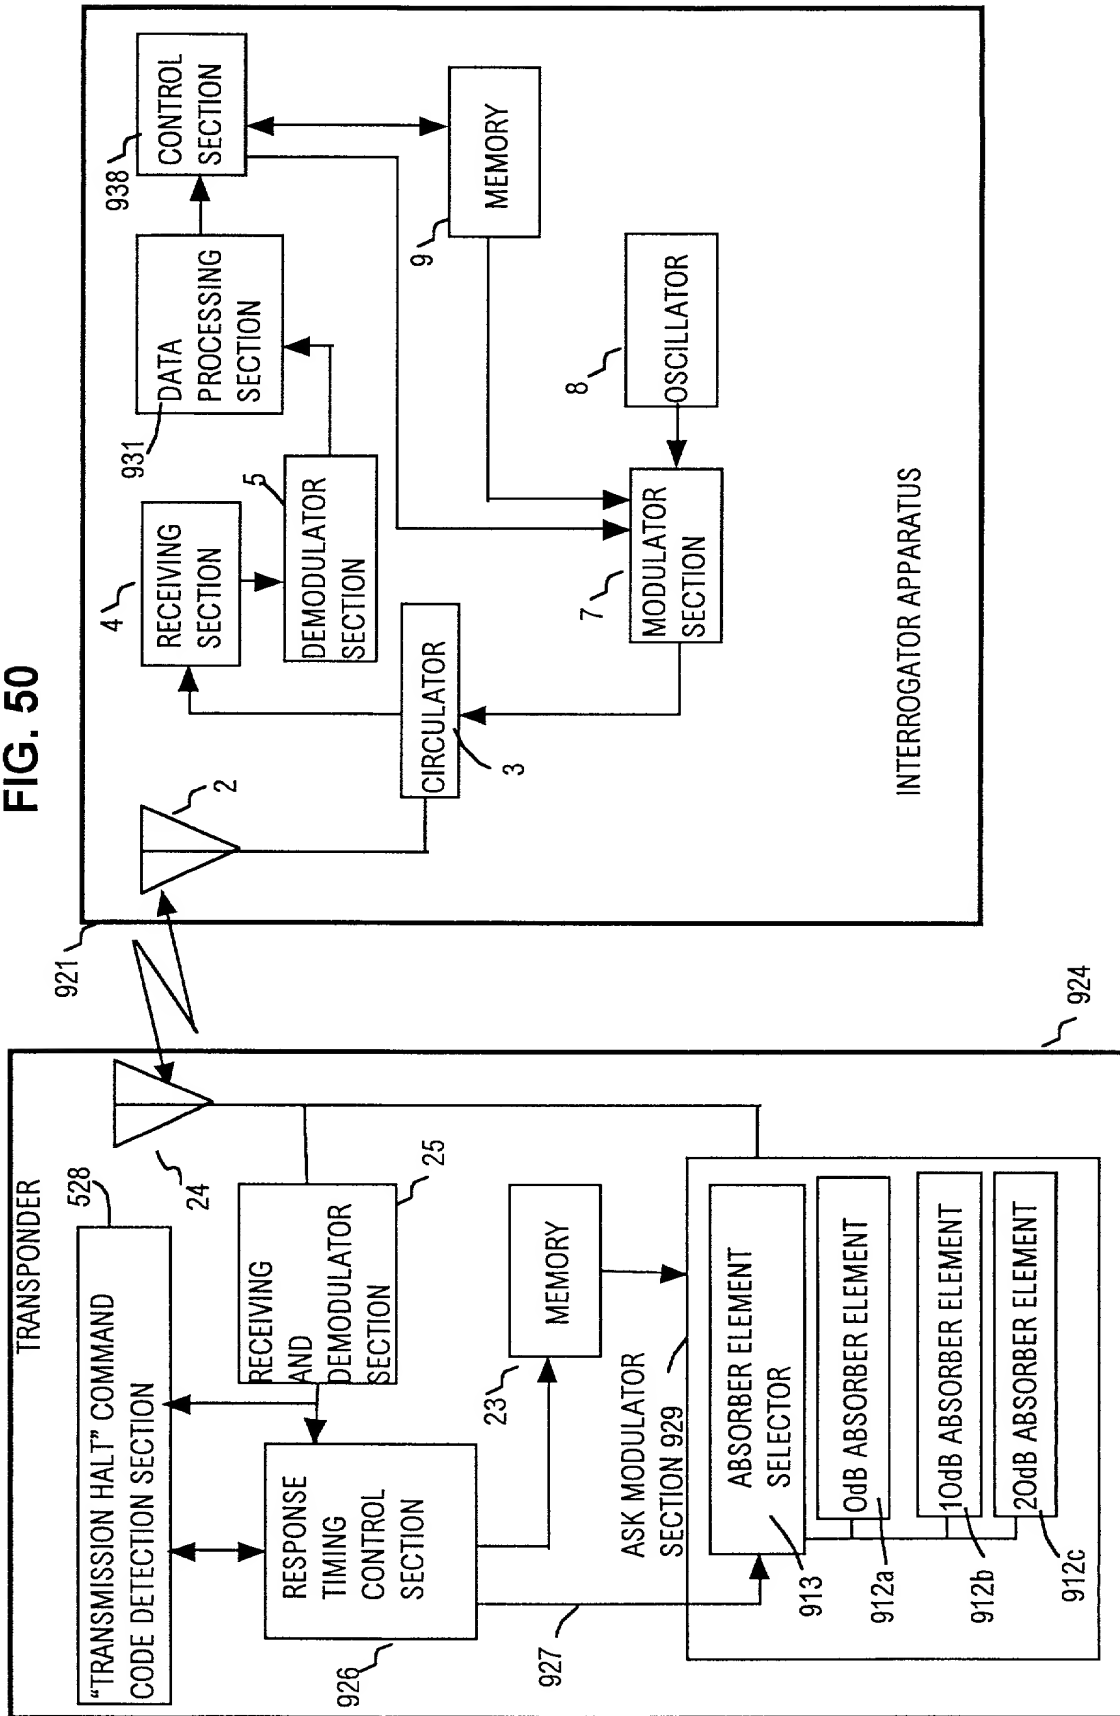
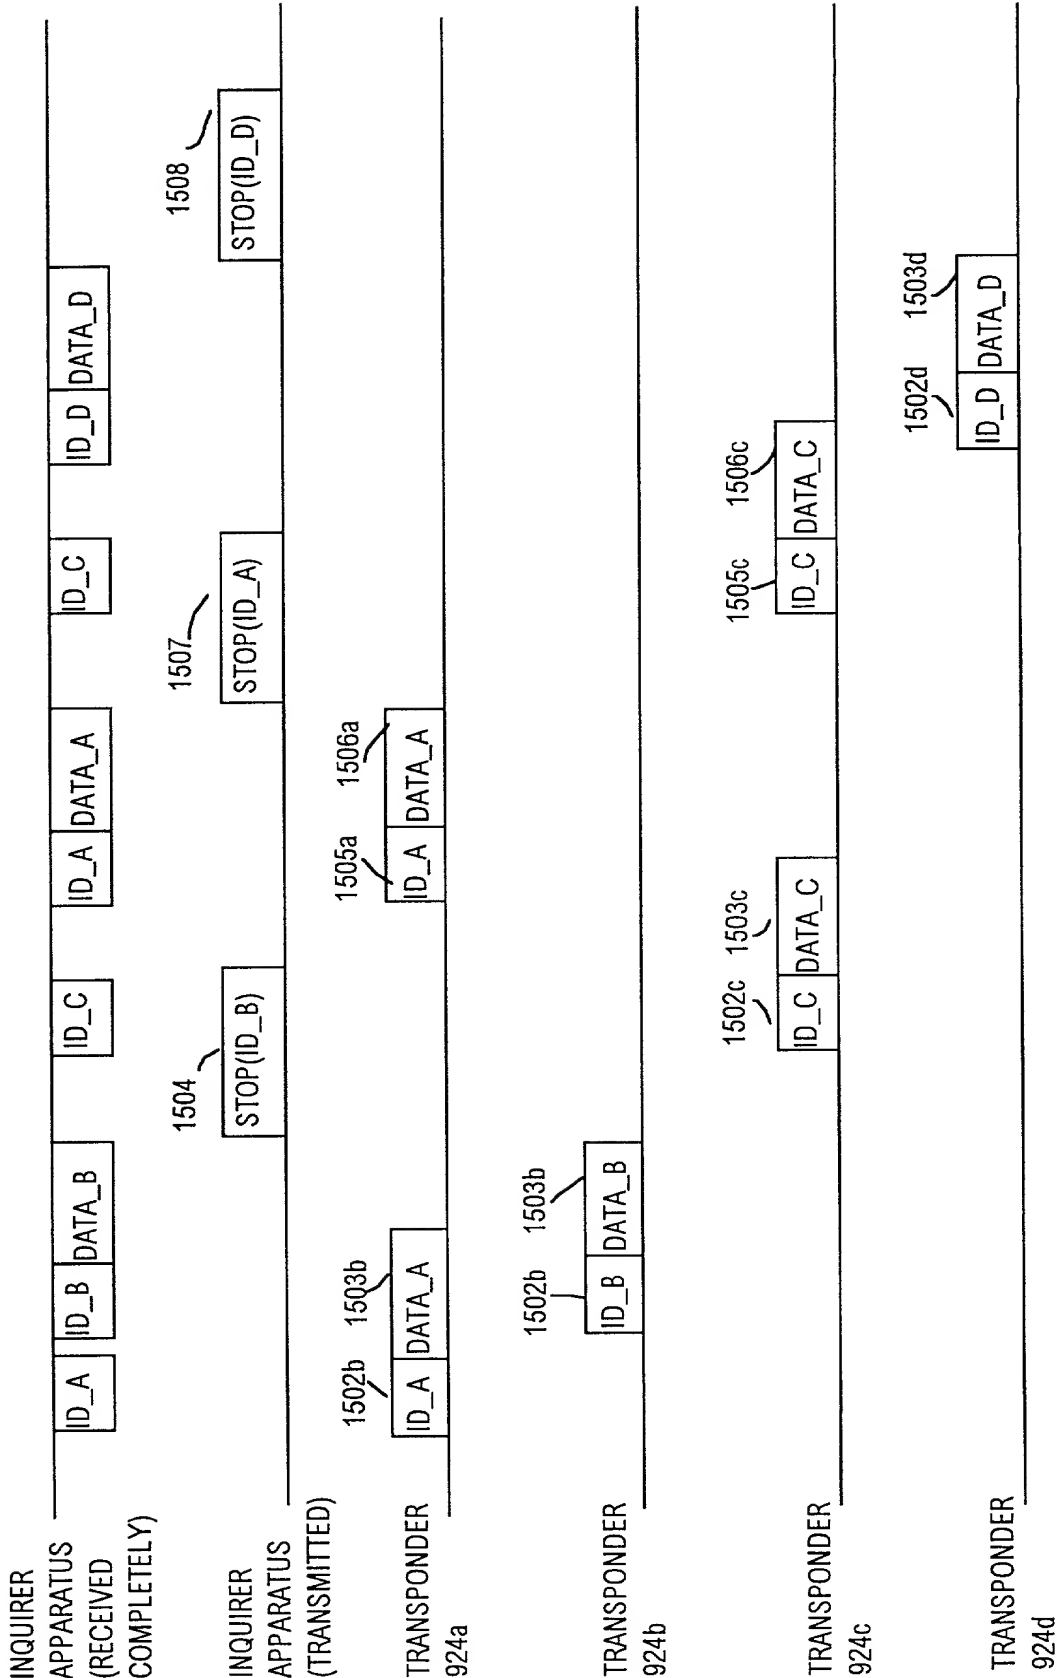


FIG 51



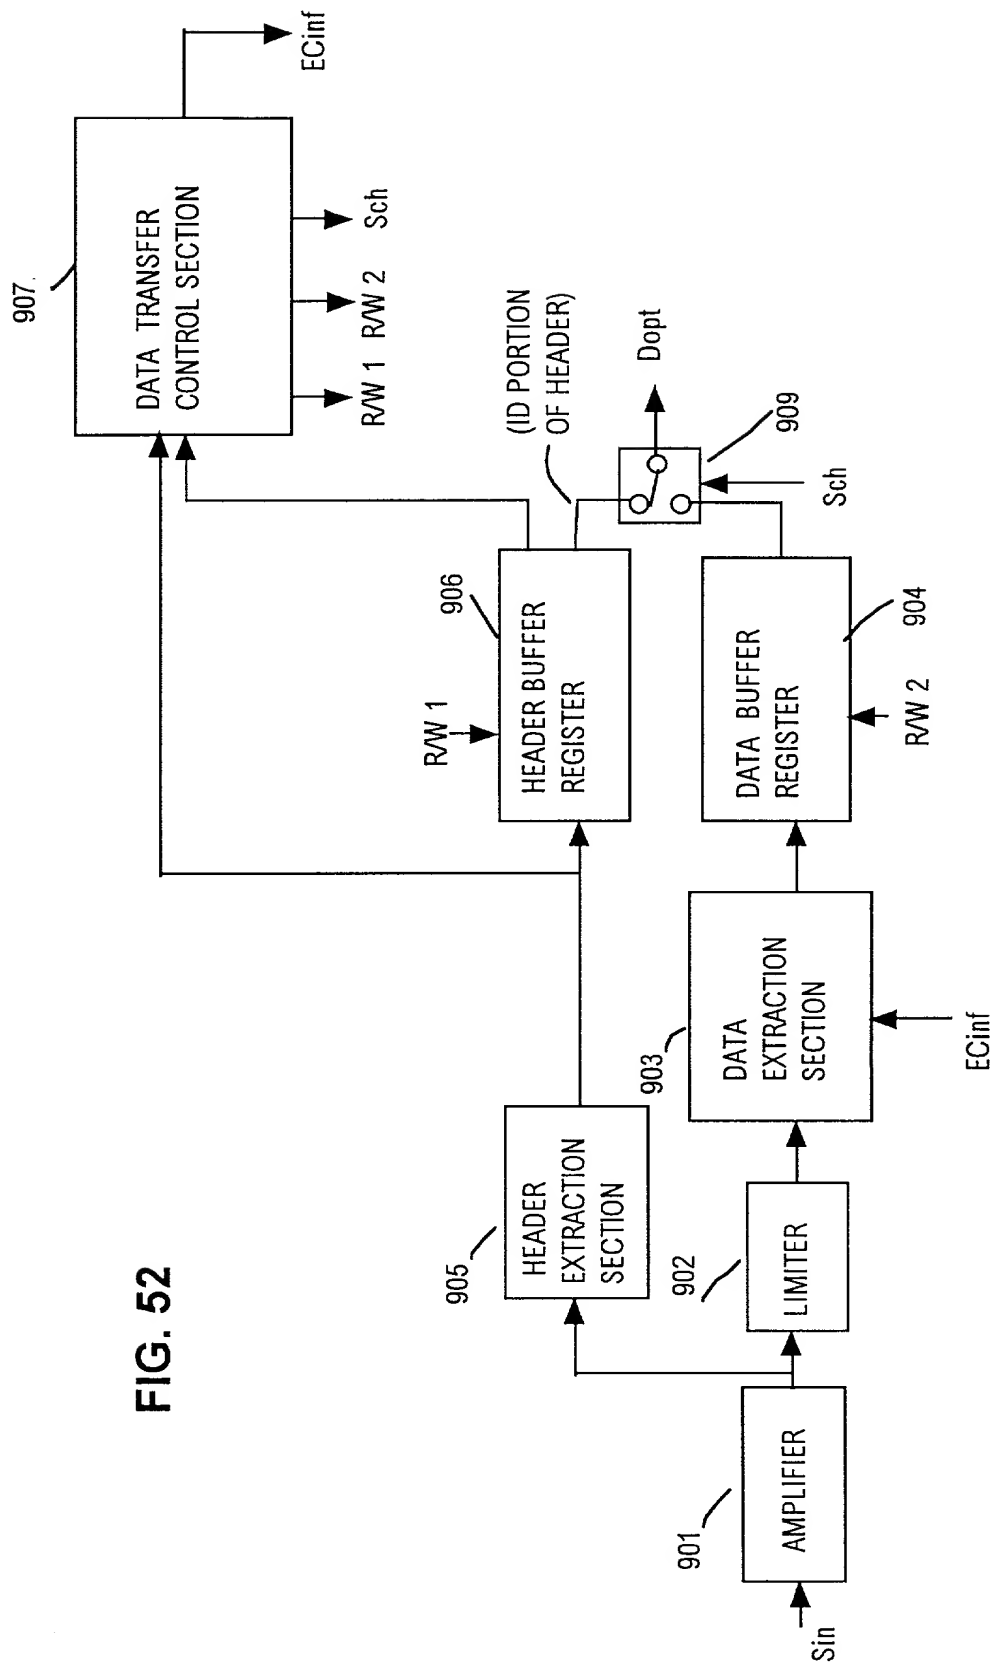


FIG. 53

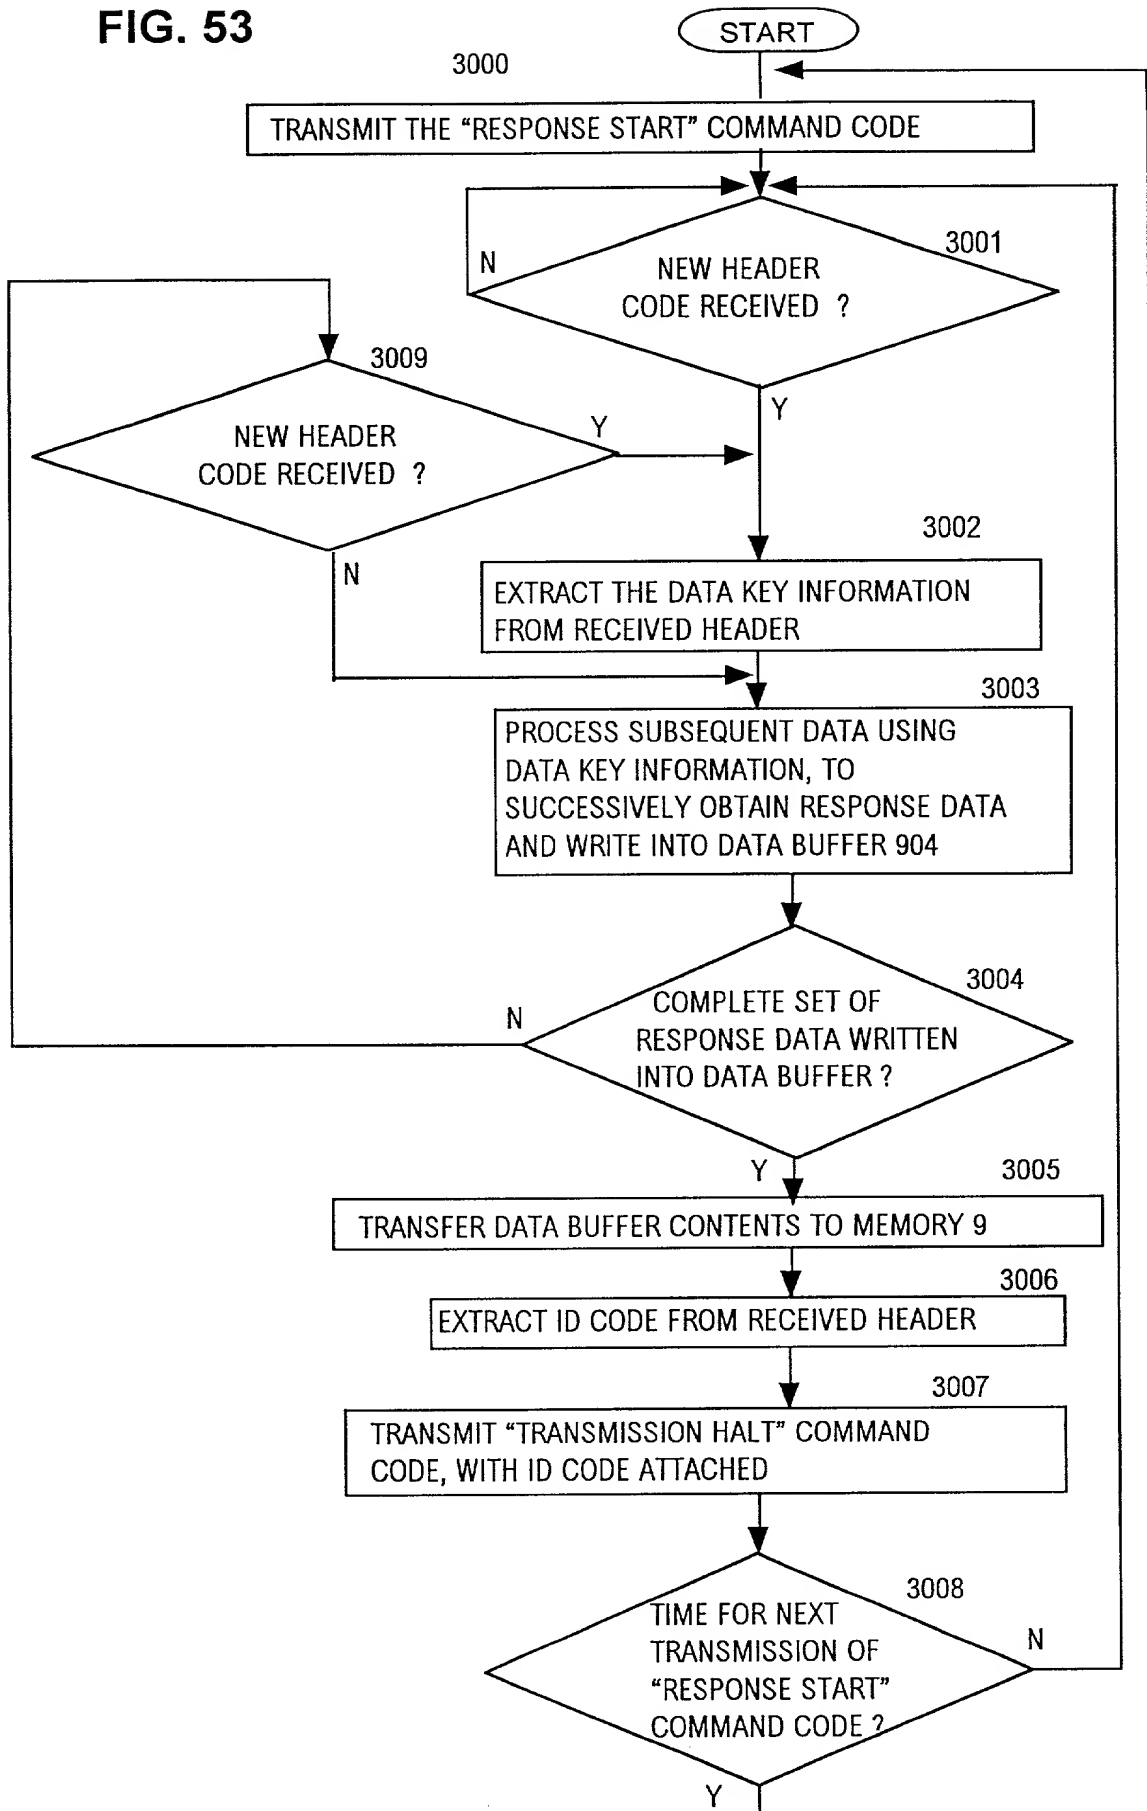


FIG. 54

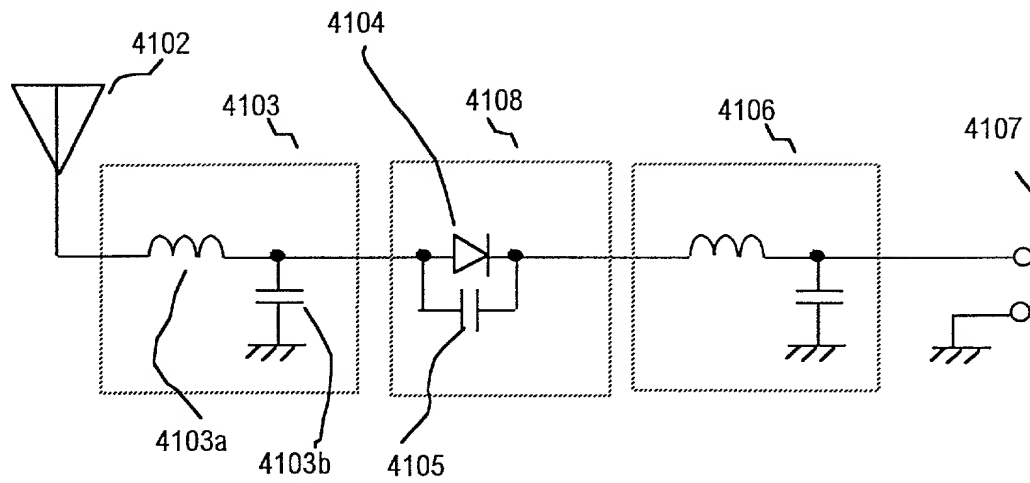


FIG. 55

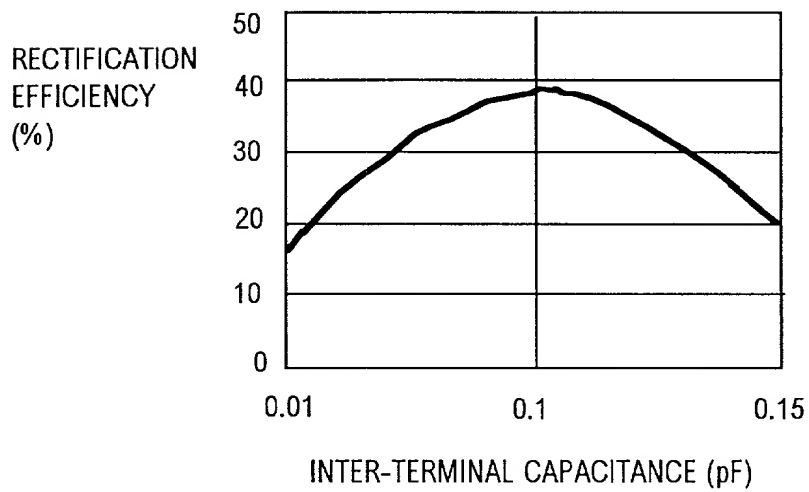


FIG. 56

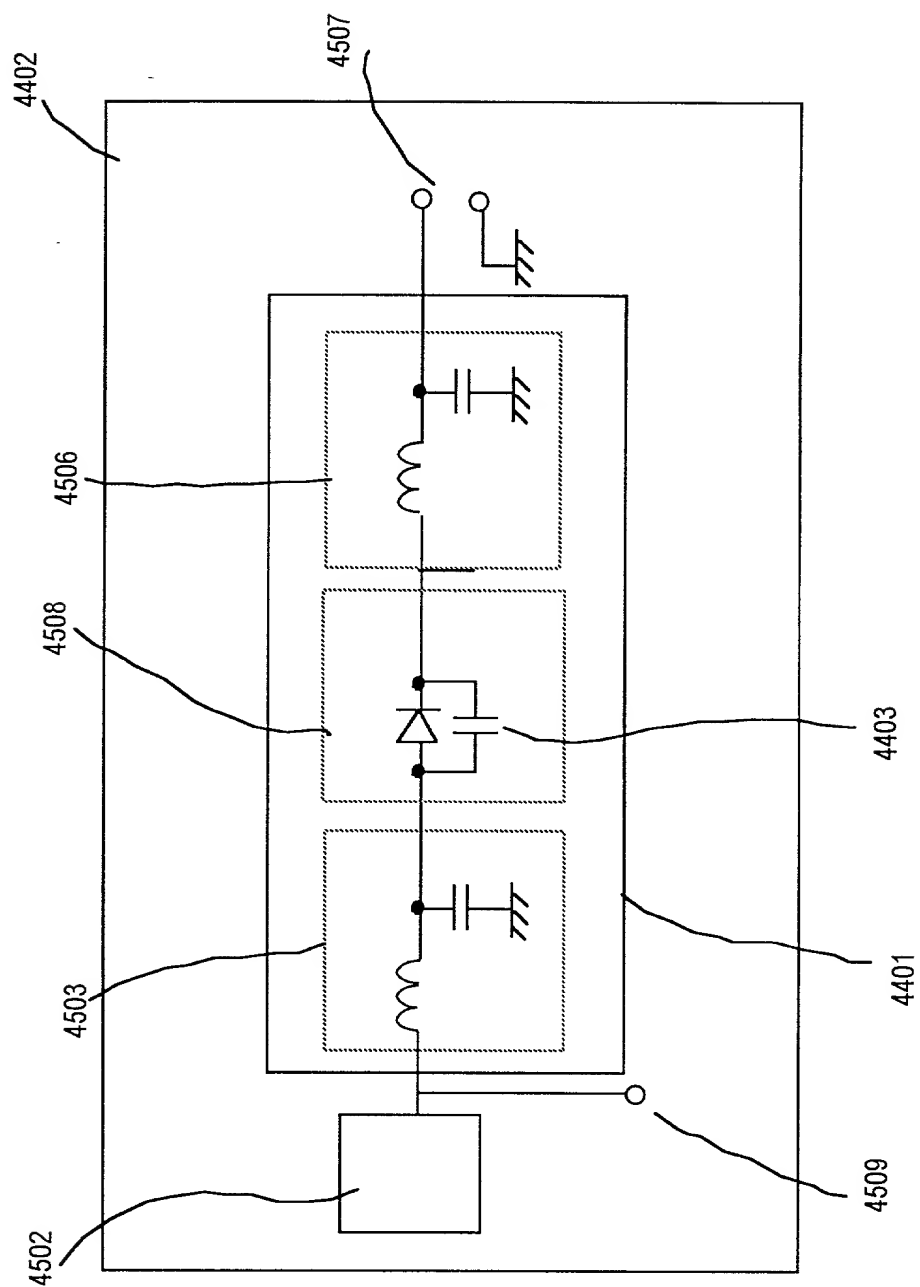


FIG. 57

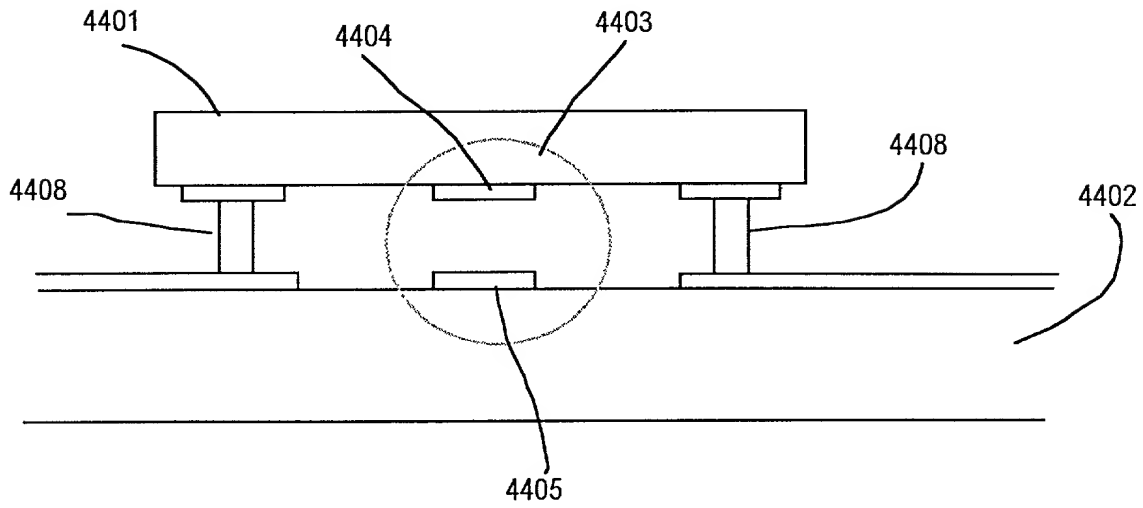


FIG. 58

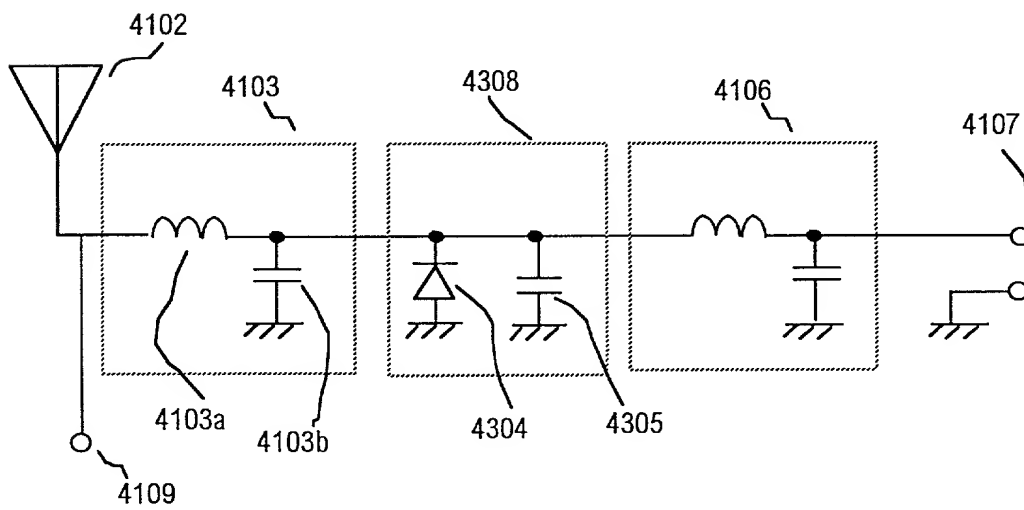


FIG. 59

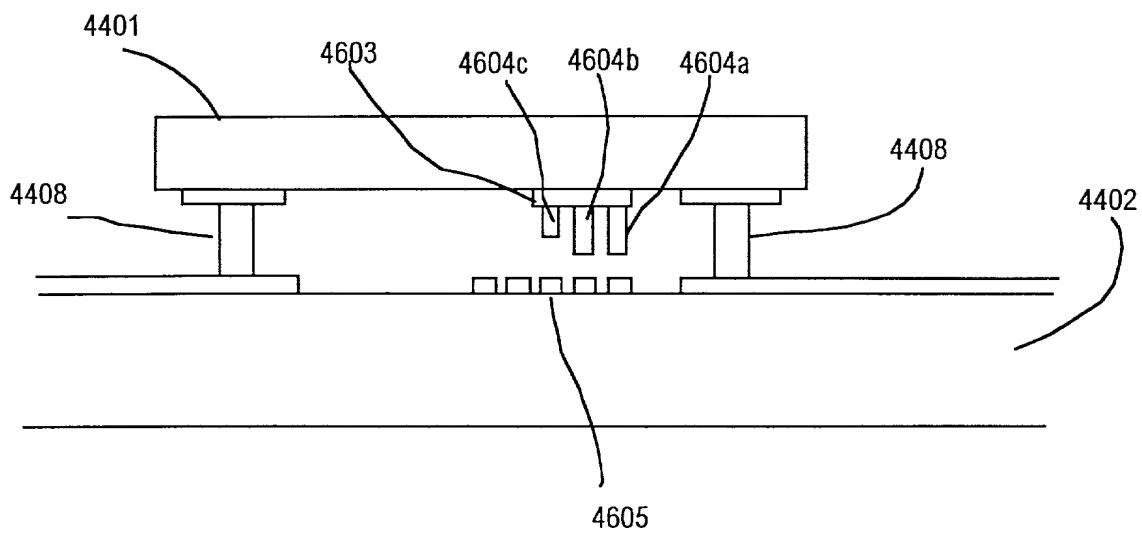


FIG. 60

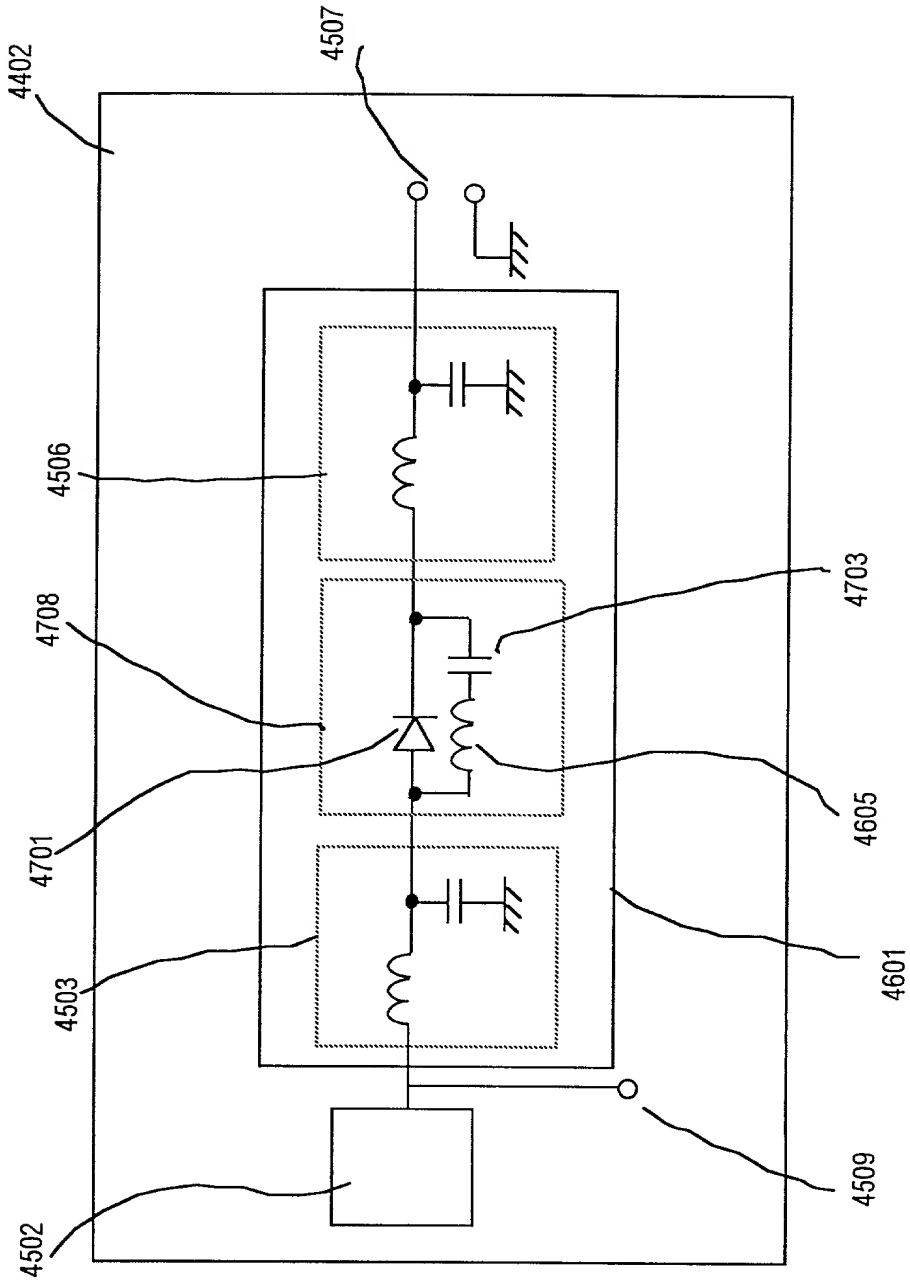


FIG. 61

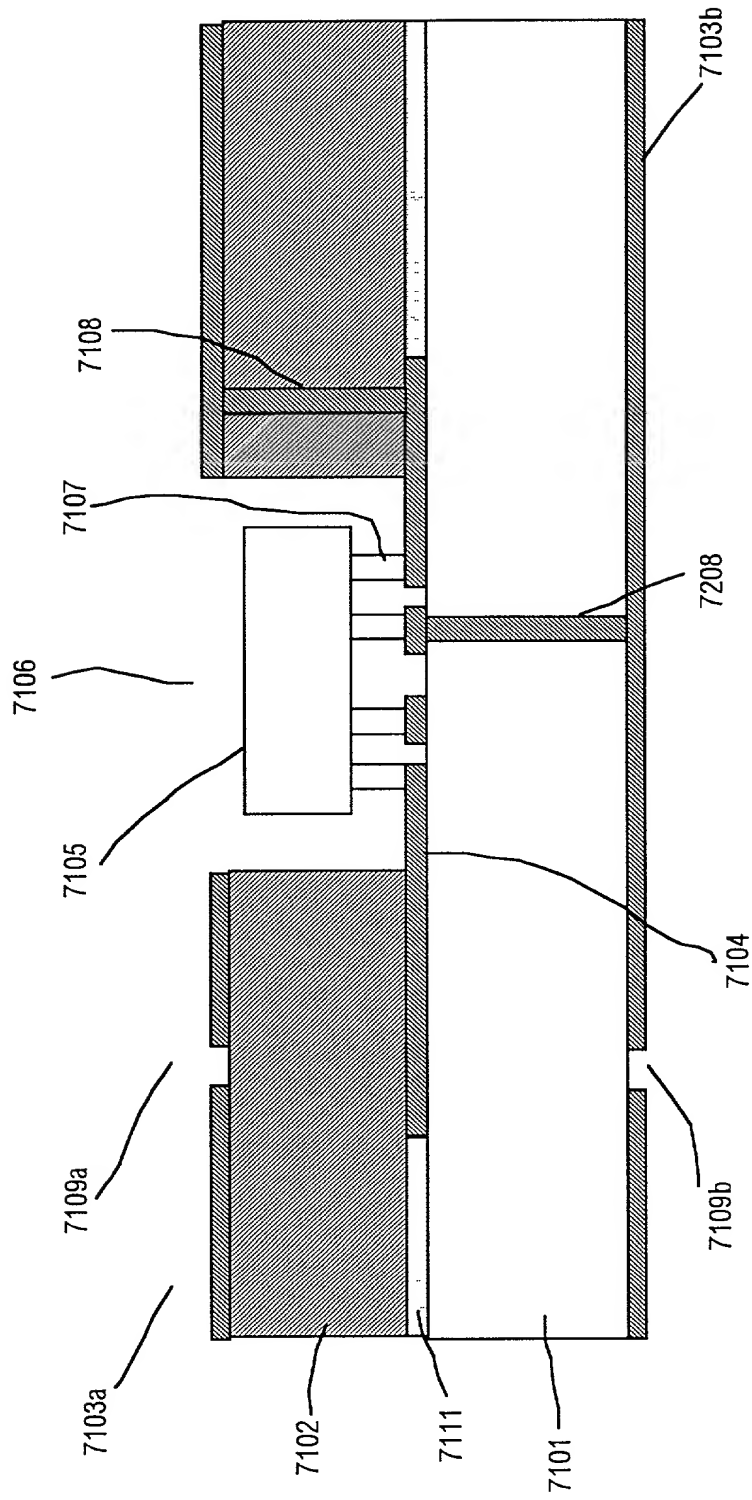


FIG. 62

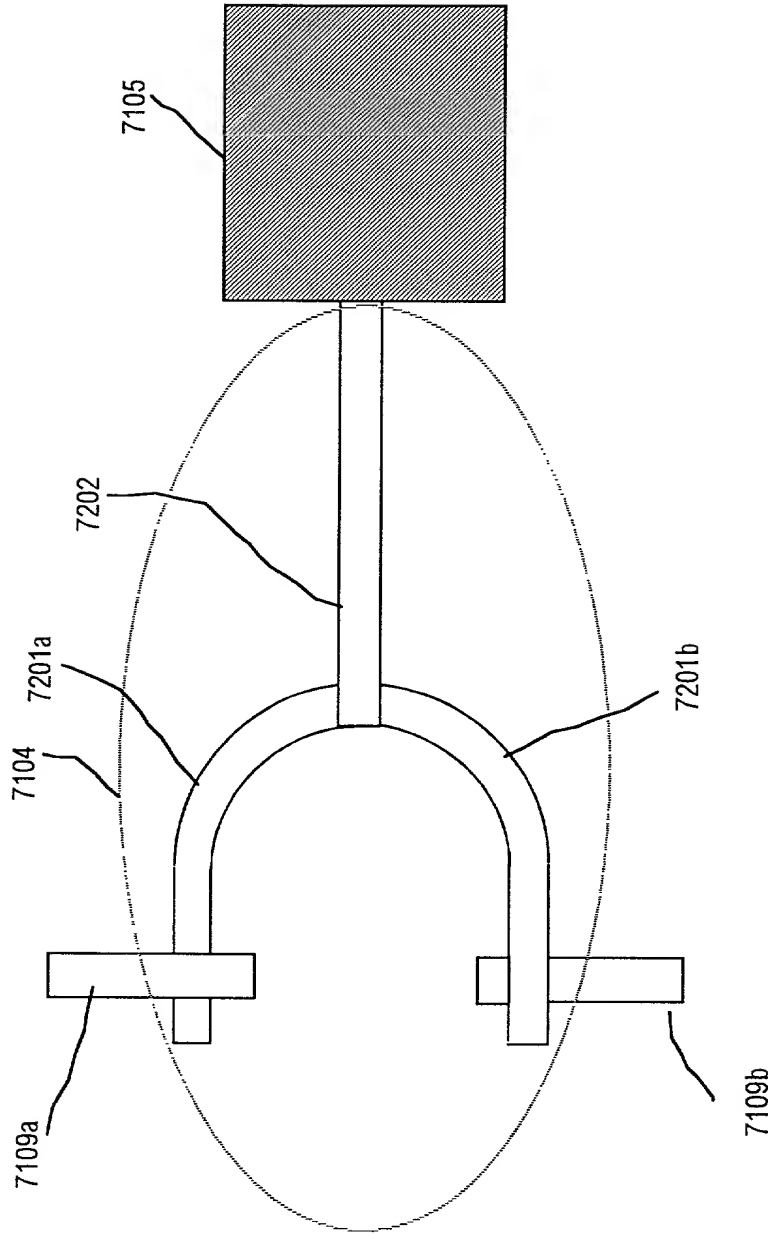


FIG. 63

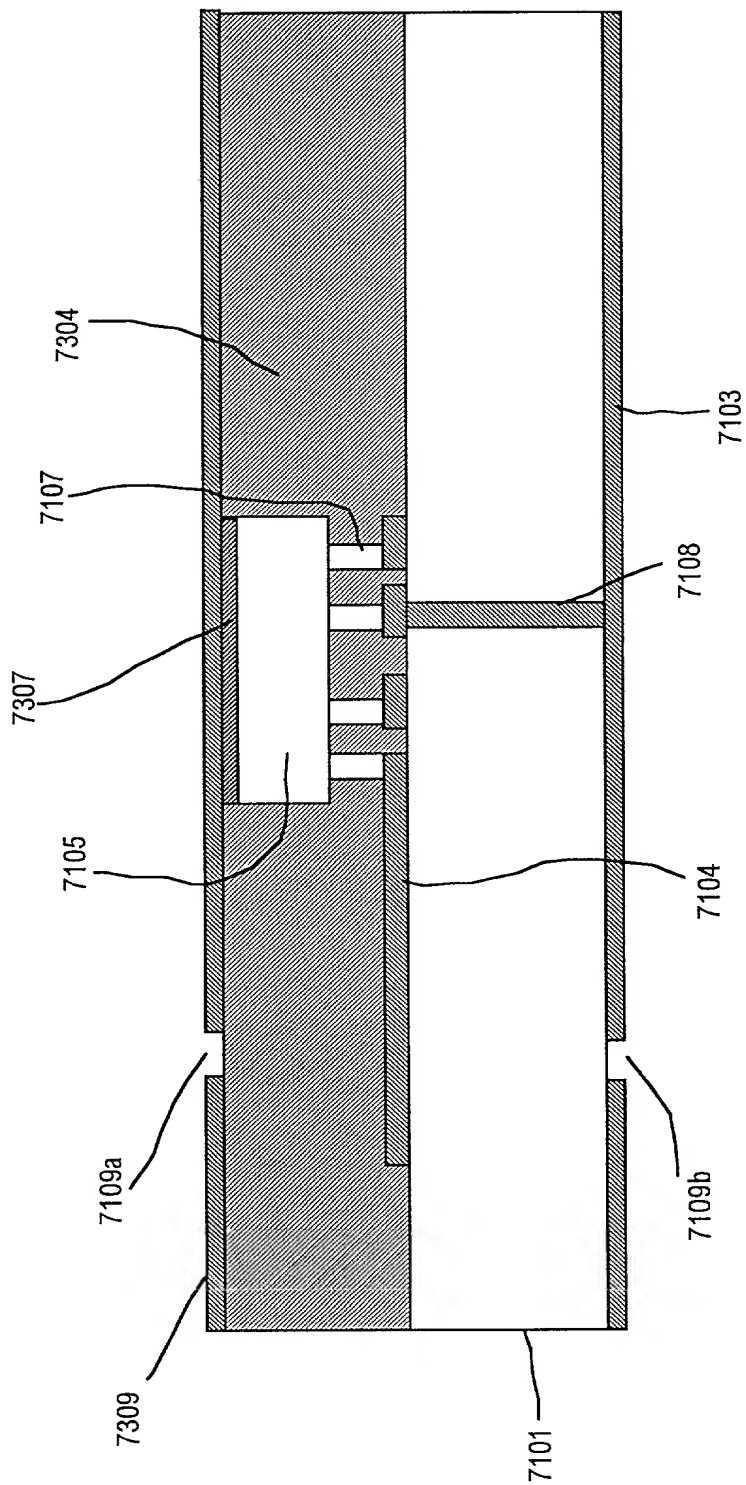


FIG. 64

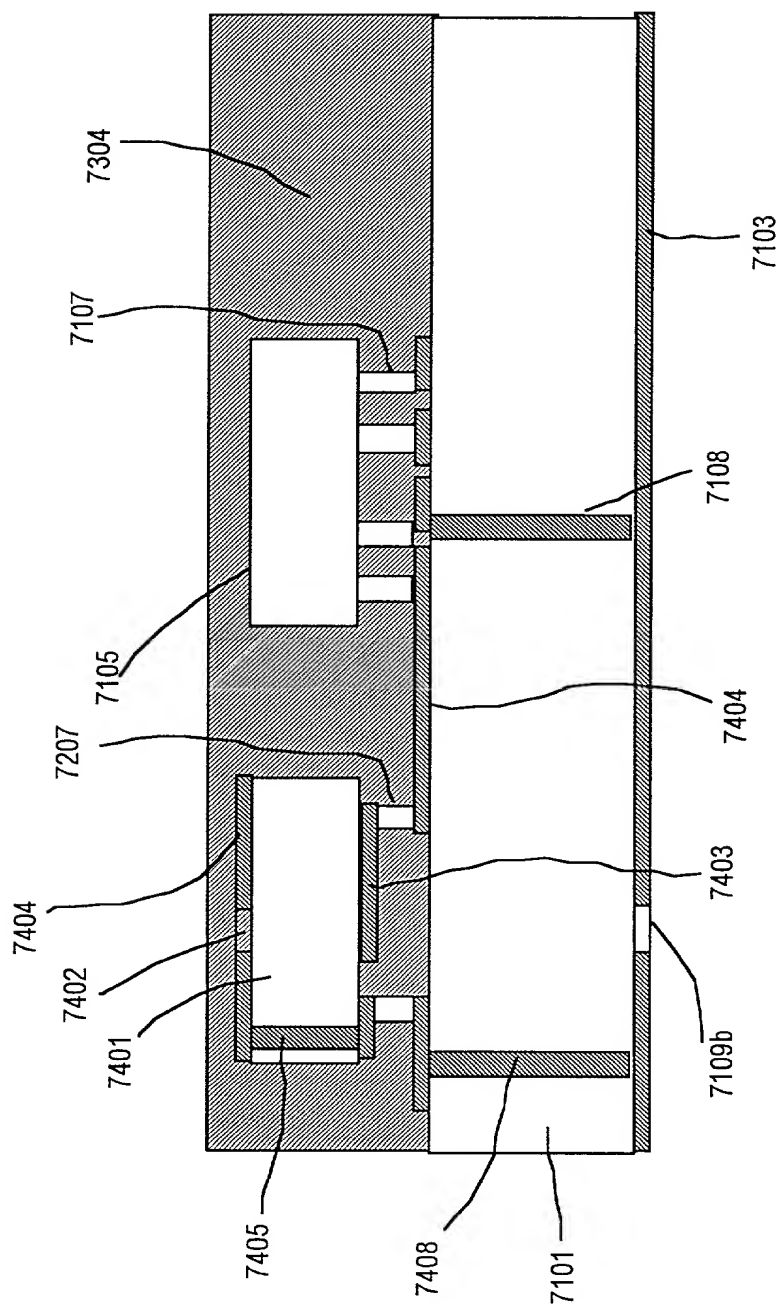


FIG. 65

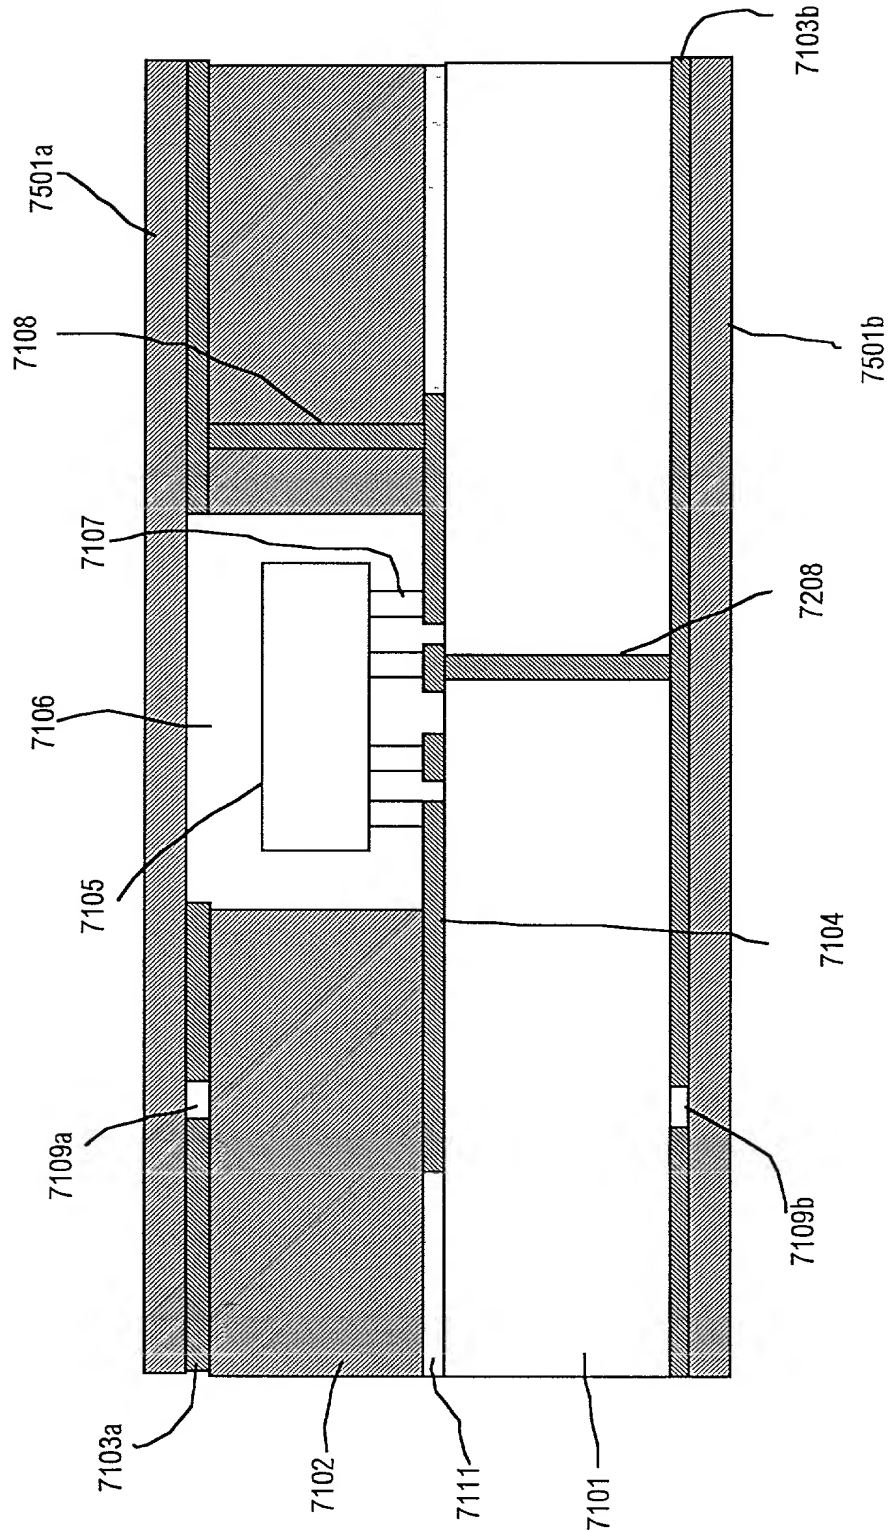
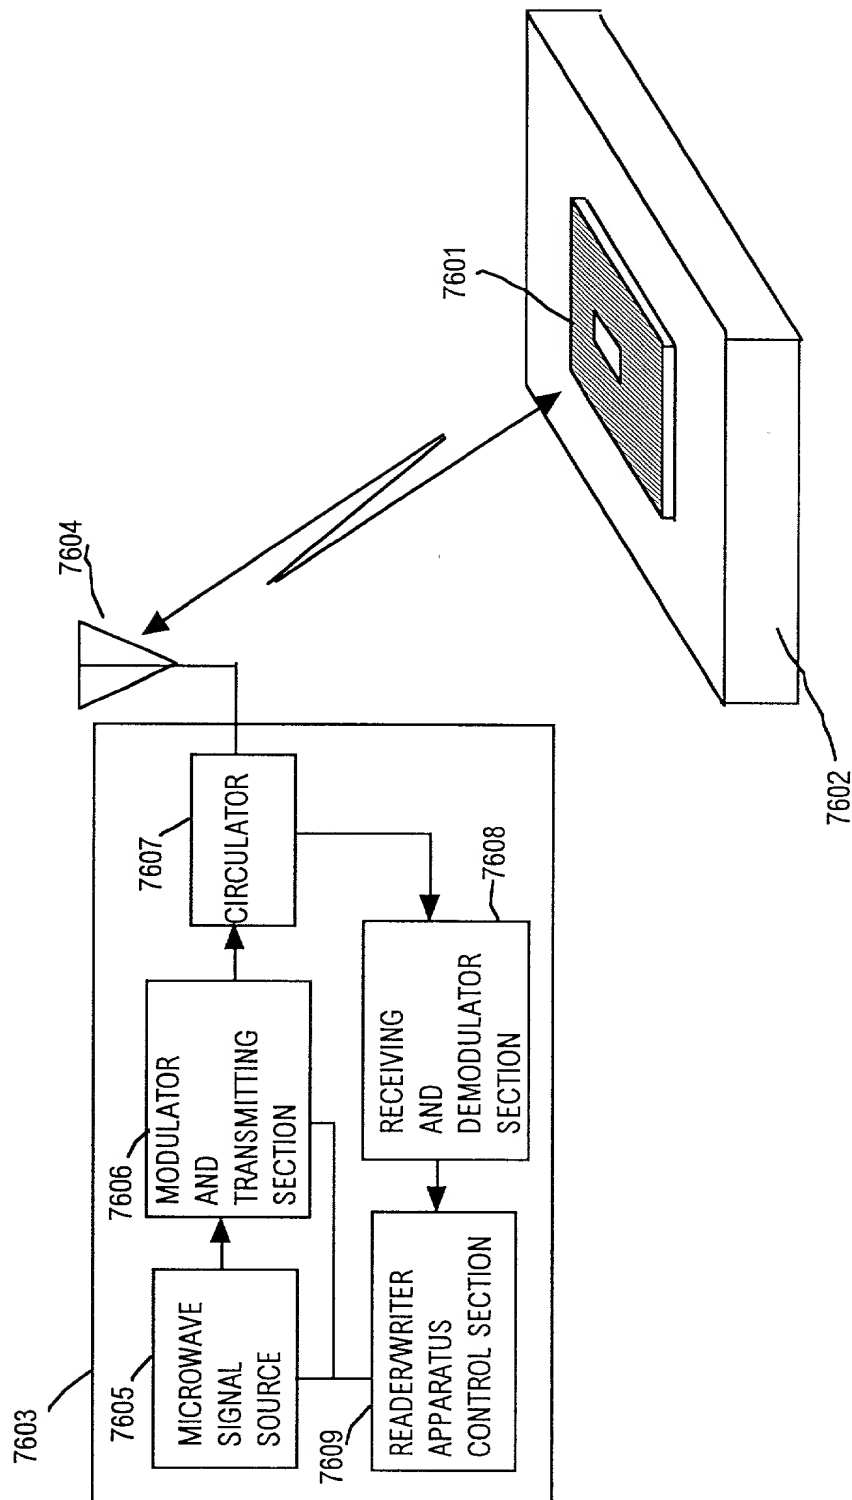
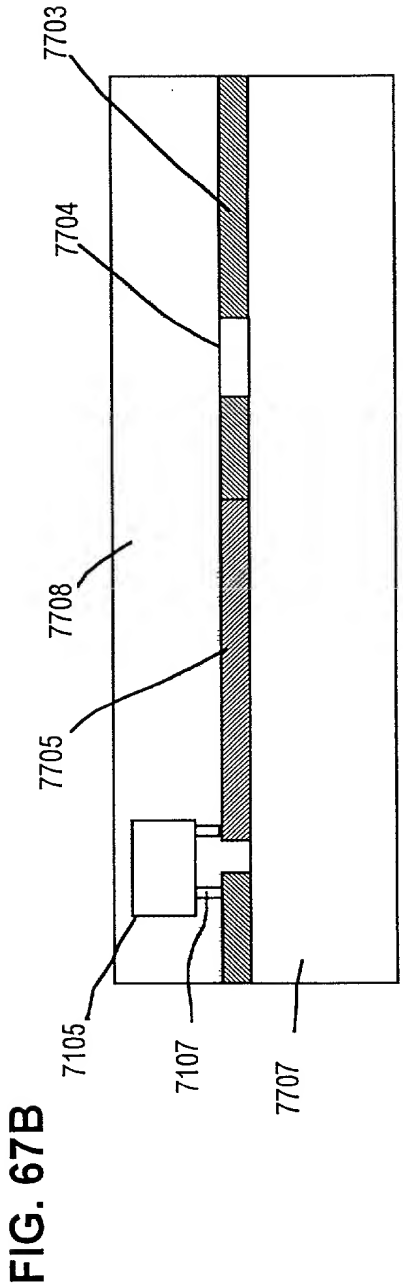
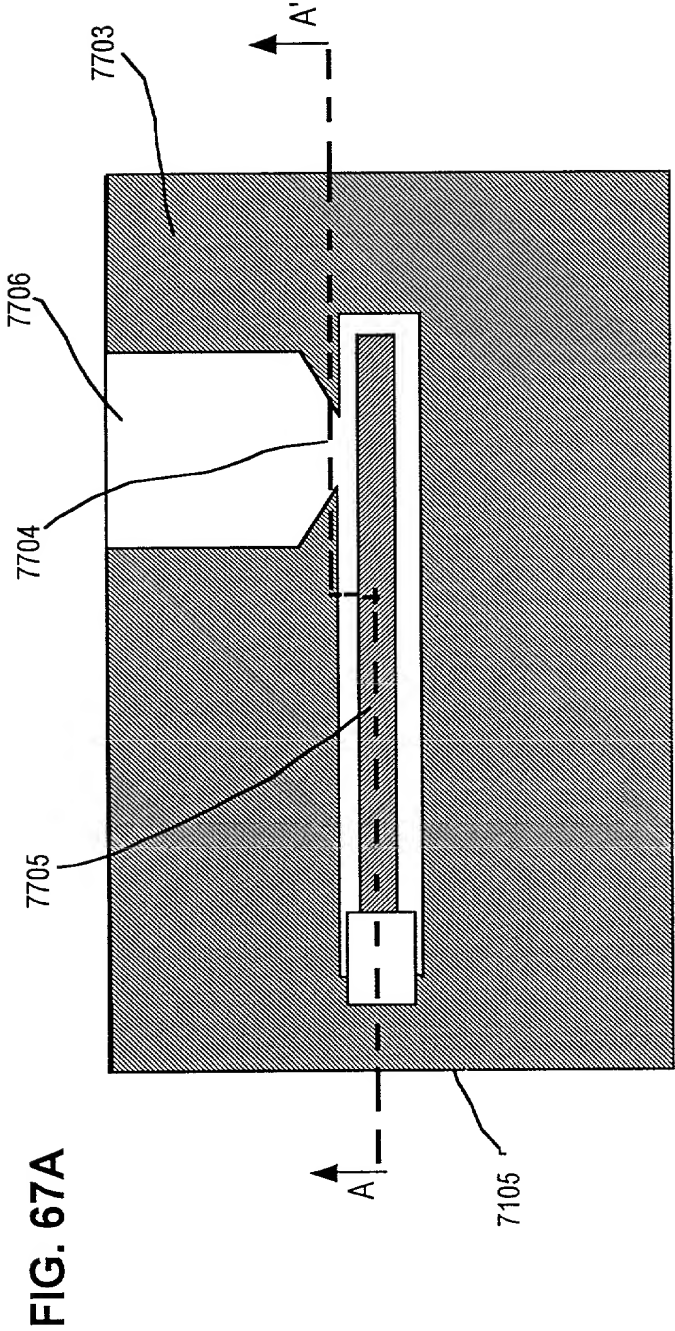


FIG. 66





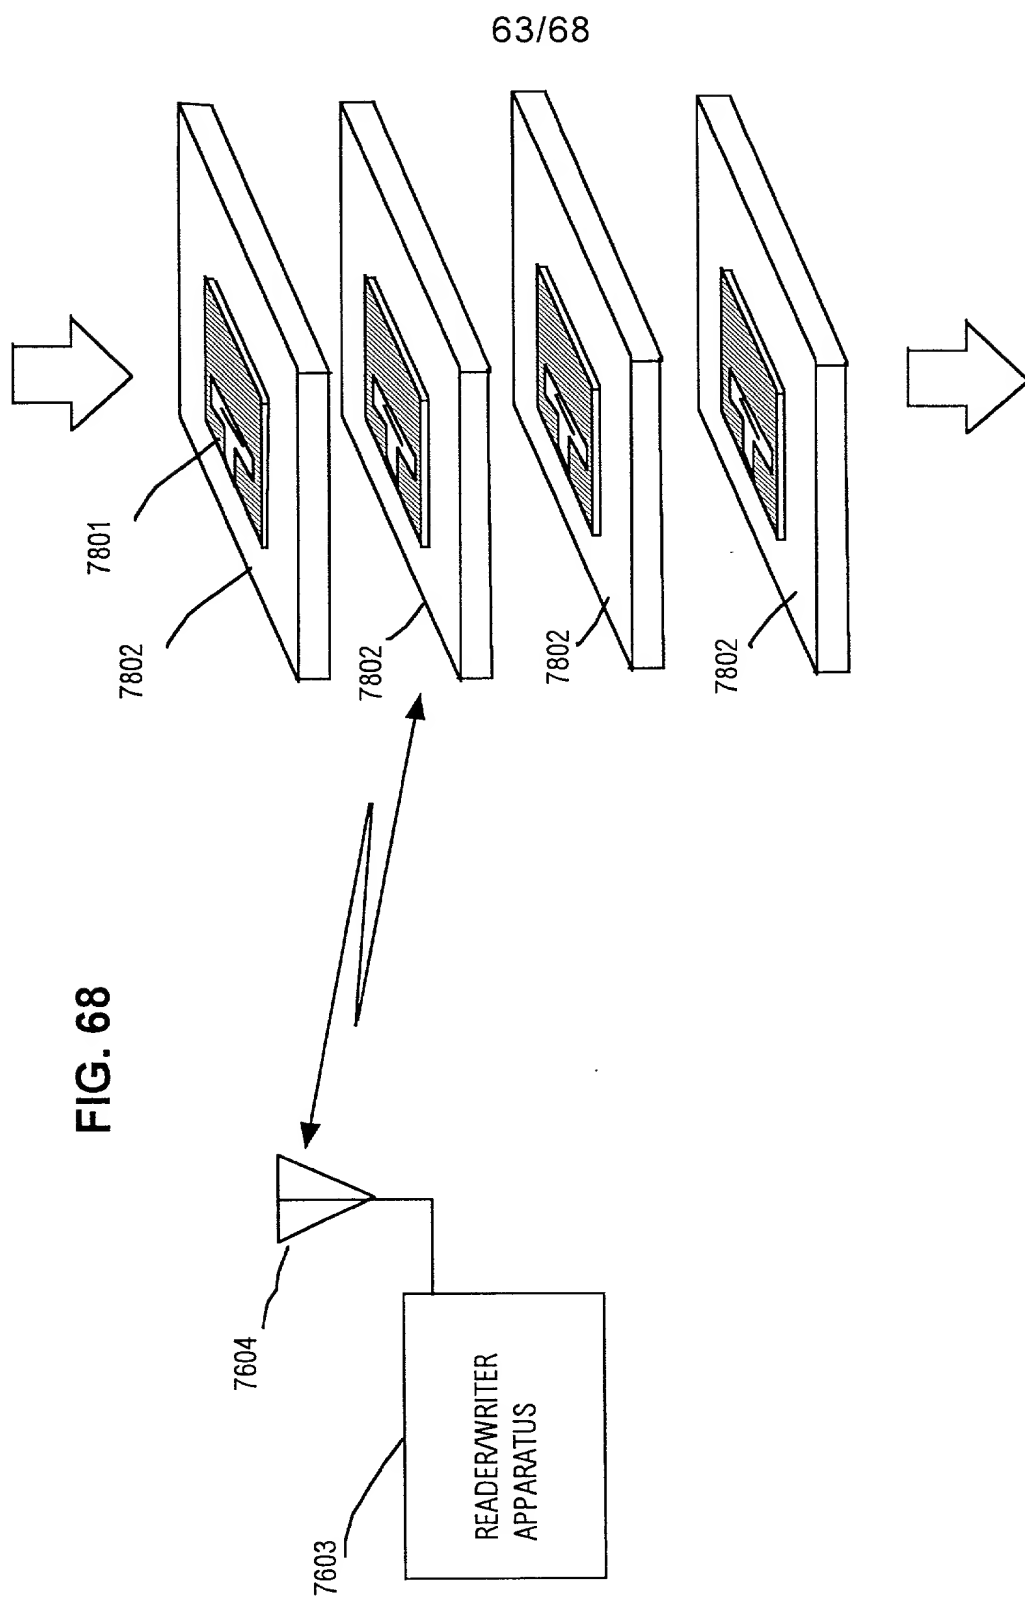


FIG. 69

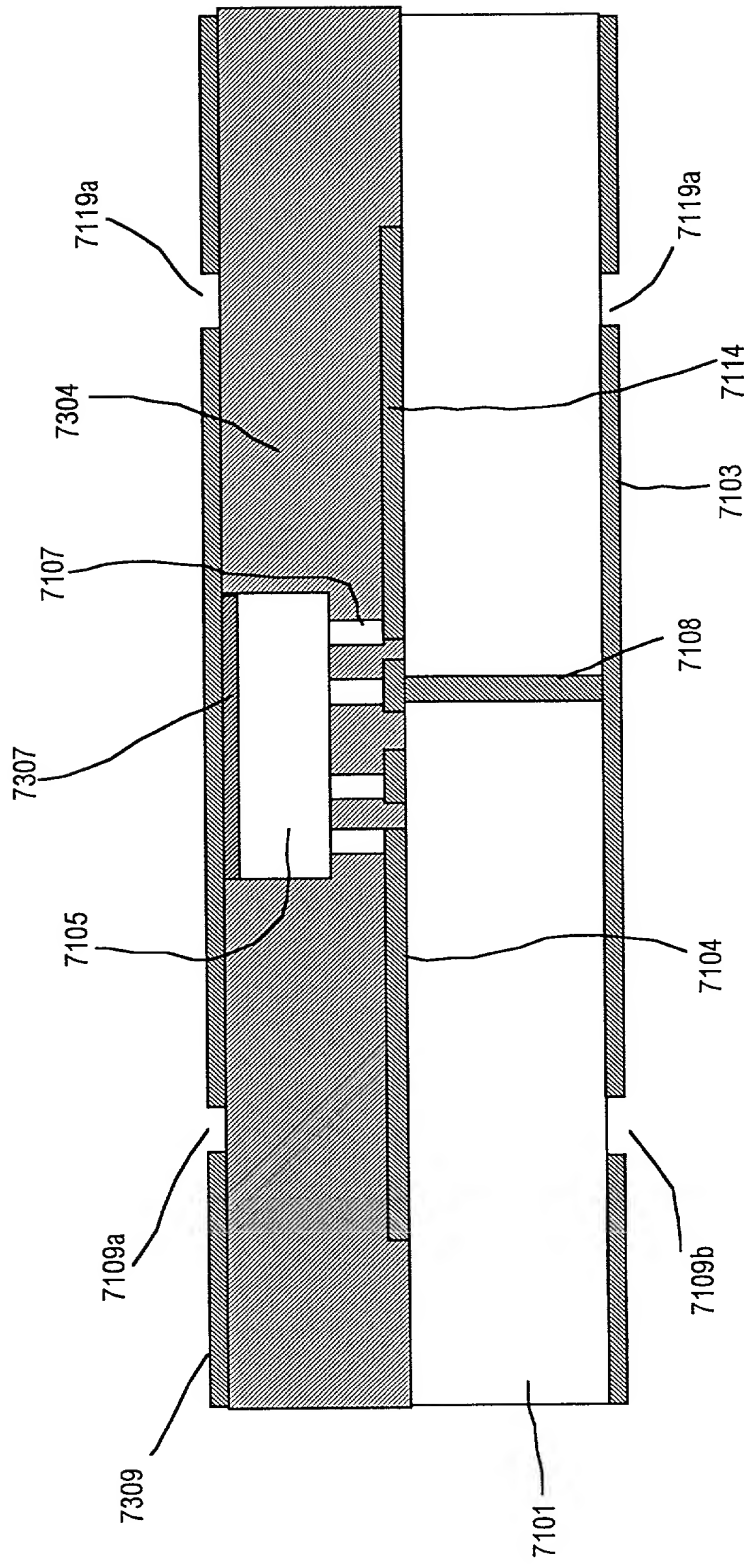


FIG. 70

PRIOR ART

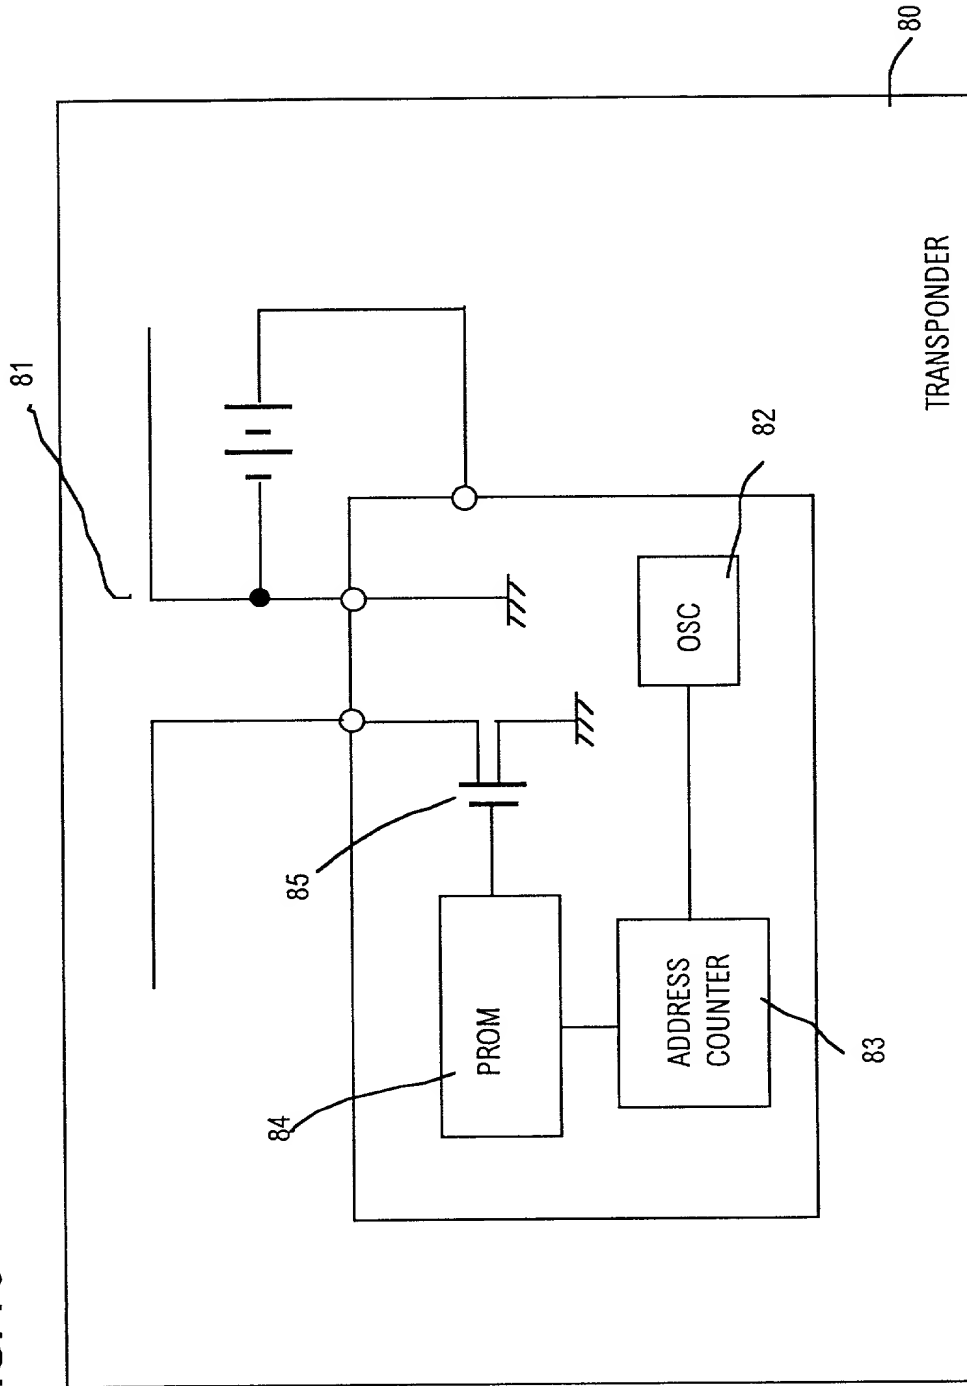


FIG 71

PRIOR ART



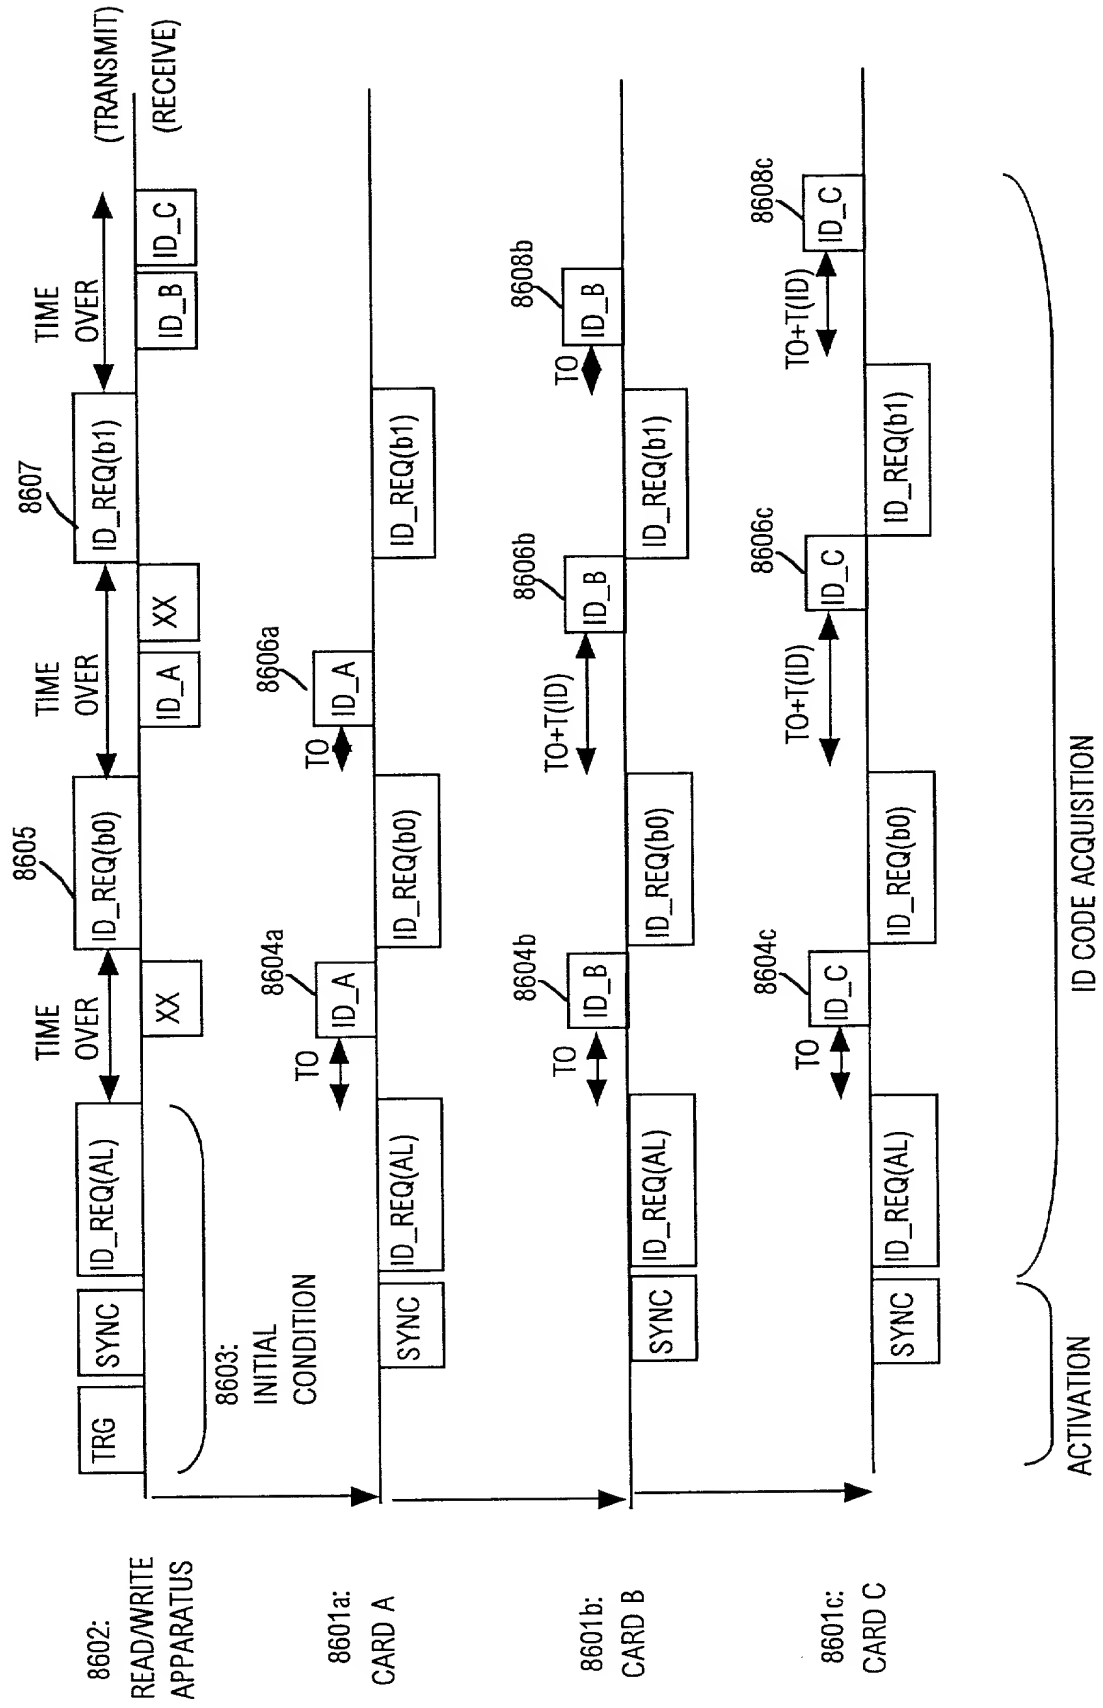


FIG. 72 PRIOR ART

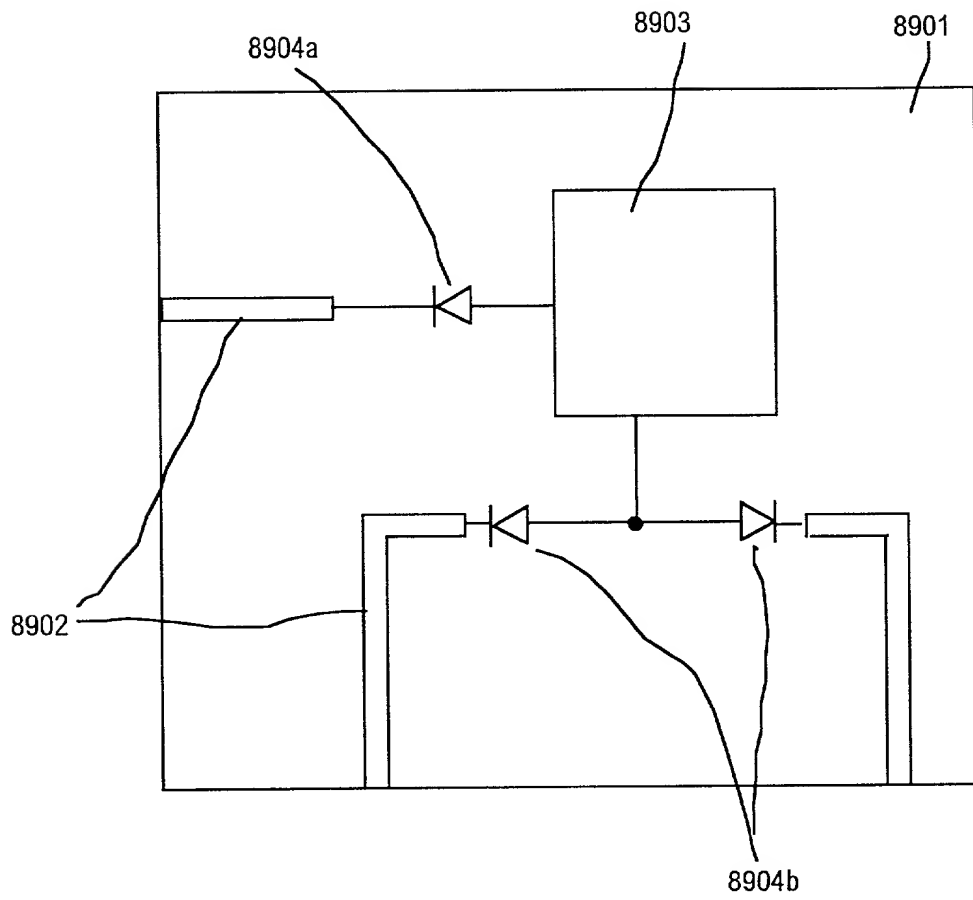

PRIOR ART

FIG. 73

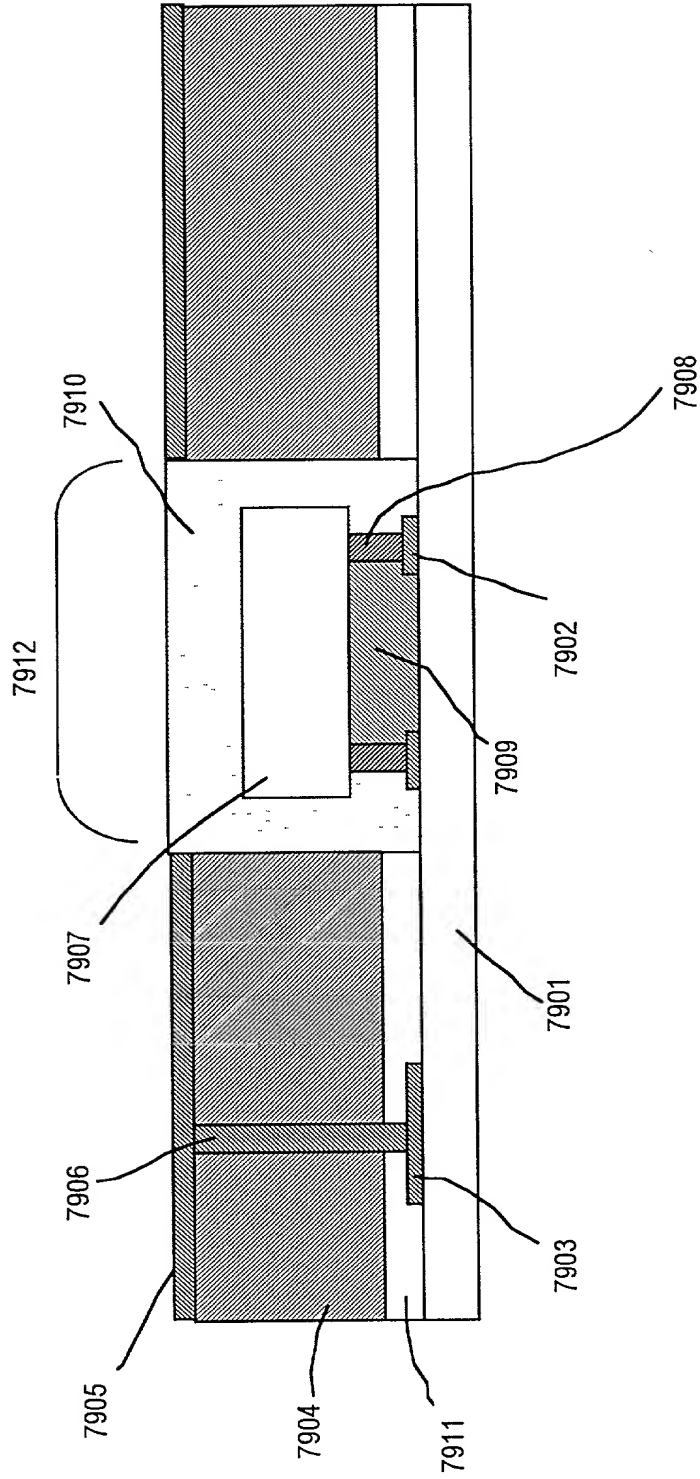

P22547 01
US-00017-SM

APPLICATION FOR UNITED STATES PATENT
Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: MOBILE BODY DISCRIMINATION APPARATUS FOR RAPIDLY ACQUIRING RESPECTIVE DATA SETS TRANSMITTED THROUGH MODULATION OF REFLECTED RADIO described and claimed in the specification: WAVES BY TRANSPONDERS WHICH ARE WITHIN A COMMUNICATION REGION OF AN INTERROGATOR APPARATUS

Check one

*a. ☒ attached hereto.

b. ☐ filed on _____ as Application Serial No. _____ and amended on _____;
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a). Under Title 35 U.S. Code §119, the priority benefits of the following foreign application(s) filed within one year prior to this application are hereby claimed:

Japanese Patent Application No. 11-197063 filed July 12, 1999
Japanese Patent Application No. 11-197062 filed July 12, 1999
Japanese Patent Application No. 11-197060 filed July 12, 1999
Japanese Patent Application No. 11-272405 filed September 27, 1999

The following applications for patent or inventor's certificate on this invention were filed in countries foreign to the United States of America either (a) more than one year prior to this application, or (b) before the filing date of the above-named foreign priority application(s):

2 If there are no corresponding applications,
insert "NONE".

I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent Office:

Roger W. Parkhurst, Reg. No. 25,177; Charles A. Wendel, Reg. No. 24,453; and/or Lawrence D. Eisen, Reg. No. 41,009

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO
PARKHURST & WENDEL, L.L.P., 1421 Prince Street, Suite 210, Alexandria, Virginia 22314-2805 Telephone:
(703) 739-0220.**

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

3 Typewritten Full Name of

Sole or First Inventor Shinichiro Ueno
Given Name Middle Initial Family Name

*4 Inventor's Signature Shinichiro Ueno

5 Date of Signature July 4 2000
Month Day Year

6 Residence Machida-shi Tokyo Japan
City State or Province Country

7 Citizenship Japanese

8 Post Office Address 1745-18, Kiso-cho, Machida-shi, Tokyo 194-0033 Japan
(Insert complete mailing address, including country)

*This form may be executed only when attached to the specification (including claims) at the end thereof if Box a. is checked.

**Note to the Inventor. Please sign name on line 4 exactly as it appears in line 3 and insert the actual date of signing on line 5.

IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE ☒

PAGE 2 OF U.S.A. DECLARATION FORM
(Discard this page in a sole inventor application)

3 Typewritten Full Name of
Second Joint Inventor (if any)

<u>Suguru</u>	<u>Fujita</u>	
Given Name	Middle Initial	Family Name

*4 Inventor's Signature

Suguru Fujita

5 Date of Signature

<u>July</u>	<u>4</u>	<u>2000</u>
Month	Day	Year

6 Residence

<u>Tokyo</u>	<u>Japan</u>	
City	State or Province	Country

7 Citizenship

Japanese

8 Post Office Address
(Insert complete mailing
address, including country)

2-31-11-501, Shimomaruko, Ota-ku, Tokyo 146-0092 Japan

3 Typewritten Full Name of
Third Joint Inventor (if any)

<u>Shinkichi</u>	<u>Ikeda</u>	
Given Name	Middle Initial	Family Name

*4 Inventor's Signature

Shinkichi Ikeda

5 Date of Signature

<u>July</u>	<u>4</u>	<u>2000</u>
Month	Day	Year

6 Residence

<u>Komae-shi</u>	<u>Tokyo</u>	<u>Japan</u>
City	State or Province	Country

7 Citizenship

Japanese

8 Post Office Address
(Insert complete mailing
address, including country)

1-4-11-302, Iwato Minami, Komae-shi, Tokyo 201-0005 Japan

3 Typewritten Full Name of
Fourth Joint Inventor (if any)

<u>Kenichi</u>	<u>Maeda</u>	
Given Name	Middle Initial	Family Name

*4 Inventor's Signature

Kenichi Maeda

5 Date of Signature

<u>July</u>	<u>4</u>	<u>2000</u>
Month	Day	Year

6 Residence

<u>Tokyo</u>	<u>Japan</u>	
City	State or Province	Country

7 Citizenship

Japanese

8 Post Office Address
(Insert complete mailing
address, including country)

2-55-12-607, Sangenjaya, Setagaya-ku, Tokyo 154-0024 Japan

3 Typewritten Full Name of
Fifth Joint Inventor (if any)

<u>Ushio</u>	<u>Sangawa</u>	
Given Name	Middle Initial	Family Name

*4 Inventor's Signature

Ushio Sangawa

5 Date of Signature

<u>July</u>	<u>4</u>	<u>2000</u>
Month	Day	Year

6 Residence

<u>Sagamihara-shi</u>	<u>Kanagawa-ken</u>	<u>Japan</u>
City	State or Province	Country

7 Citizenship

Japanese

8 Post Office Address
(Insert complete mailing
address, including country)

5-10-20, Sagami Ono, Sagamihara-shi, Kanagawa-ken 228-0803 Japan

*Note to Inventors: Please sign name on line 4 exactly as it appears in line 3 and insert the actual date of signing on line 5.

**This form may be executed only when attached to the first page of the Declaration and Power of Attorney form and the specification (including claims) of the application to which it pertains.